



Brandt

EDITORIAL

Brandt always places people at the heart of its expertise. That is why we designed adapted appliances, whose only goal is:

Facilitate everyday life.

We have developed simple and ingenious technologies that meet all needs: whether on a daily basis or on special occasions.

Simply because the **Brandt** appliances are designed by men.

Brand



A historical brand, Brandt is a generalist trademark and is a strong presence in all families of products in the fields of Washing, Cooking, Cooling, Small Appliances.

Since its launch, the Brandt brand mission has been simple: support consumers for their entire lives by providing innovative, useful and relevant products. Making daily life easier by providing adapted equipment is then written into in the brand's DNA. A pioneer of its innovations, Brandt has set itself apart from the competition by being a technological leader with automatic variable ability or automatic laundry detergents dispensing... for example. Whether in the field of Washing, Cooking or Cooling, many of Brandt's products have been at the top of the sales charts and will have continued impact on current and future generations.

History

Brandt is named after Edgar Brandt, a leading wrought iron craftsman from the beginning of the 20th century. Initially a locksmith and metalwork business, he created famous works, including bronze slab of the Unknown Soldier Monument in 1921, located in the middle of the Arc de Triomphe. The firm made a move into household appliances in the 1950s. This is how the company started to invent its first washing machines, refrigerators and ironing presses. In June 1956, Edgar Brandt offers to the Château de Versailles in Paris, the two beautiful gilded gates of the Great Court of Ambassadors, destroyed during the Revolution.

INNOVATION

Brandt is a ceaseless innovator, aiming to make household appliances accessible to all.

1949

First manual top-loading washing machine with agitator.

1967

The top refrigerator brand in France.

1969

The 1st French dishwasher is released from the Brandt factories.

1970

First variablespeed and automatic variable capacity washing.

1985

Launch of the 1st built-in appliances collection.

1990

1st induction hob.

2007

Launch of small appliances. Blenders,kitchen machine, kettles.

2008

Dose-e, first top-loading washing machine with dispenser and built-in detergent measure.

2010

Induction hob
MAXIZONE. The 1st
40 x 23 cm. "maximum
capacity" cooking area.

2016

Intellect year! This new home appliances generation shows all innovations of the brand since its creation.

2021

Hygiène program removes more than 99.9% of bacteria and viruses, including COVID-19*. * tested and approved by VirHealth Luon.






























ORIGINE FRANCE

In the world of household appliances, Brandt is the last major player in the Large Household Appliances sector to design and manufacture cooking products in France. Its production is spread across the sites in Orléans (45) and Vendôme (41). The Orléans factory has a Research and Development department, and the After-Sales Service is located near Cergy-Pontoise (95).

Brandt, the labelled French household appliance

An integral part of French culinary heritage, the majority of our cooking appliances have been certified as "Origine France Garantie" since 2011. Conducted by an independent organization, the "Origine France Garantie" certification provides a clear and objective indication of origin. It serves as a marker of quality and excellence, guaranteeing the traceability of household appliances.

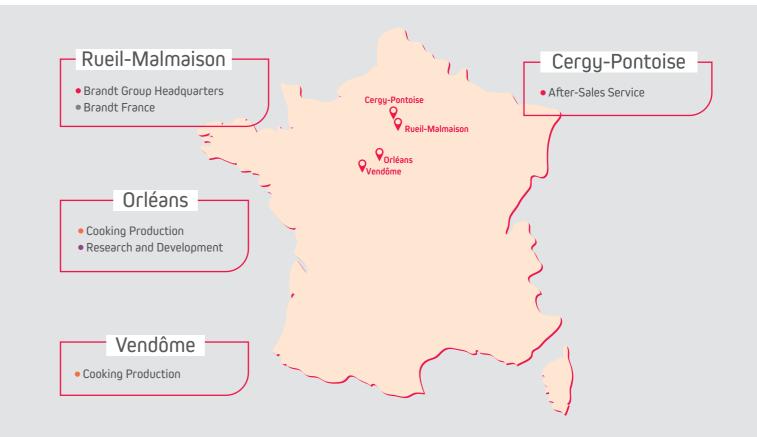

|4|



Cooking	8
■ Steam combination oven	10
Ovens	12
Microwaves	24
Induction hobs	34
■ Vitroceramic hobs	48
Glass and enamelled hobs	54
Hoods	62
Washing	76
■ Full built-in dishwashers	78
■ Built-in dishwashers	84
■ Full built-in front-loading washing machine	88
Cooling	90
■ Built-in Fridge freezer	92
■ Built-In Single door	94
■ Wine Cellars	98
■ Technical charts	102



Made in France Design and Technology

This Brandt collection, developed and manufactured in France, is a testament to the company's expertise in combining aesthetics and functionality. Perfectly in tune with current technology and design trends, the collection has been expanded with new models featuring a touch-sensitive interface and

FRANCE

a large TFT screen animated with beautiful photos to illustrate the pre-programmed modes and dishes, and is now available in Full Black for added elegance and refinement.



New 3-in-1 pyrolysis oven BOR7586B More inspiration and flavour!

To no longer have to choose between different models and cooking modes, this oven has a **Multifunction Plus** for all your daily or festive menus, a **Combined Steam** mode for fluffy, golden and crispy dishes, and a **100% Steam** mode for healthy, dietetic dishes.







Culinary excellence in every mode*

Discover **true Fan assisted heat:** ideal for preparing different dishes simultaneously on 3 levels; pizzas or tarts have never been so delicious as with **Combined Heat**, this exclusive mode specially designed for "wet" cooking. The **Smart Assist** function is there to give you the support you need. According to the coking mode chosen, the oven suggests not only the ideal temperature but also the adapted cook time. Thanks to the numerous recipes pre-programmed for automatic cooking on the **Cooking Guide** or **Steam Guide**, culinary success is guaranteed at every meal. And with the new **Steam Cooking** functions, you're guaranteed to save cooking time and improve nutritional quality!



Maintenance in its purest form*!

Are you fussy about the cleanliness of your oven?
With their smooth, highly resistant and easyto-maintain interior enamel, ovens* are now available
with new features in this area:

- Steam cleaning by hydrolysis: simpler and more environmentally friendly!
- Clean 39' and Pyro Express pyrolysis cleaning: faster and more economical!
- Auto or Turbo Pyrolysis: tailor-made to your requirements!

*depending on model 9

New 3-in-1 oven A Brandt innovation for a concentrate of flavours

This pyrolysis combi oven will revolutionise your culinary world, offering Multi-Function Plus, Combi-Discover its benefits.

- Its 11 Multifunction Plus positions give you all the resources you need to prepare your daily or festive menus with flair.
- The Combi-Steam mode, combined with the Multifunction function, makes it possible to prepare soft, golden and crispy dishes at the same time.
- In 100% Steam mode, you can cook healthily, without adding fat, while preserving the flavour of your food.



To successfully vary your daily pleasures and menus

Combi-cooking and 100% steam means multitude of intelligent cooking programmes to help you prepare your dishes and achieve remarkable culinary results that are healthy, dietetic and above all delicious.

In the culinary guide, you'll find 35 pre-programmed recipes for traditional and hot air cooking, 38 for combined steam cooking and 25 for 100% steam cooking.



Remarkable ease of use and comfort

So easy to use with its removable backlit water tank; opening and draining are automatic.

Equipped with the **Soft close** system, the oven door, designed with 4 layers of glass, easy to clean during cooking and pyrolysis.

Its pyrolysis **cleaning system** adapts to your needs with nuance and efficiency.

- Using the residual heat from a previous cooking, the Clean 39' function neutralises odours between two cookings in 39 minutes;
- Pyro Express cleans the cavity in 59 minutes, saving 50% energy.
- In Auto Pyrolysis mode, leave it to your oven to automatically manage the time required according to the degree of soiling detected. In Turbo mode, your oven will be out of action for just two hours.



Ingenious cooking accessories

To assist you skillfully in the preparation of all your dishes, this combi oven provides a highly functional and complete set of equipment: an anti-tipping grid designed to safely extend from the oven, drip trays with depths of 20 and 45mm, featuring a front handle for easy handling, a stainless steel dish, and its support for flavorful steaming.






BOR7586BB FULL BLACK

- Multifunction Plus
- Combi steam
- 100% Steam
- Pyrolysis cleaning
- Fan assisted heat function
- Volume: 73 litres
- Energy efficiency class: A+
- Electronic programmer: TFT Colour
- 11 cooking functions
- Culinary Guide: 35 recipes
- Steam Guide: 25 recipes
- Combi Steam Guide: 37 recipes
- Drying function
- Sabbath function
- Smart Assist
- Pyro Express, Pyro Eco, Pyro Turbo
- Automatic water tank opening
- Soft close door
- Cold door 4 glasses
- 1 anti-tipping safety flat grid
- 1 drip tray 20mm and 1 drip tray 45mm
- 1 stainless steel steamer + support
- Removable full glass inner door
- Built-in dimensions (H x W x D mm): 585x560x550

60cm Steam combination Oven scheme







BOP7568LX INOX

- Multifunction Plus
- Pyrolysis cleaning
- Quattro Pulse technology
- Fan assisted heat function
- Volume: 73 litres
- Energy efficiency class: A+
- Electronic programmer: TFT colour
- 11 cooking functions
- Autocook: 12 recipes
- Culinary Guide: 12 recipes
- Steam guide: 10 recipes
- Smart Assist
- Clean 39', Pyro Auto, Pyro Turbo
- Soft close door
- Cold door 4 glasses
- 1 anti-tipping safety flat grid
- 1 drip tray 20mm and 1 drip tray 45mm
- Removable full glass inner door
- Built-in dimensions (H x W x D mm): 585x560x550





BOP7544B BLACK

- Multifunction Plus
- Pyrolysis cleaning
- Fan assisted heat function
- Volume: 73 litres
- Energy efficiency class: A+
- Electronic programmer: White LED
- 9 cooking functions
- Culinary guide: 12 recipes
- Smart Assist
- Pyro Express, Pyro Eco, Pyro Turbo
- Soft close door
- Cold door 4 glasses
- 1 anti-tipping safety flat grid
- 1 drip tray 20mm and 1 drip tray 45mm
- Removable full glass inner door
- Built-in dimensions (H x W x D mm): 585x560x550

Perfection from every angle

Designed and manufactured in France, this Multifunction Plus oven is the result of the brand's latest technical advances and has been carefully through in terms of design and functionality.

• Elegant combination of glass and steel, total black look or enhanced with stainless steel.

B0P7568BB

- Spacious 73-litre capacity, with 6 levels of shelves for cooking a wide range of dishes.
- Intuitive, innovative programming: touch controls, colour graphic display with photos, automatic recipe guides and Smart Assist for guaranteed results.
- Energy performance: A+ in energy labelling

OuattroPulse

This muffle construction concept circulates hot air within the cavity at an increased speed, thereby ensuring an even distribution of heat. The temperature is uniform in 100% of the cavity to guarantee a quality and a perfect result at your cooking and all your dishes.



Autocook 12 recipes

It's so easy to become a cordon bleu! This programme automatically manages all the cooking parameters (temperature, cooking mode and cooking time). Select the type of dish, put it in the oven at the recommended level and enjoy once it's done.



BOP7539BB FULL BLACK

- Multifunction Plus
- Pyrolysis cleaning
- Fan assisted heat function
- Volume: 73 litres
- Energy efficiency class: A+
- Electronic programmer: White LED
- 9 cooking functions
- Steam cooking Fish
- Steam cooking Poultry
- Steam cooking White meat
- Smart Assist
- Clean 39', Pyro Auto, Pyro Turbo
- Soft close door
- Cold door 4 glasses
- 2 anti-tipping safety flat grid
- 1 drip tray 20mm and 1 drip tray 45mm
- Removable full glass inner door
- Built-in dimensions (H x W x D mm): 585x560x550





BOP7537W WHITE

- Multifunction Plus
- Pyrolysis cleaning
- Fan assisted heat function
- Volume: 73 litres
- Energy efficiency class: A+
- Electronic programmer: White LED
- 9 cooking functions
- Steam cooking Fish
- Steam cooking Poultry
- Steam cooking White meat
- Smart Assist
- Clean 39', Pyro Auto, Pyro Turbo
- Cold door 4 glasses
- 1 anti-tipping safety flat grid
- 1 drip tray 20mm and 1 drip tray 45mm
- Removable full glass inner door
- Built-in dimensions (H x W x D mm): 585x560x550










B0P7537BB

B0P7537B

B0P7537LX

60cm Pyrolysis Ovens scheme

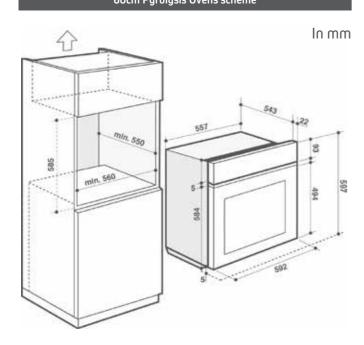

Steam Cooking. New recipe of savours

This function, designed for cooking fish, poultry or white meat, automatically combines Traditional and Steam cooking modes. Select your dish, pour lukewarm water into the drip tray and place your preparation on a top rack to quickly obtain food with preserved nutritional qualities.

Cold door 4 glasses: comfort and safety

The iridescent panes ensure that during cooking or pyrolysis, the surface temperature remains below the burn threshold (65°C)!

A+ CLASS

Brandt efficiency and quality, made in France





BOP7533BB FULL BLACK

- Multifunction Plus
- Pyrolysis cleaning
- Fan assisted heat function
- Volume: 73 litres
- Energy efficiency class: A+
- Electronic programmer: White LED
- 9 cooking functions
- Steam cooking Fish
- Steam cooking Poultry
- Steam cooking White meat
- Smart Assist
- Clean 39', Pyro Auto, Pyro Turbo
- Cold door 4 glasses
- 1 anti-tipping safety flat grid
- 1 drip tray 20mm and 1 drip tray 45mm
- Removable full glass inner door
- Built-in dimensions (H x W x D mm): 585x560x550





BOP2438B BLACK

- Multifunction Plus
- Pyrolysis cleaning
- Fan assisted heat function
- Volume: 67 litres
- Energy efficiency class: A+
- Electronic programmer: White LCD
- 10 cooking functions
- Culinary Guide: 12 recipes
- Steam guide: 10 recipes
- Smart Assist
- Pyro Express, Pyro Eco, Pyro Turbo
- Soft close door
- Cold door 4 glasses
- 1 anti-tipping safety flat grid
- 1 drip tray 8mm and 1 drip tray 45mm
- Removable full glass inner door
- Built-in dimensions (H x W x D mm): 585x560x550

Steam Guide. New recipe of efficiency

Choose your dish from the pre-programmed recipes. The oven automatically combines Traditional and Steam cooking modes and calculates the appropriate temperature and cooking time for the chosen dish.



BOP7332B BLACK

- Multifunction
- Pyrolysis cleaning
- Fan assisted heat function
- Volume: 73 litres
- Energy efficiency class: A+
- Electronic programmer: White LED
- 6 cooking functions
- Smart Assist
- Pyro Turbo
- Cold door 4 glasses
- 1 anti-tipping safety flat grid
- 1 drip tray 20mm and 1 drip tray 45mm
- Removable full glass inner door
- Built-in dimensions (H x W x D mm): 585x560x550



BOP2432X INOX


- Multifunction
- Pyrolysis cleaning
- Volume: 67 litres
- Energy efficiency class: A+
- Electronic programmer: White LCD
- 10 cooking functions
- Culinary Guide: 12 recipes
- Steam guide: 4 recipes
- Smart Assist
- Pyro Express, Pyro Eco, Pyro Turbo
- Cold door 4 glasses
- 1 anti-tipping safety flat grid
- 1 drip tray 8mm and 1 drip tray 45mm
- Removable full glass inner door
- Built-in dimensions (H x W x D mm): 585x560x550



Thanks to the Culinary Guide

Choose from one of 12 pre-programmed recipes. Your oven automatically selects the mode, the time and the cooking temperature from the weight of the food that you will have indicated.

In mm

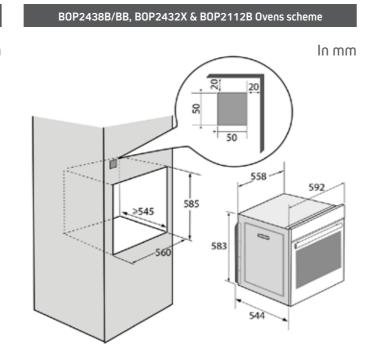



BOP2112B BLACK

- Multifunction
- Pyrolysis cleaning
- Volume: 67 litres
- Energy efficiency class: A+
- Electronic programmer: Red LED
- 10 cooking functions
- Steam cooking Fish
- Steam cooking Poultry
- Steam cooking White meat
- Smart Assist
- Pyro Express, Pyro Eco, Pyro Turbo
- Cold door 4 glasses
- 1 anti-tipping safety flat grid
- 1 drip tray 45mm
- Removable full glass inner door
- Built-in dimensions (H x W x D mm): 585x560x550





BOH7534LX INOX

- Multifunction Plus
- Hydrolysis cleaning
- Fan assisted heat function
- Volume: 73 litres
- Energy efficiency class: A+
- Electronic programmer: White LED
- 7 cooking functions
- Smart Assist
- Clean
- Soft close door
- 1 anti-tipping safety flat grid
- 1 drip tray 20mm and 1 drip tray 45mm
- Removable full glass inner door
- Built-in dimensions (H x W x D mm): 585x560x550









B0H7532LX

B0H7532B

BOH7532BB FULL BLACK

- Multifunction Plus
- Hydrolysis cleaning
- Fan assisted heat function
- Volume: 73 litres
- Energy efficiency class: A
- Electronic programmer: White LED
- 7 cooking functions
- Steam cooking Fish
- Steam cooking Poultry
- Smart Assist
- Clean
- 1 anti-tipping safety flat grid
- 1 drip tray 20mm and 1 drip tray 45mm
- Removable full glass inner door
- Built-in dimensions (H x W x D mm): 585x560x550

Hydrolysis Clean; Simple, environmentally friendly steam cleaning!




Spend less time cleaning your oven and do something that's also environmentally responsible. Spray 300 ml of water onto

the walls of the cavity and turn the lever to the Clean position. The cleaning process will take 35 minutes!

Smart Assist. More intelligence and flavour!

According to the cooking mode chosen, the oven suggests not only the ideal temperature but also the adapted cooking time.

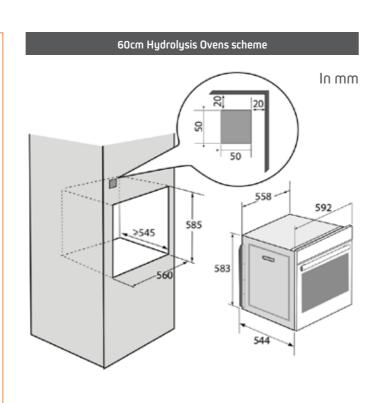



Culinary success on the menu!

Multifunction plus

- **rotating heat** distributes the temperature evenly throughout the oven cavity. Ideal for cooking different dishes simultaneously on 3 levels.
- **the combined heat,** specially designed for "moist" cooking, guarantees perfect baking for your best pies

Steam Cooking

This function, dedicated to cooking **fish or white meat,** enables your oven to automatically combine Traditional and Steam cooking modes. Select your dish, pour warm water into the drip tray and place your preparation on an upper rack to quickly obtain food with preserved nutritional qualities.



in BLACK

B0H3415A

BOH3415X INOX

- Multifunction Plus
- Hydrolysis cleaning
- Volume: 73 litres
- Energy efficiency class: A
- Electronic programmer: White LCD
- 10 cooking functions
- Culinary Guide: 12 recipes
- Steam guide: 10 recipes
- Smart Assist
- Clean
- 1 anti-tipping safety flat grid
- 1 drip tray 45mm
- Removable full glass inner door
- Built-in dimensions (H x W x D mm): 585x560x550



Available model in INOX



B0H1325X

BOH1325BB FULL BLACK

- Multifunction Plus
- Hydrolysis cleaning
- Fan assisted heat function
- Volume: 73 litres
- Energy efficiency class: A
- Electronic programmer: White LED
- 8 cooking functions
- Clean
- 1 anti-tipping safety flat grid
- 1 drip tray 45mm
- Removable full glass inner door
- Built-in dimensions (H x W x D mm): 585x560x550

To bring out the flavour of your white meats, fish or poultry

Steam Guide... 10 recipes

Choose your dish from the pre-programmed recipes*. The oven automatically combines Traditional and Steam cooking modes, and calculates the temperature and cooking time for the dish you have chosen.

Simply pour lukewarm water into the drip tray on the bottom shelf and place your preparation on the top rack. The result: fish, poultry and white meat cook faster, while preserving their nutritional qualities.

60cm Hydrolysis Ovens scheme In mm

Brandt

Available model in FULL BLACK



B0H1224BB

BOH1224X INOX

- Multifunction Plus
- Hydrolysis cleaning
- Fan assisted heat function
- Volume: 73 litres
- Energy efficiency class: A
- Electronic programmer: White LED
- 8 cooking functions
- Clean
- 1 anti-tipping safety flat grid
- 1 drip tray 45mm
- Removable full glass inner door
- Built-in dimensions (H x W x D mm): 585x560x550







Available model in INOX

B0H1222X

In mm

BOH1222BB FULL BLACK


- Multifunction
- Hydrolysis cleaning
- Volume: 73 litres
- Energy efficiency class: A
- Electronic programmer: White LED
- 6 cooking functions
- Clean
- 1 anti-tipping safety flat grid
- 1 drip tray 45mm
- Removable full glass inner door
- Built-in dimensions (H x W x D mm): 585x560x550

BOH1222BB/X Oven scheme

BOE1120X INOX

- Multifunction Plus
- Manual cleaning
- Fan assisted heat function
- Volume: 65 litres
- Energy efficiency class: A
- Electronic programmer: Red LED
- 8 cooking functions
- 1 anti-tipping safety flat grid
- 1 drip tray 45mm
- Removable full glass inner door
- Built-in dimensions (H x W x D mm): 585x560x550

BOE1120X Oven scheme

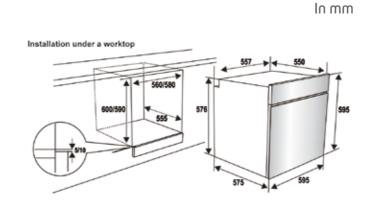


BOE1000X INOX

- Natural convection
- Manual cleaning
- Volume: 72 litres
- Energy efficiency class: A
- 5 cooking functions
- 1 anti-tipping safety flat grid
- 1 drip tray 45mm
- Removable full glass inner door
- Built-in dimensions (H x W x D mm): 585x560x550

BOE1000X Oven scheme

In mm



A CLASS

Excellent insulation, controlled management of temperature cooking and energy savings: Brandt quality, Made in France.

Removable full glass inner door

It provides a large, flat surface that cleans easily with a wipe of a sponge. For greater convenience, you can also unclip the glass to clean it completely and make it shine like new.





Harmonious design and functionality

Solo or Combi microwaves, with or without grill, in small or large capacity... Brandt offers a wide collection designed to fit into standard niches and ensure a beautiful unity in all kitchen spaces. Their graphic lines and sleek control panels, with touch-sensitive controls or knobs, coordinate perfectly with those of the built-in ovens.



Electronics for greater precision

Brandt has chosen to equip all its models with an electronic programming mode. The touch-sensitive controls allow intuitive and precise adjustment and make cleaning very easy.



QUATRO PULSE

Thanks to a heat diffusion process - rapid injection of hot air and completely reworked holes - the temperature is uniform in 100% of the cavity to guarantee a quality and a perfect result at your cooking and all your dishes. (Only for BKC7154 and BMS7120 microwaves)



Combined grill and microwave to light up your dishes

The 100% grill function adds crispiness to your gratins, tarts, and pizzas. And in Combined Grill+Microwave mode, you can heat, brown and brown to perfection.



Space and a large turntable... a sense of comfort

All models (except 17 litre) have a maxi turntable (up to 36.6 cm in diameter) that can be disengaged to accommodate large square dishes, for example. The tray integrated into the base of the cavity makes it easy to place or remove dishes in complete safety.



The guarantee of a perfect result!

Automatic cooking function

Allows you to cook simply! Just select the type of food among the 8 proposed and input the weight. The microwave then automatically suggests the appropriate cooking mode and time.

Defrost function

Defrosts your food 6 times faster by calculating the ideal time according to the size and weight of the food. For example, four 100 g minced steaks will defrost in just 1 min 40 seconds!



Available models in WHITE and INOX



BKC7154W

180" "3000

26



BKC7154LX

BKC7154BB FULL BLACK

- 40 litres
- Combined
- Circulating heat 1,685W
- Grill 1,750W
- 10 cooking functions
- Electronic programming
- Knob
- Automatic cooking
- Quattro System
- Speed Defrost
- Timer 60 minutes
- Maxi turntable 36cm removable
- 1 safety grid and 1 enamelled tray
- Electronic child safety
- Enamelled cavity
- Power 1,000W
- Built-in dimensions (H x W x D mm): 450x560x550





- 3 memories
- Timer 60 minutes

Automatic cooking

■ Maxi turntable 36cm removable

Dual display/Touch sensitive

- 1 safety grid and 1 enamelled tray
- Electronic child safety
- Enamelled cavity
- Power 1,000W





BKS7131BB FULL BLACK

- 40 litres
- Solo
- 11 cooking functions
- Electronic programming
- Knob
- Automatic cooking
- Speed Defrost
- Timer 60 minutes
- Maxi turntable 36cm removable
- Electronic child səfety
- Enamelled cavity
- Power 1,000W
- Built-in dimensions (H x W x D mm): 450x560x550




Combine the best of cooking!

Quattro System, Fan assisted heat, Grill function... With these combination microwaves, say goodbye to your daily frozen meals and cook real little feasts with perfect results.

Speed Defrost, for your last-minute menus!

To defrost your food up to 6 times faster, select the type of dish you wish to defrost and enter its weight. The microwave will automatically adjust the appropriate time to avoid overcooking. For example, it will only take 1min 40sec to defrost 4 hamburgers weighing 100g.



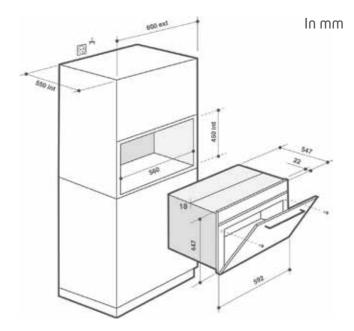

45cm 40 litres Microwaves scheme





Available model in FULL BLACK

BKC7153BB

In mm



Available models in BLACK and INOX





BMG2120B

BMG2120X

BMG2120W WHITE

- 25 litres
- Grill
- 3 cooking functions
- Electronic programming
- Touch sensitive
- Automatic cooking
- Speed Defrost
- Timer 95 minutes
- Maxi turntable 31.5cm removable
- Electronic child səfety
- Stainless steel cavity

BMG2115X INOX

25 litres

Grill 1,000W

Buttons & Knob Automatic cooking Speed Defrost ■ Timer 95 minutes

3 cooking functions

Electronic programming

Electronic child safety

Stainless steel cavity

Power 900W

■ Maxi turntable 31cm removable

■ Built-in dimensions (H x W x D mm): 380x560x550

Grill

- Power 900W
- Built-in dimensions (H x W x D mm): 380x560x550



More flavours in Grill mode

Opt for these microwaves with a high-powered grill to vary your menu and add a little crunch to your

The **maxi turntable** can accommodate large plates. Its disengageable function stops the tray from rotating so that you can place large square dishes, for example.



daily meals.

A sense of comfort

600-560+8 380+2 (45)--



Available model in BLACK

BMG2115B

38cm 25 litres Microwaves scheme

BMG2112B BLACK

3 cooking functions

Automatic cooking

■ Timer 95 minutes

Electronic child safety

■ Stainless steel cavity

Speed Defrost

Power 900W

Electronic programming Buttons & Knob

■ Maxi turntable 31cm removable

■ Built-in dimensions (H x W x D mm): 380x560x550

25 litres

Grill Grill 1000W



BMG2508B BLACK

- 20 litres
- Grill
- Grill 1,000W
- Electronic programming
- knob
- Automatic cooking
- Speed Defrost
- Timer 95 minutes
- Maxi turntable 24cm removable
- Electronic child safety
- Stainless steel cavity
- Power 1,250W
- Built-in dimensions (H x W x D mm): 380x560x550



Available model in BLACK



BMS7112B



BMS7112X INOX

- 26 litres
- Solo
- Electronic programming
- Touch sensitive
- Automatic cooking
- Speed Defrost
- Timer 60 minutes
- Maxi turntable 30cm removable
- Electronic child səfety
- Stainless steel cavity
- Power 900W
- Built-in dimensions (H x W x D mm): 380x560x550




Stainless steel cavity

This material is the benchmark for food hygiene. In addition, stainless steel also reflects light, which makes food more visible.

Easy installation

This 26-litre microwave (BMG2508B) slips easily into a 38 cm niche to fit perfectly into the kitchen. on top of


BMG2508B scheme



Cook with simplicity and confidence!

Thanks to the Timer function, you can heat, defrost or cook with greater precision by programming the time from 1 to 60 minutes.

BMS7112X/B scheme

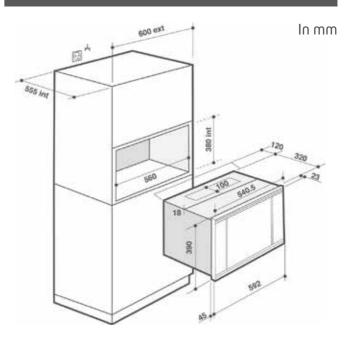

your column oven.



Available models in BLACK and WHITE









BMS7120W

BMS7120X INOX

- 26 litres Solo
- Electronic programming
- Touch sensitive
- Automatic cooking
- Quattro system
- Speed Defrost
- Timer 60 minutes
- Maxi turntable 30cm removable
- Electronic child safety
- Stainless steel cavity
- Power 900W
- Built-in dimensions (H x W x D mm): 380x560x550



BMS5112X BLACK

- 17 litres
- Solo
- Electronic programming
- Buttons & Knob
- Speed Defrost
- Timer 95 minutes
- Maxi turntable 24.5 cm removable
- Electronic child safety
- Stainless steel cavity
- Power 800 W
- Built-in dimensions (H x W x D mm): 380x560x310



BMS6112X INOX

- 17 litres
- Solo
- Electronic programming
- Buttons & Knob
- Automatic cooking
- Speed Defrost
- Timer 95 minutes
- Maxi turntable 24.5 cm removable
- Electronic child safety
- Stainless steel cavity
- Power 800 W
- Built-in dimensions (H x W x D mm): 380x560x300

Insurance of a perfect result

• Quatro System

provide optimal distribution of microwaves inside the cavity. The result: your dishes are uniformly defrosted, cooked or reheated.

Automatic cooking

Just select the type of food among the 8 proposed and input the weight. The microwave then automatically suggests the appropriate cooking mode and time.


In mm

BMS7120X/B/W scheme

Electronic Child safety

This control lock button is ideal for adventurous children or for cleaning the control panel with a quick wipe down without accidentally switching it on.

BMS6112X & BMS5112X scheme





Leading-edge expertise 100% French manufacturing

As a pioneer and expert in induction, Brandt is developing a new collection of hobs that are ever more stylish, functional and efficient.

The range has been extended to include 80 and 60 cm models, with a host of refined configurations based on a refined full-glass design and touch-sensitive controls dedicated to each cooking zone. Equipped with high-performance inductors, they combine unrivalled flexibility, heating power and modularity for infinite possibilities of use.



Flexibility and performance

HoriZone and DuoZone: extraordinary cooking areas


What sets them apart is their ability to provide a modular space with one or two separate, autonomous zones. With a surface area of **40x23 cm for horiZone** and **37x18 cm for Duozone**, they can be used to position a large oval casserole or a fish pan, or two conventional-sized utensils at the front and rear, either alone or simultaneously, by adjusting the power levels to suit each type of preparation.





10 safety features pack induction

Brandt induction hobs are perfectly safe and have all the required safety features to cook with total peace of mind. This pack includes Residual heat indicator, Small object detection, Protection against overflows, Auto-Stop system, Panel lock control, Automatic saucepan detection, Anti-overheating cookware, Low voltage, connection error and over tension detections + Cleaning clean Lock function.

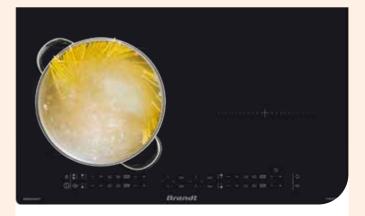


Innovative direct access functions

For faster, better-quality cooking:

- **Ultraboost:** heats up the fireplace up to 20% faster than a conventional boost function.
- Boil: boil up to 6 litres of water without overflowing and without worrying about time or cooking. The hob takes care of everything for you: just set the quantity of water and confirm.

Well-controlled cooking areas

- EasyCook: (Eco badge) identifies the ideal cooking zone according to the diameter of the pan. It helps you to reach the set temperature more quickly, thus saving energy.
- **Recall:** Stores programmed settings (power and timer) so that you can retrieve them after an unexpected power outage of the cooking zone.

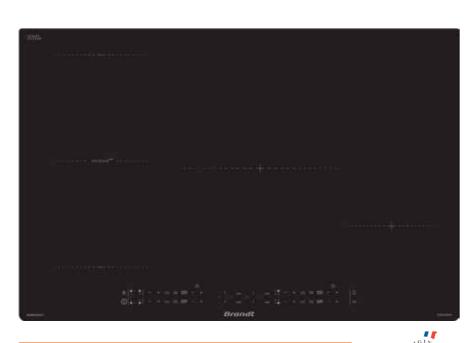

Free zone, an unlimited number of combinations

The advantage of horiZone is to allow multiple confi gurations to cook to suit your desires without constraints. Flexible and precise with adjustable direct access and lot of power levels, our free zone also offers a large capacity heaters with a maximum power of 4,000W for horiZone, 3,600W for duozone.





ONLY ONE LARGE ZONE FOR:

Several small cookware





2 INDEPENDENT COOKING ZONES:


Baking the front, rear or on both simultaneously with different powers


BPI384HUB BLACK

- 80cm
- Touch-sensitive buttons
- 4 induction cooking zones : Left freezone horiZone 40 x 23cm -3.750kW Center 28cm - 3.750kW Front right 16cm - 2.5kW
- Total Power 7.4kW
- 10 Cooking positions
- 3 Boosters
- Ultraboost
- 4 timers 1 to 99 minutes
- Direct access: Ultraboost -Boil Function - Clean lock - Recall
- Pack 10 safeties: Antioverheating, Touchpad lock, Auto-stop, Anti-spill, Residual heat indicators, Cookware detection, Little utensils detection, Low voltage detection, Bad connection detection, Over voltage detection
- Built-in WxD (mm): 750X495

80 cm of induction space: the dimension of talent

Brandt is listening to its demanding consumers when it comes to design and functionality, and now presents its new wide induction hob, the latest addition to the Brandt collection. With its sleeker design, touch-sensitive controls dedicated to each cooking zone, and innovative direct-access functions for greater speed, precision and efficiency, this induction hob is an invitation to conviviality and has everything you need to prepare a delicious feast!

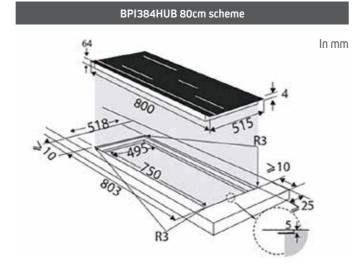




BPI364HSB BLACK

- 60cm
- Touch-sensitive buttons
- 4 induction cooking zones : Left freezone horiZone 40 x 23cm - 3.750kW Rear right 21cm - 3.6kW Front right 16cm - 2.5kW
- Total Power 7.4kW
- 14 Cooking positions
- 3 Boosters
- Ultraboost
- 3 timers 1 to 99 minutes
- Direct access: Piano function Clean lock
- Pack 10 safeties: Antioverheating, Touchpad lock, Auto-stop, Anti-spill, Residual heat indicators, Cookware detection, Little utensils detection, Low voltage detection, Bad connection detection, Over voltage detection
- Built-in WxD (mm): 560X490

BPI164HSW WHITE



- Touch-sensitive buttons
- 4 induction cooking zones : Left freezone horiZone 40 x 23cm - 4kW Rear right 21cm - 3.6kW Front right 16cm - 2.5kW
- Total Power 7.4kW
- 14 Cooking positions
- 3 Boosters
- Ultraboost
- 3 timers 1 to 99 minutes
- Direct access: Piano function-clean lock
- Pack 10 safeties: Antioverheating, Touchpad lock, Auto-stop, Anti-spill, Residual heat indicators, Cookware detection, Little utensils detection, Low voltage detection, Bad connection detection, Over voltage detection
- Built-in WxD (mm): 560X490

Piano function

This dedicated pre-programmed feature divides the horiZone area into two separate zones. For example, the front zone can be used to sear food and then keep the pan warm by sliding it onto the rear zone..

60cm Induction Hobs scheme In mm



| 36 37|



BPI264DB BLACK

- 60cm
- Slider control
- 4 induction cooking zones:
 Right freezone duoZone 37 x 18cm 3.6kW
 Rear left 21cm 2.6kW
 Front left 16cm 1.5kW
- Total Power 7.4kW
- 10 Cooking positions
- Clean lock
- 4 Boosters
- 3 timers 1 to 99 minutes
- Pack 10 safeties: Antioverheating, Touchpad lock, Auto-stop, Anti-spill, Residual heat indicators, Cookware detection, Little utensils detection, Low voltage detection, Bad connection detection, Over voltage detection
- Built-in WxD (mm) : 560X490



BPI364DPW WHITE

- 60cm
- Touch-sensitive buttons
- 4 induction cooking zones:
 Left freezone duoZone 37 x 18cm
 3.750kW
 Rear right 21cm 3.6kW
- Front right 16cm 2.5kW

 Total Power 7.4kW
- 14 Cooking positions
- 3 Boosters
- Ultraboost
- 3 timers 1 to 99 minutes
- Direct access: Boil function Clean lock
- Pack 10 safeties: Antioverheating, Touchpad lock, Auto-stop, Anti-spill, Residual heat indicators, Cookware detection, Little utensils detection, Low voltage detection, Bad connection detection, Over voltage detection
- Built-in WxD (mm) : 560X490

FRANCE®

Available model in BLACK



BPI364DPB

• **Residual heat indicator** to prevent you from touching areas that are still hot (after intensive use)


- Small object detection which protects from heating up a small object (spoon, ring, etc.)
- Protection against overflows, which automatically shuts off the hob.

10 safety pack induction features

- **Auto-Stop system:** if a dish is left to cook for a prolonged period of time, the hob switches off by itself.
- Panel lock control that can be turned on when the hob is shut off or during cooking.
- Automatic saucepan detection.
- **Anti-overheating cookware:** this patented, exclusive safety system limits the temperature under the cooking zone to 300°C. It regulates the heat of a piece of empty cookware so as not to damage it. For example, it prevents all risk of self-ignition of oil.
- Low voltage, connection error and over tension detections.

Ultraboost

Save time bringing water to the boil by concentrating the duoZone's maximum power on just one of these two burners.



BPI6428UB BLACK

- 60cm
- Touch-sensitive buttons
- 4 induction cooking zones: Left freezone duoZone 37 x 18cm – 3.6kW Rear right 21cm – 3.1kW Front right 16cm – 2kW
- Total Power 7.2kW
- 10 Cooking positions
- 3 Boosters
- Clean lock
- Ultraboost
- 3 timers 1 to 99 minutes
- Pack 10 safeties: Antioverheating, Touchpad lock, Auto-stop, Anti-spill, Residual heat indicators, Cookware detection, Little utensils detection, Low voltage detection, Bad connection detection, Over voltage detection
- Built-in WxD (mm) : 560X490

FRANCE® FRANCE

BPI6427B BLACK

- 60cm
- Touch-sensitive buttons
- 4 induction cooking zones:
 Left freezone duoZone 37 x 18cm 3.6kW
 Rear right 21cm 3.1kW
 Front right 16cm 2kW
- Total Power 7.2kW
- 10 Cooking positions
- 3 Boosters
- Clean lock Recall
- 3 timers 1 to 99 minutes
- Pack 10 safeties: Antioverheating, Touchpad lock, Auto-stop, Anti-spill, Residual heat indicators, Cookware detection, Little utensils detection, Low voltage detection, Bad connection detection, Over voltage detection
- Built-in WxD (mm): 560X490




DuoZone

Duozone can offer to left of the hob a modular cooking space of one only or two distinct and independent zones. With this space of 37x18cm, we can put a large oval cocotte, a fish kettle or two standard size cookware at the front and rear.


Booster

This function enables direct and instantaneous access to the cooking zone's highest power. Its use is unlimited in time. The cooking time is entirely up to you!

60cm Induction Hobs scheme

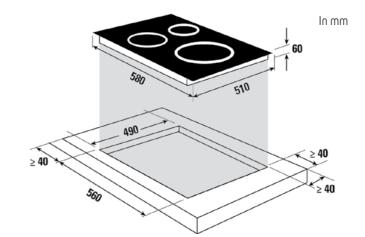


|38|

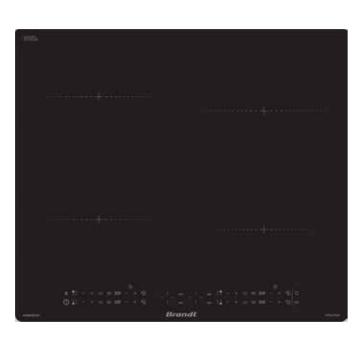

BPI3641SB BLACK

- 60cm
- Touch-sensitive buttons
- 4 induction cooking zones: Rear left 18cm – 3.6kW Front left 18cm – 3.6kW Rear right 21cm – 3.6kW Front right 16cm – 2.5kW
- Total Power 7.4 kw
- 14 Cooking positions
- 4 Boosters
- Ultraboost
- Recall, Clean lock, Boil function
- 4 timers 1 to 99 minutes
- Direct access : Clean lock
- Pack 10 safeties: Antioverheating, Touchpad lock, Auto-stop, Anti-spill, Residual heat indicators, Cookware detection, Little utensils detection, Low voltage detection, Bad connection detection, Over voltage detection
- Built-in WxD (mm) : 560X490






BPI365HSW WHITE

- 60cm
- Touch-sensitive buttons
- 4 induction cooking zones:
 Left freezone horiZone 40 x 23cm 3.75kW
 Rear right 21cm 3.6kW
 Front right 16cm 2.5kW
- Total Power 7.4kW
- 14 Cooking positions
- 3 Boosters
- Ultraboost
- 3 timers 1 to 99 minutes
- Direct access : Boil Clean lock Grill function
- Pack 10 safeties: Antioverheating, Touchpad lock, Auto-stop, Anti-spill, Residual heat indicators, Cookware detection, Little utensils detection, Low voltage detection, Bad connection detection, Over voltage detection
- Built-in WxD (mm): 560X490

Recall function / Automatic saucepan detection

Your hob automatically detects the presence of a saucepan and identifies its position. Any change of position on the hob is indicated and displayed on the control panel. The settings you assigned to the initial hob (power, timer) are automatically transferred to the new hob.

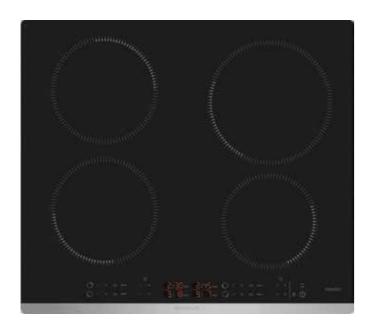

BPI6440X INOX


- 60cm
- Touch-sensitive buttons
- 4 induction cooking zones: Rear left 18cm – 2.8kW Front left 18cm – 2.8kW Rear right 21cm – 3.1kW Front right 16cm – 2kW
- Total Power 7.2 kw
- 10 Cooking positions
- 4 Boosters
- Recall Clean lock
- 4 timers 1 to 99 minutes
- Direct access : Timer Mijotage Boost
- Pack 10 safeties: Antioverheating, Touchpad lock, Auto-stop, Anti-spill, Residual heat indicators, Cookware detection, Little utensils detection, Low voltage detection, Bad connection detection, Over voltage detection
- Built-in WxD (mm) : 560X490

Grill function


This semi-automatic function, accessible directly from the keypad, gives you the best settings for grilling like a chef without the risk of burns.



60cm Induction Hobs scheme

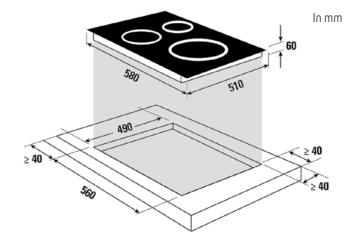





BPI3641PB BLACK

- 60cm
- Touch-sensitive buttons
- 4 induction cooking zones : Rear left 18cm - 3.6kW Front left 18cm - 3.6kW Rear right 21cm - 3.6kW Front right 16cm - 2.5kW
- Total Power 7.4kW
- 14 Cooking positions
- 4 Boosters
- Ultraboost
- 4 timers 1 to 99 minutes
- Direct access: Recall Boil function Clean lock.
- Pack 10 safeties: Antioverheating, Touchpad lock, Auto-stop, Anti-spill, Residual heat indicators, Cookware detection, Little utensils detection, Low voltage detection, Bad connection detection, Over voltage detection
- Built-in WxD (mm): 560X490



BPI6420B BLACK

- 60cm
- Touch-sensitive buttons
- 4 induction cooking zones : Rear left 18cm - 2.8kW Front left 18cm - 2.8kW Rear right 21cm - 3.1kW Front right 16cm - 2kW
- Total Power 7.2kW
- 10 Cooking positions
- 4 Boosters
- Recall Clean lock
- 4 timers 1 to 99 minutes
- Pack 10 safeties: Antioverheating, Touchpad lock, Auto-stop, Anti-spill, Residual heat indicators, Cookware detection, Little utensils detection, Low voltage detection, Bad connection detection, Over voltage detection
- Built-in WxD (mm) : 560X490



For faster, better-quality cooking


Ultraboost lets you heat up the zone up to 20% faster than the classic Boost function.

BPI1641UB BLACK



■ Touch-sensitive buttons

- 4 induction cooking zones : Rear left 18cm - 3.6kW Front left 18cm - 3.6kW Rear right 21cm - 3.6kW Front right 16cm - 2.5kW
- Total Power 7.4kW
- 10 Cooking positions
- 4 Boosters
- Ultraboost
- 4 timers 1 to 99 minutes
- Direct access : Recall + Clean lock.
- Pack 10 safeties: Antioverheating, Touchpad lock, Auto-stop, Anti-spill, Residual heat indicators, Cookware detection, Little utensils detection, Low voltage detection, Bad connection detection, Over voltage detection
- Built-in WxD (mm): 560X490



BPI6420B Hob scheme

In mm



Flexibility, responsiveness and precision

- Self-adjusting hobs. The heating surface of the induction hobs adapts automatically to the diameter of your cooking utensils, so no energy is wasted.
- Each household has its own dedicated controls and timer for faster, more precise cooking.
- 10 cooking settings, from the gentlest to the liveliest, for keeping warm, simmering or searing, and a Booster button for instant maximum power!









BPI6464B BLACK

- 60cm
- Touch-sensitive buttons
- 4 induction cooking zones: Rear left 18cm – 2.4kW Front left 18cm – 2.4kW Rear right 21cm – 2.4kW Front right 16cm – 2.2kW
- Total Power 7.2kW
- 10 Cooking positions
- 4 Boosters
- Clean lock
- 4 timers 1 to 99 minutes
- Pack 10 safeties: Antioverheating, Touchpad lock, Auto-stop, Anti-spill, Residual heat indicators, Cookware detection, Little utensils detection, Low voltage detection, Bad connection detection, Over voltage detection
- Built-in WxD (mm): 560X490



BPI2641B BLACK

- 60cm
- Touch-sensitive buttons
- 4 induction cooking zones: Rear left 21cm - 2.3kW Front left 16cm - 1.5kW Rear right 18cm - 1.8kW Front right 18cm - 1.8kW
- Total Power 7.2 kw
- 10 Cooking positions
- Clean lock
- 4 Boosters
- 4 timers 1 to 99 minutes
- Pack 10 safeties: Antioverheating, Touchpad lock, Auto-stop, Anti-spill, Residual heat indicators, Cookware detection, Little utensils detection, Low voltage detection, Bad connection detection, Over voltage detection
- Built-in WxD (mm) : 560X490



BPI2638UB BLACK

- 60cm
- Touch-sensitive buttons
- 3 induction cooking zones:
 Rear left 16cm 2.5kW
 Front left 21cm 3.6kW
 Centre right 28cm 3.7kW
- Total Power 7.4kW
- 10 Cooking positions
- 3 Boosters
- Clean lock
- Ultraboost
- 3 timers 1 to 99 minutes
- Pack 10 safeties: Antioverheating, Touchpad lock, Auto-stop, Anti-spill, Residual heat indicators, Cookware detection, Little utensils detection, Low voltage detection, Bad connection detection, Over voltage detection
- Built-in WxD (mm): 560X490




BPI6362B BLACK




- Touch-sensitive buttons
- 3 induction cooking zones: Centre left 26cm - 2.4kW Rear right 16cm - 2.2kW Front right 18cm - 2.4kW
- Total Power 5.9kW
- 10 Cooking positions
- 3 Boosters
- Clean lock
- 3 timers 1 to 99 minutes
- Pack 10 safeties: Antioverheating, Touchpad lock, Auto-stop, Anti-spill, Residual heat indicators, Cookware detection, Little utensils detection, Low voltage detection, Bad connection detection, Over voltage detection
- Built-in WxD (mm) : 560X490


BPI6464B Hob scheme



BPI2641B Hob scheme




BPI2638UB Hob scheme



BPI6362B Hob scheme

65,5 65,5 A






BPI1621UB BLACK

- **30cm**
- Touch-sensitive buttons
- 2 induction cooking zones : Rear right 21cm – 3.6kW Front right 16cm – 2.5kW
- Total Power 3.7kW
- 10 cooking positions
- 2 Boosters
- Ultraboost
- 2 timers 1 to 99 minutes
- 5 Direct access
- Pack 10 safeties: Antioverheating, Touchpad lock, Auto-stop, Anti-spill, Residual heat indicators, Cookware detection, Little utensils detection, Low voltage detection, Bad connection detection, Over voltage detection
- Built-in WxD (mm): 265X490

The domino theory


Create the perfect pairing to enjoy the best of Brandt cooking by combining one of these induction dominoes with a glass gas domino!






BPI6210B BLACK

- 30cm
- Touch-sensitive buttons
- 2 induction cooking zones: Rear right 18cm – 2.8kW Front right 18cm – 2.8kW
- Total Power 3.6kW
- 10 cooking positions
- 2 Boosters
- 2 timers 1 to 99 minutes
- Pack 10 safeties: Antioverheating, Touchpad lock, Auto-stop, Anti-spill, Residual heat indicators, Cookware detection, Little utensils detection, Low voltage detection, Bad connection detection, Over voltage detection
- Built-in WxD (mm) : 265X490

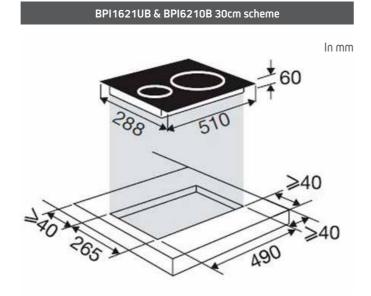





BPI6414BM BLACK

- 60cm
- Touch-sensitive buttons (induction)
- Ignition integrated into the knobs (gas)
- 2 induction cooking zones: Front right 18cm – 2.8kW Front left 18cm – 2.8kW
- Total power 3.4kW
- 9 cooking positions + Booster
- 2 Boosters
- 99 minutes timer affectable cooking area chosen
- Direct access: Booster
- Pack 10 safeties: Antioverheating, Touchpad lock, Autostop, Anti-spill, Residual heat indicators, Cookware detection, Little utensils detection, Low voltage detection, Bad connection detection, Over voltage detection,
- 2 gas cooking zones: Rear left very rapid – 3.1kW Rear right semi rapid – 1.5kW
- Total power 4.6kW
- 2 grates mono-zone in cast-iron
- Safety device with thermocouple
- Built-in WxD (mm): 560X490

For gas fans... and induction fans

A standard 16 Ampere plug is all you need to connect in this mixed hob and benefit from the advantages of gas and the recognised qualities of induction.


Design and performance

The refined, durable tempered glass surface features two induction zones at the front and two gas burners with single-fire cast-iron grates at the back for perfect stability!

10 pack induction safety and gas thermocouple

Total peace of mind in the kitchen!

BPI6414BM 60cm scheme

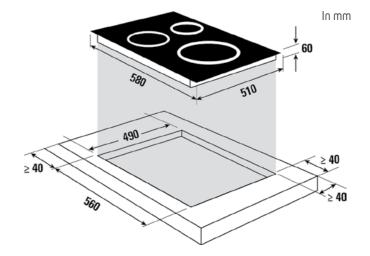



Robustness and eco-design

In the utmost respect for the environment

Taking into account the different stages in the product lifecycle, Brandt opted upstream to produce an ecoefficient product by using natural materials with the lowest impact on the environment and those that keep the planet as clean as possible in the manufacture of its ceramic glass. Schott Ceran® glass doesn't use any toxic metals or harmful chemical products.

Robust vitroceramic glass

This material has many advantages. It has high thermal resistance (up to 700°C), which allows it to bear thermal shocks. This glass is also particularly sturdy: it is not affected by chemical agents and doesn't dilate when heated, even under intense heat..



Aesthetic products

The Brandt vitroceramic hobs have an uncluttered area with 2, 3 or 4 cooking zones and which have a dedicated sensitive keyboard or some knobs to clearly identify the control panel.









Cooking in complete safety

Equipped with a keypad lock, residual heat indicator and auto-stop, vitroceramic hobs are safe and let you cook with complete peace of mind. Clean Lock function allows to temporarily locking appliance during cleaning. To activate Clean lock, the hob can be off or on. After a predefined time, the lock will be automatically canceled.




Alliance of efficiency and precision


Quicklight radiant zones: controlled quality cooking

These zones provide perfect heat distribution and are wellsuited for food that needs to be simmered for a long time. These smart cooking zones have safety limit switches that self-regulate automatically: they turn on and off to maintain the selected power level. The temperature thus remains uniform and appropriate for cooking your food. The regulation frequency varies according to the selected power level.


Speed and precision are required

Each heating zone is controlled either by touchsensitive controls, or by ergonomic knobs; 9 heat settings are clearly identified on the keypad

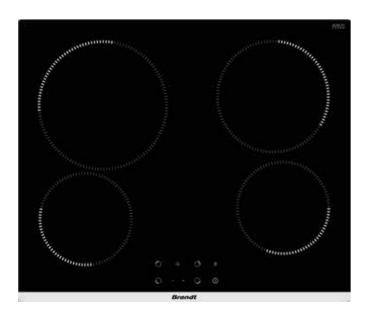





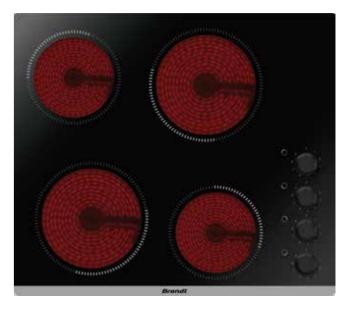

BPV1641B BLACK

- 60cm
- Touch-sensitive buttons
- 4 Quicklight radiant zones: Rear left 21cm - 2.1kW Front left 14.5cm - 1.2kW Rear right 18cm - 1.8kW Front right 14.5cm - 1.2kW
- Total Power 6.3kW
- 9 Cooking positions
- 4 timers 1 to 99 minutes
- Built-in WxD (mm): 560X490

BPV2421B BLACK

- 60cm
- Touch-sensitive buttons
- 4 Quicklight radiant zones: Rear left 23cm – 2.2kW Front left 16.5cm – 1.2kW Rear right 20cm – 1.8kW Front right 16.5cm – 1.2kW
- Total Power 6.3kW
- 9 Cooking positions
- 4 timers 1 to 99 minutes
- Built-in WxD (mm) : 560X490

BPV6420B BLACK

- 60cm
- Touch-sensitive buttons
- 4 Quicklight radiant zones: Rear left 16.5cm - 1.2kW Front left 20cm - 1.8kW Rear right 20cm - 1.8kW Front right 16.5cm - 1.2kW
- Total Power 6kW
- 9 Cooking positions
- 4 timers 1 to 99 minutes
- Built-in WxD (mm): 560X490

BPV6410B BLACK


- 60cm
- Knobs
- 4 Quicklight radiant zones: Rear left 16.5cm - 1.2kW Front left 20cm - 1.8kW Rear right 20cm - 1.8kW Front right 16.5cm - 2kW
- Total Power 6kW
- 9 Cooking positions
- 4 timers 1 to 99 minutes
- Built-in WxD (mm) : 560X490


Speed and precision are required

Each heating zone is controlled either by touch-sensitive controls; **9 heat settings** are clearly identified on the keypad.

Minimise your cooking with confidence

You can program each hob to cook for **up to 99 minutes:** the hob switches off automatically at the end of the set time.

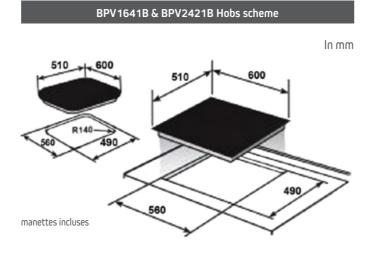

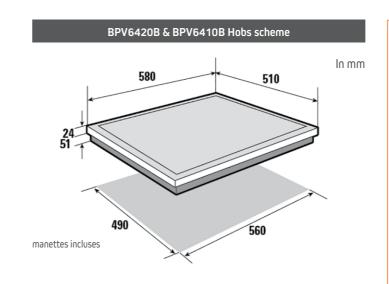

Residual heat indicator


The hob will display a clearly visible indicator with the "H" symbol to let you know that the surface temperature is still too high (over 50°C) and that it is dangerous to touch it.











BPV6320B BLACK

- 60cm
- Touch-sensitive buttons
- 3 Quicklight radiant zones: Rear left 16.5cm – 1.2kW Front left 20cm – 1.8kW Center right 23cm – 2.3kW
- Total Power 5.3kW
- 9 Cooking positions
- 3 timers 1 to 99 minutes
- Built-in WxD (mm): 560X490

BPV2320B BLACK

- 60cm
- Touch-sensitive buttons
- 3 Quicklight radiant zones:
 Rear left 16.5cm 1.2kW
 Front left 20cm 1.8kW
 Center right 23cm 2.1kW
- Total Power 5.1kW
- 9 Cooking positions
- 3 timers 1 to 99 minutes
- Built-in WxD (mm) : 560X490


BPV6210B BLACK

- **30cm**
- Knobs
- 2 Quicklight radiant zones: Rear right 16.5cm – 1.2kW Front right 20cm – 1.8kW
- Total Power 3kW
- 9 Cooking positions
- 2 timers 1 to 99 minutes
- Built-in WxD (mm): 268X490

BPV6222B BLACK

- 30cm
- Touch-sensitive buttons
- 2 Quicklight radiant zones: Rear right 16.5cm – 1.2kW Front right 20cm – 1.8kW
- Total Power 3kW
- 9 Cooking positions
- 2 timers 1 to 99 minutes
- Built-in WxD (mm) : 268X490

BPV6320B Hob scheme In mm 24 490 560

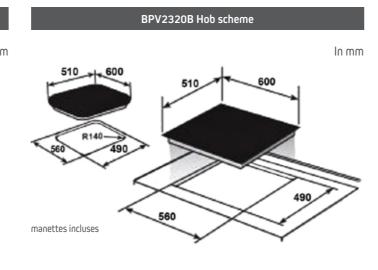


The domino theory!

Create a harmonious ensemble by combining them as you wish with a Brandt induction or gas cooker.

Design and eco-design

A refined surface with subtle screen prints, made from ceramic glass using natural materials. It's Brandt all the way!

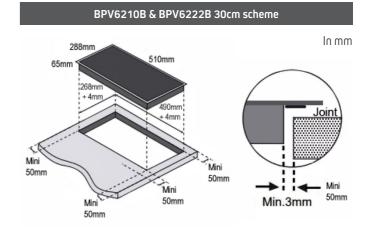



Brandt gas: timeless energy and design

Available in glass or stainless steel, in white or black enamel, Brandt offers a beautiful collection to give gas back its letters of nobility and match all kitchens.

The pure lines of Brandt's glass tables give the pleasure of cooking its original meaning: the elegantly shiny tempered glass withstands the most intense shocks. Their single-burner grates in cast iron, a noble material par excellence, ensure perfect stability for all your utensils, large or small.



Comfort and cooking quality

Power for every type of cooking

All the gas hobs have a different power rating for each burner size to suit your requirements, from the gentlest of mid-cooking on the 850 W auxiliary burner to the liveliest of cooking on the 3,100 W high-speed burner. The ergonomic controls are easy to grip, so you can program the intensity with precision.

Integrated electronic ignition

All it takes is one touch! Press the ignition button by turning the knob to the maximum position. Keep pressing until the burner lights up, then set the desired power.







Stamped pots burners

Burners can be cleaned effortlessly because they are stamped directly into the burner plates. Once the covers are removed, surface of the hob is a single piece without corners or an edge, and injectors are easily accessible.


To cook in total safety

Thermocouple: gaz safe

The entire range of Brandt hobs is equipped with a thermocouple safety unit, which guarantees you maximum peace of mind.

- Burners are controlled by a tap with a security system, which, if the flame goes out accidentally, gas supply is cut off quickly and automatically to stop gas from escaping and thereby preventing any risk of leakage
- The burner safety is a metal rod located directly to the side of the flame.
- Should the flame go out unexpectedly, the gas shuts off in less than 30 seconds.





Limiter of temperature

The electric hobs are just as safe thanks to a limiter: this safety feature indicated by a red dot on the heating zone prevents all overheating, which could cause damage to the burner.

HOBS

S






- 60cm mixed gas and electric
- Gas
- Ignition integrated into the knobs
- 3 cooking zones:
 Front left very-rapid 3.1kW
 Rear right rapid 2.25kW
 Front right auxiliary 0.85kW
- Total gas power 6.2kW
- 3 grates mono-zone in enamel
- Safety device with thermocouple
- Electric
- 1 cooking zone: Rear left 14.5cm – 1.5kW with limiter
- Total power 1.5kW
- Built-in WxD (mm) : 560X480





BPG3400BM BLACK

- 60cm mixed gas and electric
- Gas
- Ignition integrated into the knobs 3 cooking zones: Front left rapid – 2.8kW Rear right semi-rapid – 1.75kW Front right auxiliary – 1kW
- Total gas power 5.5kW
- 3 grates mono-zone in enamel
- Safety device with thermocouple
- Electric
- 1 cooking zone: Rear left 14.5cm – 1.5kW with limiter
- Total power 1.5kW
- Built-in WxD (mm) : 560X480

BPG3400BM Glass Hob scheme

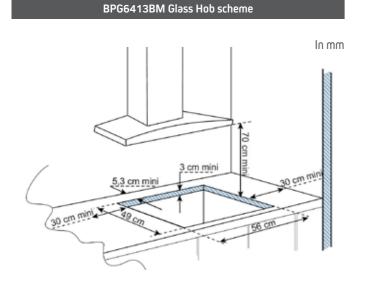





BPG6414B BLACK

- 60cm
- Ignition integrated into the Knob
- 4 gas cooking zones:
 Rear left semi-rapid 1.5kW
 Front left very-rapid 3.1kW
 Rear right rapid 2.25kW
 Front right auxiliary 0.85kW
- Total gas power 7.7kW
- 4 grates mono-zone in enamel
- Safety device with thermocouple
- Built-in WxD (mm): 560X480



BPG6413W WHITE

- 60cm
- Ignition integrated into the Knob
- 4 gas cooking zones: Rear left semi-rapid – 1.5kW Front left very-rapid – 3.1kW Rear right rapid – 2.25kW Front right auxiliary – 0.85kW
- Total gas power 7.7kW
- 4 grates mono-zone in enamel
- Safety device with thermocouple
- Built-in WxD (mm): 560X480




Available model in BLACK



BPG6413B

BPG6414B & BPG6413W/B Glass Hobs scheme



Design and functionality

The elegantly shiny glass surface is enhanced by single-fire grilles that are exceptionally stable!.

Thermocouple gas safety

All Brandt hobs are fitted with this system to prevent gas leaks in the event of the flame being accidentally extinguished. This system, consisting of a thermal fuse, a rotating dial and a metal safety rod located near each burner, automatically cuts off the gas supply in less than 30 seconds



BPG3200B BLACK

- **30cm**
- Ignition integrated into the Knob
- 2 gas cooking zones: Rear right rapid – 2.8kW Front right auxiliary – 1kW
- Total gas power 3.8kW
- 2 grates mono-zone in enamel
- Safety device with thermocouple
- Built-in WxD (mm): 270X490





FRANCE






BPE6410B BLACK

- 60cm
- Ignition integrated into the Knob
- 4 gas cooking zones: Rear left semi-rapid – 1.5kW Front left very-rapid – 3.15kW Rear right rapid - 2.3kW Front right auxiliary - 0.85kW
- Total gas power 7.8kW
- 2 enamelled grates
- Safety device with thermocouple
- Built-in WxD (mm): 560X490

The domino theory!

Here's a good compromise for those who want to try new energies, but don't want to do without gas. Combine this gas domino with a Brandt induction domino. Their sleek black glass designs combine perfectly to create a cooking area that is as attractive as it is efficient. It offers two burners, the largest of which has a combined power of 3600 W for lively cooking and convivial dishes

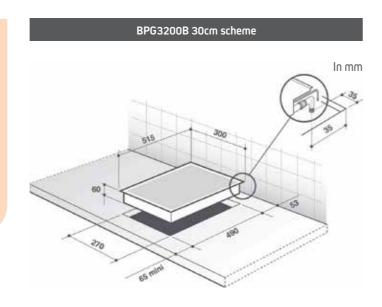


Perfectly controlled gas cooking!

Integrated electronic ignition

All it takes is one touch! Press the ignition button by turning the knob to the maximum position. Keep pressing until the burner lights up, then set the desired power.

Gas thermocouples: risk-free cooking pleasure

The burners are controlled by a valve fitted with a safety system which, if the flame is accidentally extinguished, quickly and automatically cuts off the gas supply to prevent any risk of leakage.

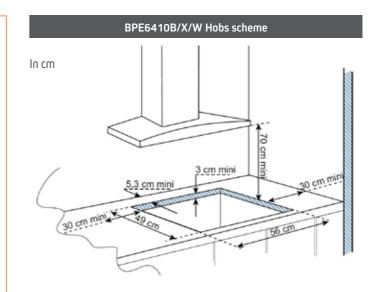



Available models in BLACK and WHITE




BPE3410B


BPE3410W

BPE3410X INOX

- 60cm
- Ignition integrated into the Knob
- 4 gas cooking zones: Rear left semi-rapid – 1.75kW Front left rapid – 2.8kW Rear right semi-rapid – 1.75kW Front right Auxiliary – 1kW
- Total gas power 7.3kW
- 2 enamelled grates
- Safety device with thermocouple
- Built-in WxD (mm) : 560X480



Available models in INOX and BLACK






BPE3411XM

BPE3411WM WHITE


- 60cm mixed gas and electric
- Ignition integrated into the knobs
- 3 cooking zones: Front left rapid – 2.8kW Rear right semi-rapid – 1.75kW Front right auxiliary – 1kW
- Total gas power 5.55kW
- 2 enamelled grids
- Safety device with thermocouple
- Electric
- 1 cooking zone: Rear left 14.5cm - 1.5kW with limiter
- Total power 1.5kW
- Built-in WxD (mm) : 560X480

Stamped pots burners

Burners can be cleaned effortlessly because they are stamped directly into the burner plates. Once the covers are removed, surface of the hob is a single piece without corners or an edge, and injectors are easily accessible.



BPE3410X/B/W Hobs scheme 500 580




Limiter of temperature

The electric hobs are just as safe thanks to a limiter: this safety feature indicated by a red dot on the heating zone prevents all overheating, which could cause damage to the burner.



BPE3411WM/XM/BM Hob scheme





A collection at the cutting edge of trends


Whatever the style and configuration of your kitchen, you're sure to find the perfect hood at Brandt. Combining their sometimes-atypical aesthetics with the utmost efficiency, all have been designed to fit elegantly and functionally into the trend for contemporary kitchens.

While the island and lamp hoods sublimate the function by emphasising the singularity of their shapes, others, such as the peripheral suction models, hide their filters behind their vertical glass front or, like the filtering units, can be integrated under a wall unit. The assertive lines of the decorative wall-mounted hoods, curved or boxed in stainless steel, are adorned with glass to match Brandt cooking appliances and shine in terms of Energy Labelling.



Delayed stop function

Available on models with peripheral extraction (BHV6801X a nd BHV1674IB), it allows you to programme the hood to switch off after a set period of time ranging from 10 to 90 minutes. Ideal for renewing the air in your room.



To effectively exhaust fumes and odours

These hoods have 3 or 4 speeds so you can change the suction power depending on the type of food you are cooking for efficient control. Equipped with extremely practical filter-cassettes and activated carbon filters, the hoods optimally filter grease and capture odours..



More comfort at the controls

To regulate light and airflow, let yourself be guided by the electronic control system with speed display, backlit buttons or touch-sensitive buttons! Comfort is guaranteed, while the purity of form is preserved.

The BHG2552B filter unit is also equipped with a remote control for lighting, start-up and suction speed adjustment.



LED lighting across the board

For greater respect for the environment and your well-being, Brandt has decided to equip all its models with LED lighting, which is more energy-efficient (using 85% less electricity) and lasts 20 times longer than incandescent bulbs.

A dimmer switch (depending on the model) allows the light to be adjusted to three levels to suit the ambience of your room



BHY2353B BLACK

- **38cm**
- 1 motor et 1 fan
- 4 speeds
- Electronic controls with backlit buttons
- Independent light: LED 4X1W
- Mood lighting
- Max flow rate in recycling: in normal operation: 255 m3/h
- Noise level in extraction: mini 43dB(A) / maxi 63dB(A)
- Energy efficiency class: A+
- 1 washable stainless steel grease filter
- Carbon filters supplied: FWK228
- No-return valve
- Installation only recycling



BHI2353G BLACK

■ 38cm

In mm

- 1 motor et 1 fan
- 4 speeds
- Electronic controls with backlit buttons
- Independent light: LED 4X1W
- Mood lighting
- Max flow rate in recycling: in normal operation: 290 m3/h
- Noise level in extraction: mini 45dB(A) / maxi 68dB(A)
- Energy efficiency class: A+
- 1 stainless steel filter-cassette washable in dishwasher
- Carbon filters supplied: FWK228
- Installation only recycling



BHI1043X INOX

- **49cm**
- 1 motor et 1 fan
- 3 speeds
- Electronic controls with backlit buttons
- Light: LED 2x2.5W
- Mood lighting
- Max flow rate in recycling: in normal operation: 550 m3/h
- Noise level in extraction: mini 45dB(A) / maxi 68dB(A)
- Energy efficiency class: B
- 1 washable stainless steel grease filter
- Carbon filters supplied: AFC-31
- Installation only recycling

in the room.


Sublimate the function!

Elegant, functional, and efficient....


- The BHY2353B hood features the black tubular shape so popular with decorating enthusiasts and discreet soft-touch controls. Among its many benefits, it has a Timer function for programming the hood to switch off up to 90 minutes after it has been used, and to renew the air
- The BHI2353G hood's aesthetics demonstrate its dual function: to extract air and to illuminate your kitchen space. To enhance its efficiency, its 4th Boost speed increases suction power tenfold for 5 minutes before automatically reverting to speed 3.
- As for the BHI1043X lamp hood, it can be installed as a full-fledged island hood, but can also be wallmounted using a sturdy stainless-steel bracket supplied with the appliance.

Energy labelling


The new energy label sticker gives more information and allows to better assess the performances about :

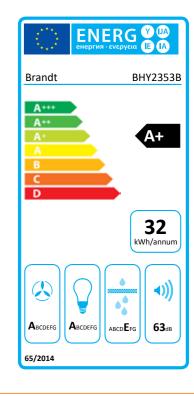


BHY2353B 38cm scheme



BHI2353G 38cm scheme



In mm





BHV2673XB BLACK

■ Sensitive electronic controls with backlit buttons

mini 44dB(A) / maxi 52dB(A) / Boost: 70dB(A)

■ 60cm

4 speeds

■ 1 motor et 1 fan

Light: LED 2x2.5 W

Maximum airflow in extraction:

in Booster mode: 740m3/h

■ Noise level in extraction:

Energy efficiency class: A+

■ No-return valve

in normal operation: 330 m3/h

2 washable aluminium grease filters

■ Carbon filters supplied: FWND-185

and a second sec

BHV6801X INOX

- 80cm
- 1 motor and 1 fan
- 3 speeds
- Delayed stop
- Electronic controls with backlit buttons
- Independent light LED 2x1.5W
- Maximum airflow in extraction: in normal operation 308m3/h
- in normal operation 308m3/h in Booster mode: 726m3/h
- Sound level in extraction: mini 48dB(A) / maxi 56dB(A) / Boost: 74dB(A)
- Energy efficiency class: A
- 1 washable aluminium grease filter
- Carbon filters supplied: FWAS
- In option: stainless steel chimney extension ATC-254X

BHV1974IB BLACK

- 90cm
- 1 motor and 1 fan
- 3 speeds
- Electronic controls with display

Design and performance

The original, refined all-glass structure of the BHV1974IB hood conceals its grease filters without compromising

efficiency. Its A+ energy label is proof of this.


- Independent light LED 2x1.5W
- Maximum airflow in extraction: in normal operation 373m3/h
- Sound level in extraction: mini 42dB(A) / maxi 57dB(A)
- Energy efficiency class: A+
- 1 aluminium grease filter
- Carbon filters supplied: FWND-185
- In option: stainless steel chimney extension ATC-252X

Peripheral extraction more efficient!


This extraction system ensures an optimum balance between suction effectiveness and noise level.

These original hoods concentrate their extraction area in the edges, generating a throttle in the airflow extraction without increasing the noise level, so they are innovative and efficient at the same time, giving to your kitchen a plus in design with optimal air suction results.


BHV2673XB 60cm scheme



BHV6801X 80cm scheme

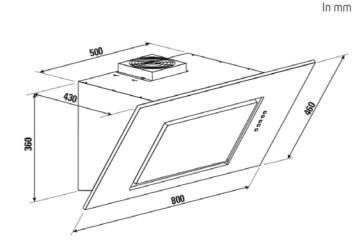

BHV1974IB 90cm scheme

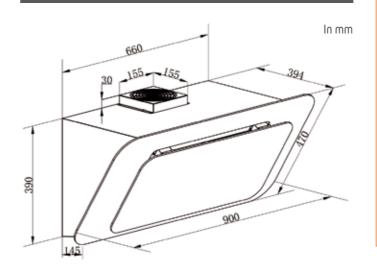

LED lighting: the best choice for Brandt!

More efficient than halogen lighting and lasting up to twenty times longer than incandescent bulbs, "Light Emitting Diode" lighting saves 85% in energy costs while maintaining optimum light intensity.:

|66 |



BHV1674IB BLACK

- 60cm
- 1 motor and 1 fan
- 3 speeds
- Delayed stop
- Electronic controls with display
- Independent light LED 2x1.5W
- Maximum airflow in extraction: in normal operation 345m3/h
- Sound level in extraction: mini 41dB(A) / maxi 56dB(A)
- Energy efficiency class: A
- 1 aluminium grease filter
- Carbon filters supplied: **CF115**
- No-return valve
- In option: stainless steel chimney extension ATC-252X

BHV1674IB 60cm scheme

Electronic controls with display

Light and airflow are precisely controlled at the touch of a finger on the glass touch-sensitive knob. Comfort is guaranteed, while the purity of the glass lines is preserved.

Delayed stop

This function allows you to programme the hood to switch off after a set period of time ranging from 10 to 90 minutes. You can also simply use it to renew the air in your room.

Aluminium filters: don't let anything through!

The 2 or 3 cassette filters on these hoods can be easily removed and placed in your dishwasher to maintain their full efficiency.



AD1046X

- 60cm
- 1 motor and 2 fans
- 3 speeds
- Mechanical controls with buttons

INOX


- Independent light LED 2x3W
- Maximum airflow in extraction: in normal operation 603m3/h
- Sound level in extraction: mini 42dB(A) / maxi 64dB(A)
- Energy efficiency class: C
- 2 aluminium grease filters
- Carbon filters supplied: AFC-29
- Deflector and no-return valve

Suction

Great aspiration! brandt hoods are delivered with full equipment for perfect extraction or recycling installation.

Extraction

 Extraction installation is an ideal solution because intake air with odours, steam and smoke is pulled in and quickly dispatched towards the exterior.
 Connect your hood to an exterior outlet to evacuate steam that first goes through a grease filter.




 For fl awless installation, Brandt hoods are equipped with a non-return valve, which is an essential accessory so that the wind cannot push the evacuated air back into your kitchen.




Recycling

 If you are unable to evacuate air to the outside, a recycling installation re-circulates purified air and rids it of its odours with a carbon filter..



 For optimum performance, the hoods have a defl ector, an essential accessory for re-circulating air through the vents.



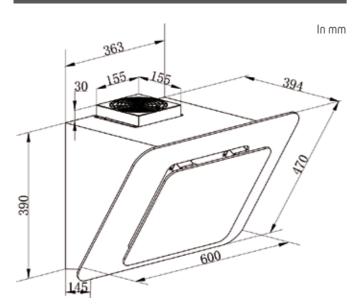

|68|



AAAAA

BHB6902X INOX

- **9**0cm
- 1 motor and 1 fan
- 3 speeds
- Mechanical controls with buttons
- Independent light LED 2x3W
- Maximum airflow in extraction: in normal operation 606m3/h
- Sound level:
- Mini 59dB(A) / Maxi 70dB(A)
- Energy efficiency class: B
- 2 metal filter-cassettes
- Carbon filters supplied: FWAS
- Deflector and no-return valve
- In option: Inox chimney extension ATC-250X

BHB6602X INOX

- 1 motor and 1 fan
- 3 speeds


- Maximum airflow in extraction: in normal operation 593m3/h
- Sound level:
 - Mini 58dB(A) / Maxi 68dB(A)
- Energy efficiency class: B
- 2 metal filter-cassettes
- Carbon filters supplied: FWAS
- Deflector and no-return valve
- In option:

Inox chimney extension ATC-250X

■ 60cm

- Mechanical controls with buttons
- Independent light LED 2x2W

BHB6902X 90cm scheme In mm



BHB6602X 60cm scheme

BOX 90CM-60CM Plug and Play system, Exclusive to Brandt

Only one person is needed to install the Box BHB6902X or BHB6602X hood. And three stages.








AD1516X INOX

- 60cm
- 1 motor and 1 fan
- 3 speeds
- Mechanical controls with buttons
- Independent light 2 LED 2x2W
- Maximum airflow in extraction: in normal operation: 614m3/h
- Sound levels:
 - Mini 64dB(A) / Maxi 70dB(A)
- Energy efficiency class: B
- 2 metal filter-cassettes
- Carbon filters supplied: FWAS
- Deflector and no-return valve
- In option:

Inox chimney extension ATC-250X



AD1516X 60cm scheme

.....

Design and functionality for this Box AD1516X hood

LED lighting

combines two advantages: low energy consumption and optimum brightness to illuminate the hob.

Charcoal filters

Supplied with the appliance, they allow installation in recirculation mode and purify the air in your kitchen.



BHG2552B BLACK

- 54cm
- 1 motor and 1 fan
- 3 speeds
- Remote control
- Electronic controls with display
- Independent light LED 2x4W
- Maximum airflow in extraction: in normal operation 430m3/h
- Sound level in extraction: mini 51dB(A) / maxi 57dB(A)
- Energy efficiency class: B
- 2 aluminium grease filters
- Carbon filters supplied: FWND-185
- No-return valve



BHG1522X INOX

- 52cm
- 1 motor and 1 fan
- 3 speeds
- Mechanical controls with slider
- Independent light LED 2x4W
- Maximum airflow in extraction: in normal operation 390m3/h
- Sound level in extraction: mini 54dB(A) / maxi 70dB(A)
- Energy efficiency class: C
- 2 aluminium grease filters
- Reference of recycling kit: AH6501
- No-return valve





An ingenious and luminous design!

This wall-mounted filter unit is a talented combination of function, style and performance.

When it comes to regulating airflow and lighting, let yourself be guided by the electronic control system with REMOTE CONTROL! Its remote control allows you to modulate and control the extraction and lighting functions remotely.

The two central LED strips ensure optimum brightness on the worktop and throughout the room.

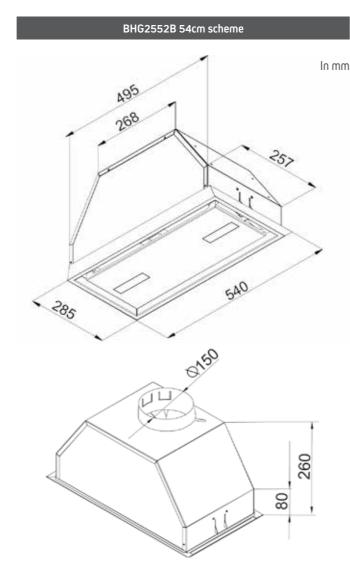

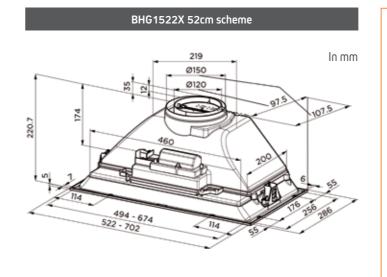




For efficient removal of odours and smoke

The 3 speeds allow you to modulate the suction power according to the nature of your dishes. Fitted with 2 aluminium cassette filters and activated charcoal filters for use in recycle mode, this hood ensures optimum grease filtering and odour capture. To maintain this efficiency, remember to clean the cassette filters regularly. They can be put in the dishwasher. As for the active charcoal filters, they can easily be replaced if grease becomes extremely saturated.



AT1349X INOX

- 90cm
- 1 motor and 1 fan
- 3 speeds
- Mechanical controls with buttons
- Independent light LED 2x3W
- Maximum airflow in extraction: in normal operation 384m3/h
- Sound level in extraction: mini 60dB(A) / maxi 71dB(A)
- Energy efficiency class: D
- 2 aluminium filter-cassettes washable in dishwasher
- Reference of recycling kit: AFC-36

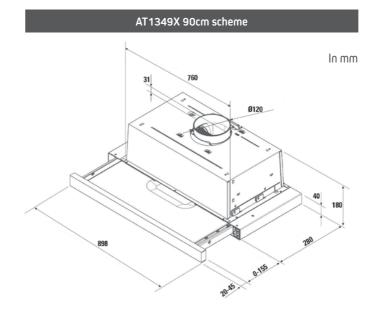

Perfectly discreet!

These telescopic cooker hoods, available in 90 cm or 60 cm widths, are unique in that they can be installed under a wall unit. Their controls are elegantly concealed behind a drawer panel that you simply pull towards you to switch it on.


Electronic touch-sensitive controls

With the touch of a finger, you can trigger ignition and regulate the airflow. Its self-compensating closing system ensures smooth, jolt-free operation.



AT1346X INOX

- 60cm
- 1 motor and 1 fan
- 3 speeds
- Mechanical controls with buttons
- Independent light LED 2x3W
- Maximum airflow in extraction: in normal operation 384m3/h
- Sound level in extraction: mini 60dB(A) / maxi 71dB(A)
- Energy efficiency class: D
- 2 aluminium grease filters
- Reference of recycling kit: AFC-36
- No-return valve

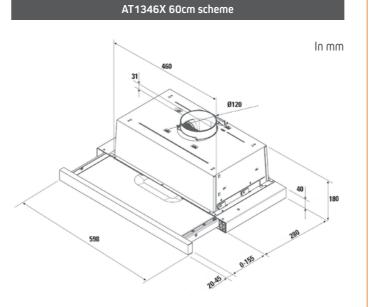

For greater efficiency of the hood, the quality of its use is essential


You must follow some rules to obtain a complete satisfaction of your hood for any cooking.


- Turn on the hood before the start of cooking.
- Do not open the windows to air currents.
- Let the hood run for 5 to 10 minutes after cooking.
- Adjust the flow according to the cooking and of the presence of grill or fryer.
- Clean the grease filters.
- Change the carbon filter regularly (in the case of a recycling installation).



BHT2611B BLACK

- 60cm
- 1 motor and 1 fan
- 3 speeds
- Sensitive electronic controls
- Independent light LED 2x1.7W
- Maximum airflow in extraction: in normal operation 405m3/h
- Sound level in extraction: mini 51dB(A) / maxi 59dB(A)
- Energy efficiency class: C
- 2 aluminium grease filters
- Carbon filters supplied: FWND-185
- No-return valve

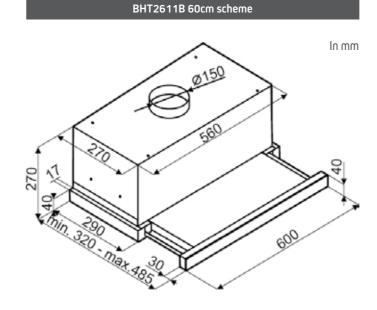

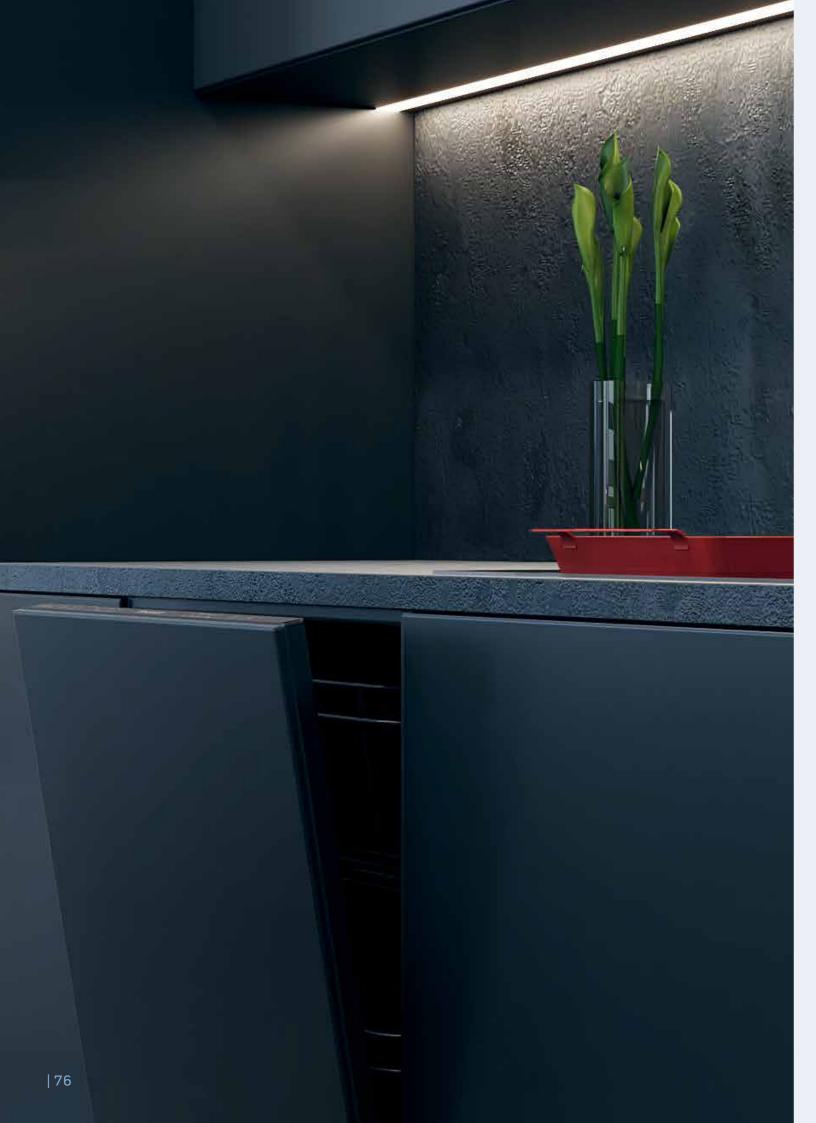

Brandt dishwashers The other centrepiece of your kitchen...

Brandt is sure to have the model best suited to your expectations. Available in 45 or 60 cm, with 10, 12, 13 or 14 place settings, they all come with decorative doors that match the kitchen units to create the perfect harmony.



To match efficiency and economy

Three of the programmes on offer stand out:

- Half load option. Don't wait until your dishwasher is completely full. Load the dishes onto one of the two baskets only and select one of the "Upper basket" or "Lower basket" buttons.
- The Auto programme allows the dishwasher to detect the quantity of dishes and the level of soiling, then adjust the wash settings.
- **Delayed start.** Programme a start time of 9, 12 or 24 hours later to get your dishes clean and dry when it suits you best.



More modularity and flexibility for everyday use!

The lower basket provides intuitive storage for everyday dishes, while the upper basket can be adjusted in height even when loaded. The sliding half basket offers a smart solution for more flexible storage of your small dishes.

Silence: a golden rule until the end of the cycle!

At just 44dB(A), your appliance is as discreet as can be. While some models display the remaining time on the screen, others emit a short beep at the end of the cycle. On Full built-in models, **Spotlight** lets an orange light filter through and is projected onto the floor as an information guide.

Automatic door opening for best drying

The drying by natural convection is perfected by a feature which automatically opens to door at the end of the cycle, reduce your energy consumption.

AquaSafe: greater peace of mind

Brandt has equipped all its dishwashers with anti-overflow and anti-leak safety devices for greater user safety.







Innovation Brandt Optimum wash quality without compromise

The performance of this new technology is unique.

Combined with the Intensive, Auto or Glass programmes, it guarantees the highest washing efficiency, while reducing cycle time by a factor of four and saving 20% water and energy (compared to an Eco cycle). An additional arm releases high-pressure jets of water from the bottom of the tank. Powerful swirls of water and detergent spread into the smallest nooks and crannies to reach the dishes wherever they are and remove all traces of food residue, even the most ingrained.





Vortex \$

BKDD435J2 BLACK

- 14 place-settings
- 45 dB
- D Class
- Delayed start 12h
- 6 programmes : Intensive, Eco, Auto, Rapid 30min, Glasses, OptiA 60min
- Adjustable upper basket in loaded
- Half-load Function
- Automatic door opening
- Salt and rinsing warning lights
- Aquasafe safety
- Built-in dimensions HxWxD (mm): 820X600X580

BDJ424VLB BLACK

- 14 place-settings
- 44 dB(A)
- D Class
- Delayed start 12h
- 6 programmes : Intensive, Eco, Auto, Rapid 30min, Glasses, Vortex wash system 60min
- Adjustable upper basket in loaded
- Half-load Function
- Automatic door opening
- Salt and rinsing warning lights
- Aquasafe safety
- Built-in dimensions HxWxD (mm): 820X600X580




OptiA 60min

This programme gives perfect washing and drying results for a daily load of dishes in only 1 hour.

BDJ424LB BLACK

- 14 place-settings
- 44 dB(A)
- D Class
- Delayed start 12h
- 6 programmes : Intensive, Eco, Auto, OptiA 60min, Rapid 30min, Glasses
- Adjustable upper basket in loaded
- Half-load Function
- Automatic door opening
- Salt and rinsing warning lights
- Aquasafe safety
- Built-in dimensions HxWxD (mm): 820X600X580

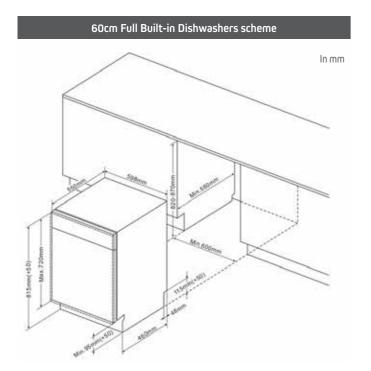

Technology invented for uncompromising results

No more handwashing! Brandt has equipped these dishwashers with an additional arm at the bottom of the tank, which distributes powerful swirls of water and detergent. This intensive wash zone makes it possible to wash the dirtiest dishes and saucepans with unequalled efficiency, while preserving fragile crockery stored in the upper basket.



Highly discreet efficiency!

These 14-cutlery models offer the very best in elegance, efficiency and functionality. Don't look for the control panel: it's hidden away on the edge of the door, out of sight. Even in operation, they have the art of being forgotten in the greatest silence, with a noise level of just 44 dB(A).









Brandt Brandt



BDJ44SLS BLACK

- 14 place-settings
- 44 dB(A)
- D Class
- Delayed start 24h
- Remaining time display
- 7 programmes: Universal, Prewash, Glasses, 90min, Intensive, Eco, Rapid 30
- Adjustable upper basket in loaded
- Half-load Function
- Automatic door opening
- Salt and rinsing warning lights
- Aquasafe safety
- Built-in dimensions HxWxD (mm): 820X600X580

BDJ424DB BLACK

- 14 place-settings
- 44 dB(A)
- D Class
- Delayed start 24h
- Remaining time display
- 6 programmes: Intensive, Eco, Auto, OptiA 60min, Rapid 30min, Glasses
- Adjustable upper basket in loaded
- Half-load Function
- Automatic door opening
- Salt and rinsing warning lights
- Aquasafe safety
- Built-in dimensions HxWxD (mm): 820X600X580

BDJ325LB BLACK

- 13 place-settings
- 45 dB(A)
- D Class
- Delayed start 12h
- 6 programmes : Intensive, Eco, Auto, 60min, Rapid 30min, Glasses
- Adjustable upper basket in loaded
- Half-load Function
- Automatic door opening
- Salt and rinsing warning lights
- Aquasafe safety
- Built-in dimensions HxWxD (mm): 820X600X580


DWJ137DS INOX

- 13 place-settings
- 47 dB(A)
- E Class
- Delayed start 24h
- Remaining time display
- 6 programmes: Intensive, Eco, Universel, 90min, Rapid 30min, Glasses
- Adjustable upper basket in loaded
- Half-loadFunction
- Salt and rinsing warning lights
- Aquasafe safety
- Built-in dimensions HxWxD (mm): 820X600X580

Automatic door opening for best drying

To maximise drying efficiency, it is essential that the hot, humid air is well circulated, drained out of the dishwasher.

That's why Brandt has come up with this new function that automatically opens the door at the end of the cycle. Simple but extremely useful: your appliance's running time is minimised; energy consumption is reduced and the drying result is optimal!

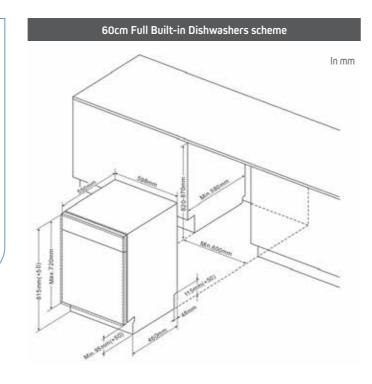

Time Efficiency and Savings

Thanks to the **Half-load function**, you don't have to wait until your dishwasher is completely full before starting your cycle, and you can save up to 35%!

• **Rapid 30min,** an effective short programme that can be used without moderation when you're in a rush and the dishes aren't too dirty.



Spotlight: elegance along with the greatest discretion

When an orange light appears above the door at the end of the cycle, Spotlight informs you that the programme is well and truly complete.





DWJ127DS INOX

- 12 place-settings
- 47 dB(A)
- E Class
- Delayed start 24h
- Remaining time display
- 6 programmes: Intensive, Eco, Universel, 90min, Rapid 30min, Glasses
- Half-load Function
- Salt and rinsing warning lights
- Aquasafe safety
- Built-in dimensions HxWxD (mm): 820X600X580w

VH1772J INOX

- 12 place-settings
- 47 dB(A)
- E Class
- Delayed start 9h
- 5 programmes: Intensive, Eco, Universel, 90min, Rapid 30min
- Adjustable upper basket in loaded
- Half-load Function
- Salt and rinsing warning lights
- Aquasafe safety
- Built-in dimensions HxWxD (mm): 820X600X580



VS1010J BLACK


- 10 place-settings
- 47 dB(A)
- E Class
- Delayed start 12h
- 6 programmes: Intensive, Eco, Universel, 90min, Rapid 30min, Glasses
- Adjustable upper basket in loaded
- Half-load Function
- Salt and rinsing warning lights
- Aquasafe safety
- Built-in dimensions HxWxD (mm): 820X450X580


Delayed start Function

Delay the start of the cycle by 9, 12 or 24 hours (depending on the model).

Once programmed, it will start up when the time comes.

The DWJ127DS dishwasher will display on screen the time remaining until the end of the cycle. It's really useful for getting organised and setting the table!

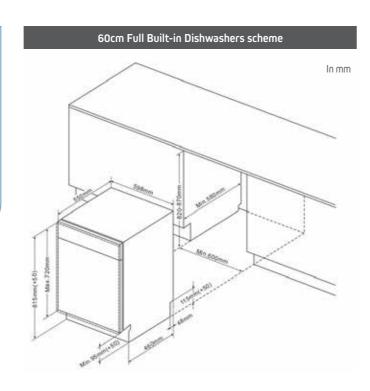

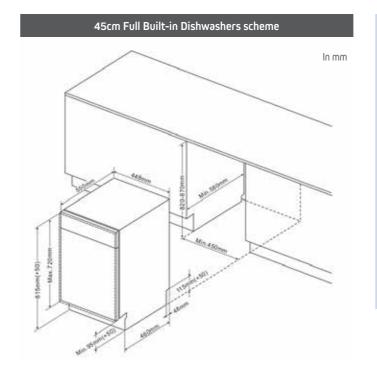

45cm of pure joy to escape the chore of washing!

If you don't cook much or don't have enough space in your kitchen, this full built-in dishwasher will be your daily ally.

Half-load Function

It means you don't have to wait for the dishwasher to be completely full before starting the wash cycle. This means substantial energy savings every day.

BUILT-IN 60CM

000

In mm



BDB424DX INOX

14 place-settings

Delayed start 24h

■ Half-load Function

Aquasafe safety

Remaining time display

Rapid 30min, Glasses

Automatic door opening Salt and rinsing warning lights

Adjustable upper basket in loaded

44 dB(A)

D Class



BDB424LW WHITE

- 14 place-settings
- 44 dB(A)
- D Class
- Delayed start 12h
- 6 programmes : Intensive, Eco, Auto, OptiA 60min,
- Half-load Function
- Automatic door opening
- Salt and rinsing warning lights
- Built-in dimensions HxWxD (mm): 820X600X580

- Rapid 30min, Glasses
- Adjustable upper basket in loaded

- Aquasafe safety

■ 45 dB(A)

BDB325LX INOX

ô ô

- 13 place-settings
- D Class
- Delayed start 12h
- 6 programmes : Intensive, Eco, Auto, 60min, Rapid 30min, Glasses
- Adjustable upper basket in loaded
- Half-load Function
- Automatic door opening
- Salt and rinsing warning lights
- Aquasafe safety
- Built-in dimensions HxWxD (mm): 820X600X580

Automatic door opening for best drying

■ 6 programmes : Intensive, Eco, Auto, OptiA 60min,

■ Built-in dimensions HxWxD (mm): 820X600X580

To maximise drying efficiency, it is essential that the hot, humid air is evacuated from the dishwasher. That's why Brandt has come up with this new function that automatically opens the door at the end of the cycle. Simple but extremely useful! The running time of your appliance is minimised, energy consumption reduced by 20% for optimum drying results!



000 BDB424LX

Available models in BLACK and INOX



BDB424LB

60cm Built-in Dishwashers scheme

and that of the great days! The upper basket is also height adjustable for greater


Adjustable upper basket in loaded

To facilitate the dishes every day

modularity.

- Loading large, bulky plates in the lower portion of the dishwasher requires raising the upper basket to the high position.
- All you have to do is carefully lift each side until engagement (depending on model).

LOW POSITION



HIGH POSITION



Installation at height

Built-in dishwashers generally fit under a worktop, but they can also be used as a stand-alone unit. Can also be fitted high up in a niche cabinet. Just think about it.



VH1772X INOX

- 12 place-settings
- 47 dB(A)
- E Class
- Delayed start 24h
- Remaining time display
- 7 programmes: Intensive, Eco, Universal, 90min, Rapid 30min, Glasses, Prewash
- Adjustable upper basket in loaded
- Half-load Function
- Salt and rinsing warning lights
- Aquasafe safety
- Built-in dimensions HxWxD (mm): 820X600X580



VS1010X INOX

- 10 place-settings
- 47 dB(A)
- E Class
- Delayed start 9h
- 6 programmes: Intensive, Eco, Universal, 90min, Rapid 30min, Glasses
- Adjustable upper basket in loaded
- Half-load Function
- Salt and rinsing warning lights
- Aquasafe safety
- Built-in dimensions HxWxD (mm): 820X450X580

A range of programmes to target efficiency!

From intensive washing to the Eco, Quick or Soaking programme, Brandt offers 7 programmes to suit all your dishes, their degree of soiling and your energy-saving requirements.

Delayed Start and Remaining time display

Delay the start of the cycle at your convenience

Once programmed, your dishwasher will start 1 to 24 hours later at a time that suits you best. It displays the time remaining to the end of the cycle throughout the programme.



60cm Built-in Dishwashers scheme In mm

Even when space is limited!

This small built-in dishwasher will be your daily ally. It fits under a worktop or high up in a standard niche unit and comes with a matching decorative door to complete the harmony of your kitchen.

Intensive: efficiency programme

Designed for washing dishes and pans very dirty, this programme provides for a pre-wash at 50°C, washing and 3 rinses (which the last is at 65°C). Ideal for effectively removing ingrained dirt.



45cm Built-in Dishwasher scheme

Half-load Function

Ideal for starting the wash cycle without waiting for the dishwasher to be completely full. You'll save a lot of energy every day.

Design and Performance

This washing machine harmoniously integrated into your kitchen, hidden behind a trim door that matches the furniture.

This washing machine seamlessly integrates into your kitchen, concealed behind a cabinet door that matches your furniture. In this way, it responds to today's trend for bathrooms and utility rooms to be designed and fitted with as much elegance and functionality as a kitchen.

With an automatic variable capacity of 9 kg, it offers a whole range of made-to-measure programmes to wash and spin all your clothes with maximum efficiency.



To take care of you and your laundry

Hygiene is a programme developed to eliminate the main viruses and up to 99% of bacteria deep down in the laundry, thanks to a 30-minute wash phase at a constant temperature (over 60°C).




Delay the start of the cycle at your convenience

Once programmed, your washing machine will start 1 to 24 hours later at a time that suits you best.





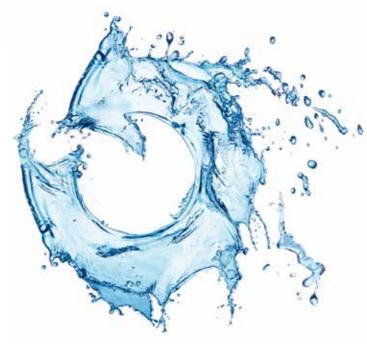


Automatic variable capacity

This full built-in washing machine adapts its consumption of electricity and water according to the load, so you do not need to wait to fill the washing machine up to clean your clothes efficiently.



WFB484QJE WHITE

- 9kg
- 1400rpm/min
- Delayed start up to 24h
- Digits display
- Automatic variable capacity
- Remaining time display
- 15 programmes : Cotton, Mixed, Colours, Wool, 20°C, Hand wash, Rapid 15min, Intensive, Eco 40-60, Hygiene, Spin speed, Rapid 60min, Jeans, Rinse, Sport
- Options: Rising +, Prewash, Steam, Anti-allergy, Quick wash, Eco Wash
- Energy consumption (kWh/cycle): 47
- Noise level: 47 dB(A)
- Built-in dimensions HxWxD (mm): 817x597x544

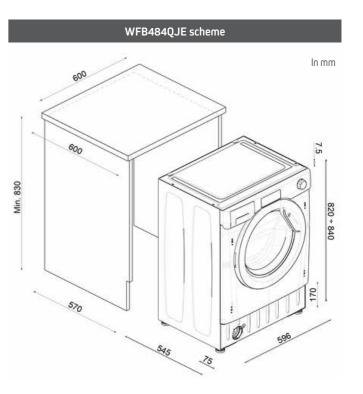

|88|



The very best in refrigeration from Brandt!

Combined, single-door all-purpose or with 4* compartment, freezer... Brandt has selected a high-performance and functional range to meet your needs. They all fit into standard niche units and come with a decorative door that is very easy to fit thanks to their sliding system.



Electronics for perfect cooling control

Whether it's on the outside of the door or inside your fridge, the temperature setting and control screen ensures optimum preservation and freezing.

Air Circulation Cooling for Ideal Freshness

This system (combined models) allows for air circulation and even distribution throughout the refrigerator compartment, allowing it to return to the ideal temperature twice as quickly after opening the door, and preserving food for longer.



Performance and economy combined!

No more defrosting and cleaning! The No Frost system on Brandt's new appliances prevents the formation of frost inside the freezer, which wastes energy..

4* to your freezer space!

Some single-door models hide a separate compartment inside that can freeze your fresh food and store frozen food for several months in optimum conditions.



Design and functional interior layout

All have sliding Securit glass shelves for easy storage, a removable bottle rack and, depending on the model, a dedicated area for the most fragile foods, where the temperature remains below 3°C.

LED lighting, not just economical

With a lifespan 25 times longer than incandescent bulbs, LED lighting provides optimum visibility whatever the level of storage inside the fridge.



Fast Cooling: to respect the cold chain!

Especially appreciated when you're back from shopping, this function allows you to lower the freezer temperature in a very short space of time to ensure that food is frozen quickly and thoroughly.



BIC7756EN


- 242 litres
- E Class
- Cabinet height 178cm
- Sliding system fixing
- LED lighting
- Climate class T
- Built-in dimensions HxWxD (mm): 1770x560x560

Fridge 179L

- Ultrafresh
- Automatic defrost
- 3 glass shelves
- 1 vegetable drawer
- 1 Bottle holder
- Bottle balconny
- 3 Balconies
- Egg section

Freezer 63L

- Fresh foods
- Automatic defrost
- 2 drawers
- 1 shelf
- Ice cube trays

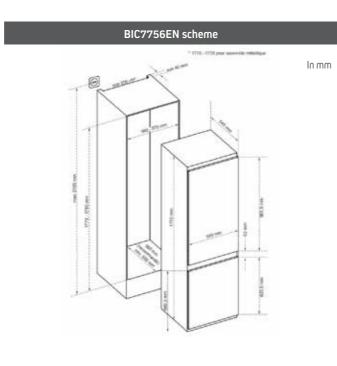

To preserve your fruit and vegetables for longer

Ultrafresh is an activated carbon filter that captures unpleasant odours and absorbs ethylene, a gas that spoils the freshness of fragile foods. As a result, your fruit and vegetables will keep three times longer.



BIC1724ES


- 249 litres
- E Class
- Cabinet height 178,5cm
- Sliding system fixing
- LED lighting
- Climate class ST
- Consumption: 0.59 kWh/24h
- Built-in dimensions HxWxD (mm): 1770x560x560

Fridge 179L

- Smart function
- Fresh Zone
- Manual desfrot
- 3 glass shelves
- 1 vegetable drawer
- 1 Bottle balconny
- 2 Balconies
- Egg Section

Freezer 70L

- Manual defrost
- 3 drawers
- Ice cube trays
- Boost function



Fast Cooling: to respect the cold chain!

Particularly useful when you're back from shopping, this function allows you to lower the freezer temperature in a very short space of time to ensure that food is frozen quickly and thoroughly.



BIS1224ES

- 181 litres
- E Class
- Cabinet height 123cm
- Sliding system fixing
- LED lighting
- Climate class ST
- Built-in dimensions HxWxD (mm): 1220x560x560

Fridge 167L

- Automatic desfrot
- 3 glass shelves
- 1 vegetable drawer
- 1 Bottle balconny
- 2 Balconies
- Egg Section

Freezer 14L

- Manual defrost
- 1 drawer

In mm

Ice cube trays

Reversible door

The reversible door is the ideal solution for adapting the appliance to the layout of the room.

4* to your freezer space!

This independent, high-performance compartment means you can freeze your fresh food and store frozen food for several months in optimum conditions.





BIL1770EB

- 294 liters
- E Class
- Cabinet height 177cm
- Sliding system fixing
- LED lighting
- Climate class SN-ST
- Built-in dimensions HxWxD (mm): 1770x560x560

Fridge 294 L

- Automatic defrost
- Booster
- Eco function
- 4 glass shelves
- 2 vegetable drawers
- 1 Bottle balconny
- 4 Balconies

In mm

■ Egg Section

All-purpose refrigerator

A generous space entirely dedicated to your fresh food


And if you combine it side by side with the **BIF7855EN** large upright freezer, you'll have over 500 litres of storage and freezing space!.

Automatic defrost

No more defrosting and cleaning chores!

10mm 540mm 15mm

BIL1224ES scheme






BIL1220ES

- 199 liters
- E Class
- Cabinet height 123cm
- Sliding system fixing
- LED lighting
- Climate class SN-ST
- Built-in dimensions HxWxD (mm): 1220x560x560

Fridge 199 L


- 3 glass shelves
- 1 vegetable drawer
- 1 Bottle balconny
- 2 Balconies
- Egg Section

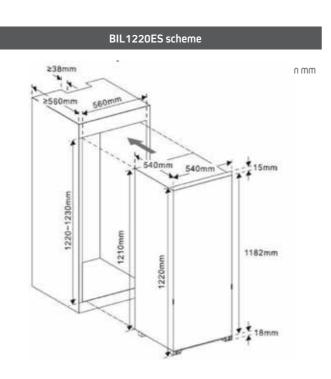




BIF7855EN

- 212 liters
- E Class
- LED lighting
- No Frost
- Climate class ST
- Freezer 212 L
- Automatic defrost
- 4 drawers
- 4 shelves
- Booster
- Twist ice
- Built-in dimensions HxWxD (mm): 1785x560x560

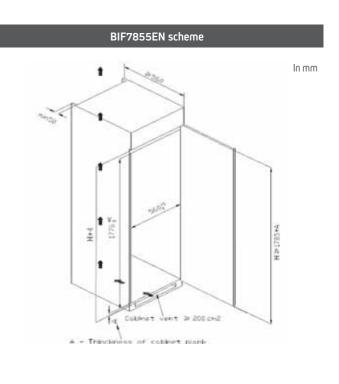

Doors' fixation by sliding



To make optimal the assembly of decorative kitchen doors with your device, brandt provide you with adapted fixations

The refrigerator and the furniture are provided with their hinges.

The opening, the device's door is embroiled by the slides in these on the furniture's slide.

This system is simple to install or to uninstall, and offer you a perfect finish.

Performance and functionality

This freezer has everything you need to store all your food in optimum conditions:

- Electronic temperature management for better cooling control
- A bright, functional layout with 4 drawers and 4 shelves
- No frost system to prevent the formation of ice
- Automatic defrosting to put an end to the chore of cleaning



When you combine this upright freezer with the BIL1770EB all-purpose single-door freezer, you get over 500 litres of storage and freezing space!



Make way for French-style conviviality

Acquiring a wine cellar allows you to preserve your bottles under optimal conditions (stabilized temperature, absence of light, controlled humidity, etc.) and also meets the need to have your wine bottles readily available for any occasion, served at the right temperature.

Preserving and aging bottles under optimal conditions is essential for wines often purchased too young to be consumed immediately. This practice helps avoid unpleasant surprises during tasting.

Brandt presents its new wine cellars, offering you the pleasure of serving one of your finest wines at your table and sharing it with family and friends, albeit in moderation. Their small dimensions and pure, contemporary design combine with performance that's second to none to larger capacity wine cellars.

Elegant and silent, to blend discreetly and harmoniously into any living space, these wine cellars boast low F-rated energy consumption and low noise levels - only 39 dB(A) for the BIW28FB model.









To preserve each grand cru in optimum conditions

They feature a compartment fitted with wooden shelves that can store up to 36 bottles, depending on the model, and inside which the appropriate temperature is precisely managed and electronically controlled. The LED lighting makes it easy to see which bottles are being stored.

A great deal of attention has been paid to their technological design:

Control panel

concealed behind a sleek glass front, with control lock system (child safety).

Anti-UV glass holder

that filters out the ultraviolet rays that can cause irreversible oxidation of the tannins.

Anti-vibration system

The motor mounted on a Silent Bloc protects the wine from any vibrations that could alter its appearance and taste when the deposit is mixed.

Temperature alarm

When the temperature in the cellar does not match the selected temperature, or if the difference is plus or minus 5 degrees, an alarm sounds to let you know.





BIW36FB BLACK

- Up to 36 bottles
- Glass door treated anti-UV
- Anti-vibration system
- Electronic temperature management
- Temperature alarm
- Wood shelves
- Temperature display
- Inside lighting
- Built-in dimensions HxWxD (mm): 590X560X560

BIW28FB BLACK


- Up to 28 bottles
- Anti-vibration system
- Electronic temperature management
- Temperature alarm
- Wood shelves
- Temperature display
- Inside lighting

In mm


■ Built-in dimensions HxWxD (mm): 450X560X560

BUW20FB BLACK


- Up to 20 bottles
- Anti-vibration system
- Wood shelves
- Temperature display
- Inside lighting
- Built-in dimensions HxWxD (mm): 825x300x575

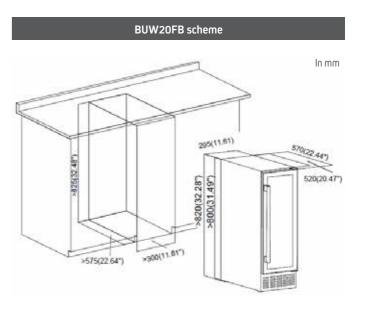

BIW36FB scheme

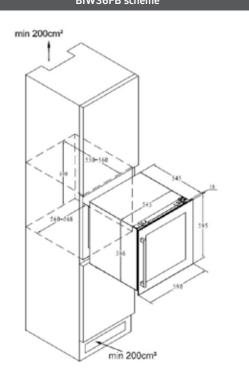

BIW28FB scheme

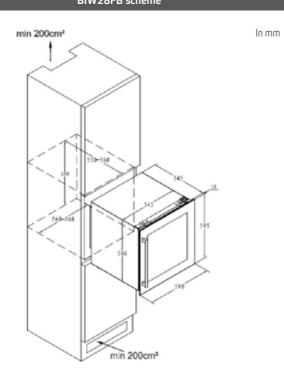

Optimum storage conditions

Tinted glass and LED lighting

Perfect visibility of your bottles while keeping them protected from direct light and UV rays.

Anti-vibration system

A guarantee of even greater silence - 39 dB(A) - it protects your wine and allows it to mature in optimum conditions.

OVENS

Black			B0P7544B		B0P7537B	B0P7533B
Full black	BOR7586BB	B0P7568BB		B0P7539BB	B0P7537BB	B0P7533BB
White					B0P7537W	
nox		B0P7568LX	B0P7544LX		BOP7537LX	
GENERAL FEATURES						
nergy efficiency class	A+	A+	A+	A+	A+	A+
Energy Efficiency Index (EEI) (kWh)	81,4	81,4	81,4	81,4	81,4	81,4
Energy consumption per cycle n conventional-traditional function	0.70	0.70	0.70	0.70	0.70	0.70
(kWh) Forced convection energy consumption per cycle (kW/h)	1.10	1.10	1.10	1.10	1.1	1.1
Standby consumption (W)	0,99		0.38	0.79	0.79	0.79
lumber of cavities	1 cavity	1 cavity	1 cavity	1 cavity	1 cavity	1 cavity
Cavity capacity (L)	73	73	73	73	73	73
Cavity materials	Enamel	Enamel	Enamel	Enamel	Enamel	Enamel
nergy type	Electric	Electric	Electric	Electric	Electric	Electric
ADDITIONAL FEATURES	AA II'S I' . DI					
Cooking mode	MultifonctionPlus + Combi Steam + 100% Steam	Multifunction Plus	Multifunction Plus	Multifunction Plus	Multifunction Plus	Multifunction Plus
Number of cooking functions	11	11	9	9	9	9
Fanned heat / Fan assisted heat	No / Yes	No / Yes	No / Yes	No / Yes	Yes / Yes	No / Yes
Conventional	Yes	Yes	Yes	Yes	Yes	Yes
Bottom + Fan	Yes	Yes	Yes	Yes	Yes	Yes
Eco	Yes	Yes	Yes	Yes	Yes	Yes
Grill + 4 levels	-	Yes	Yes	res	163	162
Fanned Grill					-	Vos
	Yes / No	Yes -	Yes -	Yes	-	Yes
Bread / Pizza function Steam cooking (fish, poultry	Yes / No	-	-	-	-	-
ond white meat)	-	-	-	Yes / Yes / Yes	Yes / Yes / Yes	Yes / Yes / Yes
Full grill	Yes	Yes	-	Yes	Yes	Yes
Culinary Guide	35 recipes	12 recipes	12 recipes	-	-	-
Steam Guide /	Yes	Yes				
Combi Steam Guide	Yes	No	-	-	-	-
Autocook	-	Yes/ 12 recipes	-	-	-	-
Orying / Shabat functions	Yes / Yes	-	-	-	-	-
Keep Warm	Yes	Yes				
Defrosting	Yes	-	Yes	-	-	-
Smart Assist	Yes	Yes	Yes	Yes	Yes	Yes
Cleaning mode	Pyrolytic	Pyrolytic	Pyrolytic	Pyrolytic	Pyrolytic	Pyrolytic
Clean (35min) / Clean 39'	No / No	No / Yes	No / No	No / Yes	No / Yes	No / Yes
Pyro Express (59min) /	Yes / Yes	No / No	Yes / Yes	No / No	No / Yes	No / No
Pyro Eco 1H30 Pyro Auto 1H30 / Pyro Turbo 2H	No / Yes	Yes / Yes	No / Yes	Yes / Yes	Yes / Yes	Yes / Yes
OVEN	NO / Tes	1637 163	1407 163	1637 163	1637 163	1637 163
UVEN	DV2 2TET	COLLTET	cva	LV4	LX1	LX1
Display	DX2 2TFT Colour 45x60	S3H TFT Colour 45x60	SX3 white display	LX1 (White LED, 70x20mm)	(White LED, 70x20mm)	(White LED, 70x20m
Soft close door	Drop-down Soft close	Drop-down Soft close	Drop-down Soft close	Drop-down Soft close	Drop-down	Drop-down
Door	Cold-4 glasses	Cold-4 glasses	·			-1
				L.OIO-4 GIASSES	Cold-4 plasses	Cold-4 plasses
Inner door type:	V	-	Cold-4 glasses	Cold-4 glasses	Cold-4 glasses	Cold-4 glasses
Removable full glass	Yes	Yes	Yes	Yes	Yes	Yes
Inner door type: Removable full glass Type of side racks	Yes Wire	-		_		Yes
Removable full glass Type of side racks		Yes	Yes	Yes	Yes	Yes
Removable full glass Type of side racks Power of light (W) ACCESSORIES	Wire	Yes 2-point chrome-plate	Yes Chrome-plated wire 6	Yes Chrome-plated wire 6	Yes Chrome-plated wire 6	Yes 2-point chrome-pla
Removable full glass Type of side racks Power of light (W) ACCESSORIES Telescopic racks:	Wire	Yes 2-point chrome-plate	Yes Chrome-plated wire 6	Yes Chrome-plated wire 6	Yes Chrome-plated wire 6	Yes 2-point chrome-pla
Removable full glass Type of side racks Power of light (W) ACCESSORIES Felescopic racks: Sliding system partial	Wire 25 Yes	Yes 2-point chrome-plate 25 Yes	Yes Chrome-plated wire 6 25 Yes	Yes Chrome-plated wire 6 25 Yes	Yes Chrome-plated wire 6 25 Yes	Yes 2-point chrome-pla 25 Yes
Removable full glass Type of side racks Power of light (W) ACCESSORIES Telescopic racks: Sliding system partial Anti-tipping safety flat grid	Wire 25 Yes Yes	Yes 2-point chrome-plate 25 Yes Yes	Yes Chrome-plated wire 6 25 Yes Yes	Yes Chrome-plated wire 6 25 Yes Yes	Yes Chrome-plated wire 6 25 Yes Yes	Yes 2-point chrome-pla 25 Yes Yes
Removable full glass Type of side racks Power of light (W) ACCESSORIES Telescopic racks: Sliding system partial Anti-tipping safety flat grid Drip tray 20mm	Wire 25 Yes Yes Yes	Yes 2-point chrome-plate 25 Yes Yes Yes Yes	Yes Chrome-plated wire 6 25 Yes Yes Yes	Yes Chrome-plated wire 6 25 Yes Yes Yes	Yes Chrome-plated wire 6 25 Yes Yes Yes	Yes 2-point chrome-pla 25 Yes Yes Yes
Removable full glass Type of side racks Power of light (W) ACCESSORIES Telescopic racks: Sliding system partial Anti-tipping safety flat grid Drip tray 20mm Drip tray 45mm	Wire 25 Yes Yes Yes Yes	Yes 2-point chrome-plate 25 Yes Yes Yes Yes Yes Yes	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes Yes	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes Yes	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes	Yes 2-point chrome-pla 25 Yes Yes Yes Yes Yes Yes
Removable full glass Type of side racks Power of light (W) ACCESSORIES Telescopic racks: Sliding system partial Anti-tipping safety flat grid Drip tray 20mm Drip tray 45mm Steam stainless steel dish + support	Wire 25 Yes Yes Yes	Yes 2-point chrome-plate 25 Yes Yes Yes Yes	Yes Chrome-plated wire 6 25 Yes Yes Yes	Yes Chrome-plated wire 6 25 Yes Yes Yes	Yes Chrome-plated wire 6 25 Yes Yes Yes	Yes 2-point chrome-pla 25 Yes Yes Yes
Removable full glass Type of side racks Power of light (W) ACCESSORIES Telescopic racks: Sliding system partial Anti-tipping safety flat grid Drip tray 20mm Drip tray 45mm Steam stainless steel dish + support INSTALLATION	Wire 25 Yes Yes Yes Yes	Yes 2-point chrome-plate 25 Yes Yes Yes Yes Yes Yes	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes Yes	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes Yes	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes -	Yes 2-point chrome-pla 25 Yes Yes Yes Yes Yes Yes Yes
Removable full glass Type of side racks Power of light (W) ACCESSORIES Telescopic racks: Sliding system partial Anti-tipping safety flat grid Drip tray 20mm Drip tray 45mm Steam stainless steel dish + support INSTALLATION Fan motor (W)	Wire 25 Yes Yes Yes Yes Yes	Yes 2-point chrome-plate 25 Yes Yes Yes Yes Yes 30	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes Yes 25	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes Yes Yes Yes	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25	Yes 2-point chrome-pla 25 Yes Yes Yes Yes Yes Yes 25
Removable full glass Type of side racks Power of light (W) ACCESSORIES Telescopic racks: Sliding system partial Anti-tipping safety flat grid Drip tray 20mm Drip tray 45mm Steam stainless steel dish + support INSTALLATION Fan motor (W) Grill power (W)	Wire 25 Yes Yes Yes Yes Yes 30 2100	Yes 2-point chrome-plate 25 Yes Yes Yes Yes Yes 20 2100	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes 25 2100	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes 25 2100	Yes 2-point chrome-pla 25 Yes Yes Yes Yes Yes 25 2100
Removable full glass fupe of side racks Power of light (W) ACCESSORIES Felescopic racks: Sliding system partial Anti-tipping safety flat grid Drip tray 20mm Drip tray 45mm Steam stainless steel dish + support INSTALLATION Fan motor (W) Grill power (W) Circular heating element (W)	Yes Yes Yes Yes Yes Yes 2100 2000	Yes 2-point chrome-plate 25 Yes Yes Yes Yes Yes 2-000 2000	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes 25 2100 2000	Yes 2-point chrome-pla 25 Yes Yes Yes Yes 25 25 2100 2000
Removable full glass Type of side racks Power of light (W) ACCESSORIES Felescopic racks: Sididing system partial Anti-tipping safety flat grid Drip tray 20mm Drip tray 45mm Steam stainless steel dish + support INSTALLATION Fan motor (W) Strill power (W) Circular heating element (W) Foldage (V)/ Frequency (Hz) /	Wire 25 Yes Yes Yes Yes Yes 30 2100	Yes 2-point chrome-plate 25 Yes Yes Yes Yes Yes 20 2100	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes 25 2100	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes 25 2100	Yes 2-point chrome-pla 25 Yes Yes Yes Yes 25 25 2100 2000
Removable full glass Type of side racks Power of light (W) ACCESSORIES Felescopic racks: Jiding system partial Anti-tipping safety flat grid Drip tray 20mm Drip tray 20mm Drip tray 45mm Steam stainless steel dish + support INSTALLATION Fan motor (W) Frill power (W) Circular heating element (W) Voltage (V)/ Frequency (Hz) / Fuse (A)	Yes Yes Yes Yes Yes Yes 2100 2000	Yes 2-point chrome-plate 25 Yes Yes Yes Yes Yes 2-000 2000	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes 25 2100 2000	Yes 2-point chrome-pla 25 Yes Yes Yes Yes Yes 25 2100 2000
Removable full glass Type of side racks Power of light (W) ACCESSORIES Felescopic racks: Jiding system partial Anti-tipping safety flat grid Drip tray 20mm Drip tray 20mm Drip tray 45mm Steam stainless steel dish + support INSTALLATION Fan motor (W) Frill power (W) Circular heating element (W) Voltage (V)/ Frequency (Hz) / Fuse (A)	Yes Yes Yes Yes Yes Yes Yes Yes 2000 220-240/50/60/16	Yes 2-point chrome-plate 25 Yes Yes Yes Yes Yes Yes 2000 220-240/50/60/16	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16	Yes 2-point chrome-pla 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/1
Removable full glass Type of side racks Power of light (W) ACCESSORIES Felescopic racks: Jiding system partial Anti-tipping safety flat grid Drip tray 20mm Drip tray 45mm Steam stainless steel dish + support INSTALLATION Fan motor (W) Sirill power (W) Circular heating element (W) Voltage (V)/ Frequency (Hz) / Fuse (A) Length of power supply cord (cm) DIMENSIONS-WEIGHT	Yes Yes Yes Yes Yes Yes Yes Yes 2000 220-240/50/60/16	Yes 2-point chrome-plate 25 Yes Yes Yes Yes Yes Yes 2000 220-240/50/60/16	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16	Yes 2-point chrome-pla 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/1
Removable full glass Type of side racks Power of light (W) ACCESSORIES Islescopic racks: Slidiong system partial Anti-tipping safety flat grid Drip tray 20mm Drip tray 45mm Steam stainless steel dish + support INSTALLATION Fan motor (W) Grill power (W) Circular heating element (W) Voltage (V)/ Frequency (Hz) / Fuse (A) Length of power supply cord (cm) DIMENSIONS-WEIGHT Built-in HxWxD (mm)	Wire 25 Yes Yes Yes Yes Yes 2100 2000 220-240/50/60/16 130	Yes 2-point chrome-plate 25 Yes Yes Yes Yes Yes Yes 2000 2100 2000 220-240/50/60/16 115	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16 115	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16 115	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16 115	Yes 2-point chrome-pla 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/1
Removable full glass Type of side racks Power of light (W) ACCESSORIES Felescopic racks: Jiding system partial Anti-tipping safety flat grid Drip tray 20mm Drip tray 45mm Steam stainless steel dish + support INSTALLATION Fan motor (W) Srill power (W) Circular heating element (W) Voltage (V)/ Frequency (Hz) / Fuse (A) Length of power supply cord (cm) DIMENSIONS-WEIGHT Built-in HxWxD (mm) Unboxed product HxWxD (mm)	Wire 25 Yes Yes Yes Yes Yes 2100 2000 220-240/50/60/16 130	Yes 2-point chrome-plate 25 Yes Yes Yes Yes Yes Yes 30 2100 2000 220-240/50/60/16 115 585X560X550	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16 115 585X560X550	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16 115 585X560X550	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16 115 585X560X550	Yes 2-point chrome-pla 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/1 115
Removable full glass Type of side racks Power of light (W) ACCESSORIES Felescopic racks: Jiding system partial Anti-tipping safety flat grid Drip tray 20mm Drip tray 45mm Steam stainless steel dish + support INSTALLATION Fan motor (W) Grill power (W) Circular heating element (W) Voltage (V)/ Frequency (Hz) / Fuse (A) Length of power supply cord (cm) DIMENSIONS-WEIGHT Built-in HXWXD (mm) Unboxed product HXWXD (mm) Packed product HXWXD (mm)	Wire 25 Yes Yes Yes Yes Yes 2100 2000 220-240/50/60/16 130 585X560X550 592X592X622	Yes 2-point chrome-plate 25 Yes Yes Yes Yes Yes Yes 30 2100 2000 220-240/50/60/16 115 585X560X550 592X592X622	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16 115 585X560X550 596X592X544	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16 115 585X560X550 596X592X544	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16 115 585X560X550 596X592X544	Yes 2-point chrome-pla 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/1 115 585X560X550 596X592X544
Removable full glass Type of side racks Power of light (W) ACCESSORIES Telescopic racks: Sliding system partial Anti-tipping safety flat grid Drip tray 20mm Drip tray 45mm Steam stainless steel dish + support INSTALLATION Fan motor (W) Grill power (W) Circular heating element (W) Voltage (V)/ Frequency (Hz) / Fuse (A) Length of power supply cord (cm) DIMENSIONS-WEIGHT Built-in HxWxD (mm) Unboxed product HxWxD (mm) Packed product HxWxD (mm) Cavity HxWxD (mm)	Wire 25 Yes Yes Yes Yes Yes 2100 2000 220-240/50/60/16 130 585X560X550 592X592X622 670X640X660	Yes 2-point chrome-plate 25 Yes Yes Yes Yes Yes Yes 30 2100 2000 220-240/50/60/16 115 585X560X550 592X592X622 670X640X660	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16 115 585X560X550 596X592X544 670X640X660 382X474X405	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes Yes - 25 2100 2000 220-240/50/60/16 115 585X560X550 596X592X544 670X640X660 382X474X405	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16 115 585X560X550 596X592X544 670X640X660 382X474X405	Yes 2-point chrome-pla 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/1 115 585X560X550 596X592X544 670X640X660 382X474X405
Removable full glass Type of side racks Power of light (W) ACCESSORIES Felescopic racks: Jiding system partial Anti-tipping safety flat grid Drip tray 20mm Drip tray 45mm Steam stainless steel dish + support INSTALLATION Fan motor (W) Grill power (W) Circular heating element (W) Voltage (V)/ Frequency (Hz) / Fuse (A) Length of power supply cord (cm) DIMENSIONS-WEIGHT Suilt-in HXWXD (mm) Johoxade product HXWXD (mm) Packed product HXWXD (mm) Cavity HXWXD (mm) Net weight (kg)/Gross weight (kg)	Wire 25 Yes Yes Yes Yes Yes 2100 2000 220-240/50/60/16 130 585X560X550 592X592X622	Yes 2-point chrome-plate 25 Yes Yes Yes Yes Yes Yes 30 2100 2000 220-240/50/60/16 115 585X560X550 592X592X622	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes - 25 2100 2000 220-240/50/60/16 115 585X560X550 596X592X544 670X640X660	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16 115 585X560X550 596X592X544 670X640X660	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16 115 585X560X550 596X592X544 670X640X660	Yes 2-point chrome-pla 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/1 115 585X560X550 596X592X544 670X640X660
Removable full glass Type of side racks Power of light (W) ACCESSORIES Felescopic racks: Jidling system partial Anti-tipping safety flat grid Drip tray 20mm Drip tray 45mm Steam stainless steel dish + support INSTALLATION Fan motor (W) Grill power (W) Circular heating element (W) Voltage (V)/ Frequency (Hz) / Fuse (A) Length of power supply cord (cm) DIMENSIONS-WEIGHT Suilt-in HXWXD (mm) Johoxed product HXWXD (mm) Packed product HXWXD (mm) Cavity HXWXD (mm) Net weight (kg)/Gross weight (kg) EAN CODE	Wire 25 Yes Yes Yes Yes Yes 2100 2000 220-240/50/60/16 130 585X560X550 592X592X622 670X640X660	Yes 2-point chrome-plate 25 Yes Yes Yes Yes Yes Yes 30 2100 2000 220-240/50/60/16 115 585X560X550 592X592X622 670X640X660	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16 115 585X560X550 596X592X544 670X640X660 382X474X405 36.8/38.1	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes Yes - 25 2100 2000 220-240/50/60/16 115 585X560X550 596X592X544 670X640X660 382X474X405	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16 115 585X560X550 596X592X544 670X640X660 382X474X405 37.6/39.2	Yes 2-point chrome-pla 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/1 115 585X560X550 596X592X544 670X640X660 382X474X405 37/38.2
Removable full glass Type of side racks Power of light (W) ACCESSORIES Felescopic racks: Sididing system partial Anti-tipping safety flat grid Drip tray 20mm Drip tray 45mm Steam stainless steel dish + support INSTALLATION Fan motor (W) Strill power (W) Forcular heating element (W) Foliage (V)/ Frequency (Hz) / Fuse (A) Length of power supply cord (cm) DIMENSIONS-WEIGHT Sullt-in HXWXD (mm) Johoxed product HXWXD (mm) Packed product HXWXD (mm) Cavity HXWXD (mm) Wet weight (kg)/Gross weight (kg) EAN CODE	Wire 25 Yes Yes Yes Yes Yes 2100 2000 220-240/50/60/16 130 585X560X550 592X592X622 670X640X660 44,1/45,6	Yes 2-point chrome-plate 25 Yes Yes Yes Yes Yes Yes 2100 2000 220-240/50/60/16 115 585X560X550 592X592X622 670X640X660 38.6/39.9	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16 115 585X560X550 596X592X544 670X640X660 382X474X405	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16 115 585X560X550 596X592X544 670X640X660 382X474X405 39.3 /40.6	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16 115 585X560X550 596X592X544 670X640X660 382X474X405 37.6/39.2	Yes 2-point chrome-pla 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/1 115 585X560X550 596X592X544 670X640X660 382X474X405 37/38.2
Removable full glass Type of side racks Power of light (W) ACCESSORIES Felescopic racks: Sididing system partial Anti-tipping safety flat grid Drip tray 20mm Drip tray 45mm Steam stainless steel dish + support INSTALLATION Fan motor (W) Sirill power (W) Circular heating element (W) Foldage (V)/ Frequency (Hz) / Fuse (A) Length of power supply cord (cm) DIMENSIONS-WEIGHT Sullt-in HXWXD (mm) Johoxed product HXWXD (mm) Packed product HXWXD (mm) Cavity HXWXD (mm) Welt weight (kg)/Gross weight (kg) EAN CODE	Wire 25 Yes Yes Yes Yes Yes 2100 2000 220-240/50/60/16 130 585X560X550 592X592X622 670X640X660	Yes 2-point chrome-plate 25 Yes Yes Yes Yes Yes Yes 30 2100 2000 220-240/50/60/16 115 585X560X550 592X592X622 670X640X660	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16 115 585X560X550 596X592X544 670X640X660 382X474X405 36.8/38.1	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes Yes - 25 2100 2000 220-240/50/60/16 115 585X560X550 596X592X544 670X640X660 382X474X405	Yes Chrome-plated wire 6 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/16 115 585X560X550 596X592X544 670X640X660 382X474X405 37.6/39.2	Yes 2-point chrome-pla 25 Yes Yes Yes Yes Yes 25 2100 2000 220-240/50/60/1 115 585X560X550 596X592X544 670X640X660 382X474X405

REFERENCES						
Black	B0P2438B	B0P7332B		B0P2112B		B0H7532B
Full black	B0P2438BB	BOF 7332B		BOT 2 1 12B		B0H7532BB
White	BOT 2430BB					B0117332BB
Inox			B0P2432X		B0H7534LX	B0H7532LX
GENERAL FEATURES						
Energy efficiency class	A+	A+	A+	A+	A+	А
Energy Efficiency Index (EEI) (kWh)	81,9	81,4	81,9	81,9	95,3	95,3
Energy consumption per cycle in conventional-traditional function (kWh)	0.68	0.70	0.68	0.68	0,82	0.82
Forced convection energy consumption per cycle (kW/h)	0.76	1.1	0.80	0.80	1,23	1.23
Standby consumption (W)		0.79		0.94		
Number of cavities	1 cavity	1 cavity	1 cəvity	1 cavity	1 cavity	1 cavity
Cavity capacity (L)	67	73	67	67	73	73
Cavity materials	Enamel	Enamel	Enamel	Enamel	Enamel	Enamel
Energy type	Electric	Electric	Electric	Electric	Electric	Electric
ADDITIONAL FEATURES						
Cooking mode	Multifunction Plus	Multifunction	Multifunction	Multifunction	Multifunction Plus	Multifunction Plus
Number of cooking functions	10 Voc / Voc	6 No / Yes	10 Voc / No	10 Yes / No	7	7
Fanned heat / Fan assisted heat Conventional	Yes / Yes Yes	No / Yes Yes	Yes / No Yes	Yes / No Yes	No / Yes Yes	No / Yes Yes
Bottom + Fan	Yes	Yes	Yes	Yes	- Tes	res -
Eco	Yes	Yes	Yes	Yes	Yes	Yes
Grill + 4 levels	Yes	-	Yes	Yes	-	-
Fanned Grill	Yes	Yes	Yes	Yes	Yes	Yes
Bread / Pizza function	Yes / No	-	Yes / No	Yes / No	-	-
Steam cooking (fish, poultry and white meat)	-	-	-	Yes / Yes / Yes	Yes / Yes / No	Yes / Yes / No
Full grill	-	Yes	Yes	-	Yes	Yes
Culinary Guide	12 recipes	-	12 recipes	-	-	-
Steam Guide /	Yes	-	Yes	-	-	-
Combi Steam Guide Autocook	No -	_	No -	_	_	_
Drying / Shabat functions	-	-	-	-	-	-
Defrosting	-	-	-	-	-	-
Smart Assist	Yes	Yes	Yes	Yes	Yes	Yes
Cleaning mode	Pyrolytic	Pyrolytic	Pyrolytic	Pyrolytic	Hydrolysis	Hydrolysis
Clean (35min) / Clean 39'	No / No	No / No	No / No	No / No	Yes / No	Yes / No
Pyro Express (59min) / Pyro Eco 1H30	Yes / Yes	No / No	Yes / Yes	Yes / Yes	No / No	No / No
Pyro Auto 1H30 / Pyro Turbo 2H	No / Yes	No / Yes	No / Yes	No / Yes	No / No	No / No
OVEN						
Display	White LCD screen	LX1 (White LED, 70x20mm)	White LCD screen	Red LED screen	LX1 (White LED, 70x20mm)	LX1 (White LED, 70x20mm)
Soft close door	Drop-down Soft close	Drop-down	Drop-down Soft	Drop-down Soft	Drop-down Soft close	Drop-down
Door	Cold-4 glasses	Cold-4 glasses	Cold-4 glasses	Cold-4 glasses	Fanned 2 glasses	Fanned 2 glasses
Inner door type: Removable full glass	Yes	Yes	Yes	Yes	Yes	Yes
Type of side racks	Stamped	2-point chrome-plate	Stamped	Stamped	Chrome-plated wire 6	2-point chrome-plate
Power of light (W)	25	25	25	25	25	25
ACCESSORIES						
Telescopic racks: Sliding system partial	Yes	Yes	Yes	Yes	Yes	Yes
Anti-tipping safety flat grid	Yes	Yes	Yes	Yes	Yes	Yes
Drip tray 20mm	Yes in 8mm	Yes	Yes in 8mm	No	Yes	Yes
Drip tray 45mm	Yes	Yes	Yes	Yes	Yes	Yes
Steam stainless steel dish + support	-	-	-	-	-	-
INSTALLATION						
Fan motor (W)	25	25	25	25	25	25
Grill power (W) Circular heating element (W)	2100 2000	2100	2100	2100	1800 2000	1800 2000
Voltage (V)/ Frequency (Hz) /	220-240/50/60/16	220-240/50/60/16	220-240/50/60/16	220-240/50/60/16	220-240/50/60/16	220-240/50/60/16
Fuse (A)						
Length of power supply cord (cm) DIMENSIONS- WEIGHT	115	115	115	115	115	115
Built-in HxWxD (mm)	585X560X550	585X560X550	585X560X550	585X560X550	585X560X550	585X560X550
Unboxed product HxWxD (mm)	592X592X608	596X592X544	592X592X608	592X592X608	596X592X544	596X592X544
Packed product HxWxD (mm)	670X640X660	670X640X660	670X640X660	670X640X660	670X640X660	670X640X660
Cavity HxWxD (mm)		382X474X405			382X474X405	382X474X405
Net weight (kg)/Gross weight (kg)	37.3/38.6	36.8/38.1	34.4/35.7	33.2/34.5	33.3/34.5	30.6/32.7
EAN CODE						
Black	3660767988149	3660767981201		3660767983618		3660767981157
Full black White	3660767991088					3660767981164
White Inox			3660767983700		3660767981188	3660767981997
IIIOA			3000/0/903/00		3000707901100	3000/0/90199/

OVENS

REFERENCES						
Black	B0H3415A					
-ull black		B0H1325BB	B0H1224BB	B0H1222BB		
White						
nox	B0H3415X	B0H1325X	B0H1224X	B0H1222X	B0E1120X	B0E1000X
GENERAL FEATURES	2011271211					
Energy efficiency class	Α	А	А	Α	Α	А
	89.5	94.6	120.7	94.2	95.1	95.3
Energy Efficiency Index (EEI) (kWh)	69.5	94.0	120.7	94.2	95.1	95.5
Energy consumption per cycle in conventional-traditional function (kWh)	0.77	0.91	0.99	0.91	0.86	0.81
Forced convection energy	0.86	0.81	0.87	0.81	0.78	0
consumption per cycle (kW/h)						
Standby consumption (W)	0.73	0.45	0.59	0.59	< 1 Wh	< 1 Wh
Number of cavities	1 cavity	1 cavity	1 cavity	1 cavity	1 cavity	1 cavity
Cavity capacity (L)	73	73	73	73	65	72
Cavity materials	Enamel	Enamel	Enamel	Enamel	Enamel	Enamel
Energy type	Electric	Electric	Electric	Electric	Electric	Electric
ADDITIONAL FEATURES						
Cooking mode	Multifunction Plus	Multifunction Plus	Multifunction Plus	Multifunction	Multifunction Plus	Natural convection
-	10	8	8	6	8	5
lumber of cooking functions						
anned heat / Fan assisted heat	Yes / Yes	Yes / Yes	Yes / Yes	Yes / No	Yes / Yes	-
Conventional	Yes	Yes	Yes	Yes	Yes	Yes
Sottom / Top		-	-	Yes / No	-	No / Yes
Bottom + Fan	Yes	-	-	Yes	Yes/-	-/Yes
Eco	Yes	-	-	-	-	-
Grill	-	Yes	Yes	Yes	Yes	Yes
Grill + 4 levels	Yes	-	-	-	-	-
Fanned Grill	Yes	Yes	Yes	Yes	Yes	-
Bread / Pizza function	Yes / No	No / Yes	No / Yes	-	No / Yes	-
Steam cooking (fish, poultry						
nd white meat)	-	-	-	-	-	-
'ull grill	-	Yes	Yes	Yes	Yes	Yes
Culinary Guide	12 recipes	-	-	-	-	-
Steam Guide /			_	-		
Combi Steam Guide	-	-	-	-	-	-
Defrosting	-	Yes	Yes	Yes	Yes	-
Smart Assist	-	-	-	-	-	-
Cleaning mode	Hydrolysis	Hydrolysis	Hydrolysis	Hydrolysis	Manual	Manual
Clean (35min) / Clean 39'	Yes / No	Yes / No	Yes / No	Yes / No	No / No	No / No
Pyro Express (59min) /	No / No	No / No			No / No	
Pyro Eco 1H30	NU / NU	NU / NU	No / No	No / No	No / No	No / No
Pyro Auto 1H30 / Pyro Turbo 2H	No / No	No / No	No / No	No / No	No / No	No / No
OVEN					ı	
Display	White LCD screen	White LCD screen	White LCD screen	White LCD screen	red led screen	White LCD screen
Soft close door	Drop-down	Drop-down	Drop-down	Drop-down	Drop-down	Drop-down
Door	Fanned 2 glasses	Fanned 2 glasses	Fanned 2 glasses	Fanned 2 glasses	Fanned 2 glasses	Fanned 2 glasses
nner door type: Removable full glass	Yes	Yes	Yes	Yes	Yes	Yes
'upe of side racks	Chrome-plated wire 6	Wired	Stamped	Stamped	Stamped	Stamped
Power of light (W)	25	25	25	25	25	25
-	25	25	23	23	23	25
ACCESSORIES						
'elescopic racks: Sliding system partial	Yes	Yes	Yes	Yes	Yes	Yes
Anti-tipping safety flat grid	Yes	Yes	Yes	Yes	Yes	Yes
Orip tray 20mm	No	No	No	No	No	No
Orip tray 45mm	Yes	Yes	Yes	Yes	Yes	Yes
Steam stainless steel dish + support						
INSTALLATION						
an motor (W)	25					
Frill power (W)	2100	1200	1200	1200		1200
Circular heating element (W)	2000	2000	2000	0	2000	0
/oltage (V)/ Frequency (Hz) /	220-240/50/60/16	220-240/50/60/12	220-240/50/60/12	220-240/50/60/12	220-240/50/60/14	220-240/50/60/12
use (A)						
ength of power supply cord (cm)	115	120	160	160	160	160
DIMENSIONS- WEIGHT						
Built-in HxWxD (mm)	585X560X550	600X560X570	600X560X555	600X560X555	600X560X570	590X560X555
Jnboxed product HxWxD (mm)			560X555X590	560x555x590		
Packed product HxWxD (mm)	670X640X660	650X640X650	650X640X650	650x640x650	650x650x640	650X640X650
Cavity HxWxD (mm)	382X474X405	392X476X413	450X413X392	450X413X392	450x352x413	352x450x452
Net weight (kg)/Gross weight (kg)	30.7/32.1	36.38/38.20	30.95/32.80	33.27/35.23	30/31	26.76/28.61
EAN CODE	23.7.02.1	22.55, 55.25	22.00, 02.00	13.27.00.20	33.5.	25.7 5. 20.0 1
	200000000000					
Black	3660767988583					
ull black		3660767989849	3660767989818	3660767989788		
Vhite						
					3660767988767	

	FULL BUILT-IN COMBINED	FULL BUILT-IN Combined	FULL BUILT-IN SOLO	BUILT-IN Grill	BUILT-IN GRILL	BUILT-IN GRILL
REFERENCES						
Black				BMG2120B	BMG2115B	BMG2112B
Full black	BKC7154BB	BKC7153BB	BKS7131BB			
White	BKC7154W			BMG2120W		
Inox	BKC7154LX	BKC7153LX		BMG2120X	BMG2115X	
GENERAL FEATURES		ı	ı			
Volume (L)	40	40	40	25	25	25
Electronic programming	Yes	Yes	Yes	Yes	Yes	Yes
Control panel	Knob	Dual display/ Touch sensitive	Knob	Touch sensitive	Buttons & Knob	Buttons & Knob
Cavity	Enamelled	Enamelled	Enamelled	Stainless steel	Stainless steel	Stainless steel
Display	White led	White led	White led	White led	White led	Red Led
Door opening	Drop-down	Drop-down	Drop-down	Lateral	Lateral	Lateral
Lighting on door opening (W)	Yes	Yes	Yes	Yes - 1,5	Yes - 1,5	Yes - 1,5
Diameter of the turntable (cm)/ Switchable turntable	36/Yes	36/Yes	36/Yes	31.5/Yes	31/Yes	31/Yes
Number of cooking functions	10	12	11	3	3	3
Fan assisted heat	Yes	Yes	-	-	-	-
Fanned Grill	Yes	Yes	-	-	-	-
Circulating heat (W)	1685	1600	_	-	-	<u>-</u>
Grill max. power (W)	1805	1750	-	1000	1000	1000
Timer (min)	60	60	60	95	95	95
Automatic cooking	Yes	Yes	Yes	Yes	Yes	Yes
Quattro System® (4 micro-wave outputs)	Yes	-	-	-	-	-
Defrosting	Yes	Yes	Yes	Yes	Yes	Yes
Reheat	-	-	Yes	-	-	-
Memories	-	Yes/3	-	-	-	-
ACCESSORIES SUPPLIES						
1 safety grid + 1 enamelled tray + Chrome-plated wire racks	Yes	Yes	-	-	-	-
SAFETY FEATURES						
Child lock: Electronic səfety	Yes	Yes	Yes	Yes	Yes	Yes
INSTALLATION	. 30			.30	.30	. 25
Power MO (W)	1000	1000	1000	900	900	900
Grill max. power (W)	1805	1750	-	1000	1000	1000
Voltage (V)/ Frequency (Hz) / Fuse (A)	220-240/50/16	220-240/50/16	220-240/50/10	230/50/10	230/50/10	230/50/10
Length of power supply cord (cm)	130	130	130	130	130	130
Built-in KIT	-	-	-	-	-	-
DIMENSIONS- WEIGHT						
Built-in HxWxD (mm)	450X560X550	450X560X550	450X560X550	380X560X500	380X560X500	380X560X500
Unboxed product HxWxD (mm)	456X592X622	456X592X622	456X592X622	388X595X400	388X595X400	388X595X400
Packed product HxWxD (mm)	550X670X700	550X670X700	550X670X700	466X653X500	466X653X500	466X653X500
Cavity HxWxD (mm)	226X420X410	226X420X410	226X420X410	206X368X328	206X328X368	206X368X328
Net weight (kg)/Gross weight (kg)	39.2/43.3	38.9/42.1	31.8/34.95	19/21	19/21	19/21
EAN CODE				2660767006442	2660767006274	2660767007407
Black Full black	3660767000222	3660767981591	3660767004504	3660767986442	3660767986374	3660767987487
White	3660767990333 3660767990340	3000707901391	3660767981584	3660767986459		
Inox	3660767990326	3660767981362		3660767986381	3660767986367	
		, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1,			2.2.2000,	

CHARTS TECHNICAL

MICROWAVES

	BUILT-IN GRILL	BUILT-IN SOLO	BUILT-IN SOLO	BUILT-IN SOLO	BUILT-IN SOLO
REFERENCES					
Black	BMG2508B	BMS7112B	BMS7120B	BMS5112X	
Full black					
White			BMS7120W		
Inox		BMS7112X	BMS7120X		BMS6112X
GENERAL FEATURES		1			
Volume (L)	20	26	26	17	17
Electronic programming	Yes	Yes	Yes	Yes	Yes
Control panel	knob	Touch sensitive	Touch sensitive	Buttons & Knob	Buttons & Knob
Cavity	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Display	White led	Red Led	White led	White led	White led
Door opening	Lateral	Lateral	Lateral	Lateral	Lateral
Lighting on door opening (W)	Yes	Yes	Yes	Yes	Yes
Diameter of the turntable (cm)/ Switchable turntable	24/Yes	30/Yes	30/Yes	24.5/No	24.5/No
Number of cooking functions	3	-	4	-	3
Fan assisted heat	-	-	-	-	-
Fanned Grill	-	-	-	-	-
Circulating heat (W)	-	-	-	-	-
Grill max. power (W)	1000	-	-	-	-
Timer (min)	95	60	60	95	95
Automatic cooking	Yes	Yes	Yes	-	Yes
Quattro System® (4 micro-wave outputs)	-	-	Yes	-	-
Defrosting	Yes	Yes	Yes	Yes	Yes
Reheat	-	-	-	-	-
Memories	-	-	-	-	-
ACCESSORIES SUPPLIES					
1 safety grid + 1 enamelled tray + Chrome-plated wire racks	-	-	-	-	-
SAFETY FEATURES					
Child lock: Electronic safety	Yes	Yes	Yes	Yes	Yes
INSTALLATION					
Power MO (W)	1250	900	900	800	800
Grill max. power (W)	1000	1550	1550	-	-
Voltage (V)/ Frequency (Hz) / Fuse (A)	230/50/6	220-240/50/10	220-240/50/10	230/50/10	230/50/10
Length of power supply cord (cm)	130	138	138	130	130
Built-in KIT	-	-	-	-	-
DIMENSIONS- WEIGHT					
Built-in HxWxD (mm)	380X560X550	380X560X550	380X560X550	380X560X310	380X560X300
Jnboxed product HxWxD (mm)	382X594X344		390X592X480	382X595X320	382X595X320
Packed product HxWxD (mm)	445X660X404	470X650X500	470X650X500	445X650X404	445X650X404
Cavity HxWxD (mm)		210X350X351,4	210X350X351,4	205X290X299	205X290X299
Net weight (kg)/Gross weight (kg)	15/17	18.8/20.9	20.68/22.68	14/16.18	14/16.18
EAN CODE					
Black	3660767986336	3660767989856	3660767976702	3660767966864	
Full black					
White			3660767978041 / 3660767982093		
nox		3660767989863	3660767976696		3660767955219

INDUCTION HOBS

Black	BPI384HUB	BPI364HSB		BPI264DB	BPI364DPB
nox					
White			BPI164HSW		BPI364DPW
GENERAL FEATURES	00		50	60	co
Width (cm) Hob type	80 Induction	60 Induction	60 Induction	60 Induction	60 Induction
Number of position(s) / burner	4	4	4	4	4
Keypad type: Touch-sensitive	Yes	Yes	Yes	Yes	Yes
buttons					
Vitroceramic glass surface POWER/DIAMETER OF ZONES	Glass ceramic	Glass ceramic	Glass ceramic	Glass ceramic	Glass ceramic
LEFT FREE ZONE	horiZone	horiZonetech	horiZonetech		DuoZone
Diameter (in mm)	400x230	400x230	400x230		370x180
Max power (booster in W)	3750	3750	3750		3750
Electrical energy Consumption (EC)					
(in Wh/kg)	193.4	184.3	184.3		192.6
RIGHT FREE ZONE	-	-	-	DuoZone	-
Diameter (in mm)				370x180	
Max power (booster in W)				3600	
Electrical energy Consumption (EC) (in Wh/kg)				182	
REAR LEFT	-	-	-	Induction	
Diameter (in mm)				210	
Max power (booster in W)				2600	
Electrical energy Consumption (EC)				196.3	
(in Wh/kg)					
FRONT LEFT	-	-	-	Induction	
Diameter (in mm) May nower (honeter in W)				160 1500	
Max power (booster in W) Electrical energy Consumption (EC)					
(in Wh/kg)				187.6	
CENTER LEFT	-	-	-	-	-
Diameter (in mm)					
Max power (booster in W)					
Electrical energy Consumption (EC)					
(in Wh/kg)					
CENTER Diameter (in mm)	Induction 280	-	-	-	-
Diameter (in mm) Max power (booster in W)	280 3750				
Electrical energy Consumption (EC)					
(in Wh/kg)	170.4				
CENTER RIGHT	-	-	-	-	-
Diameter (in mm)					
Max power (booster in W)					
Electrical energy Consumption (EC)					
(in Wh/kg) REAR RIGHT		Induction	Induction		Induction
Diameter (in mm)	-	210	210	-	210
Max power (booster in W)		3600	3600		3600
Electrical energy Consumption (EC)					
(in Wh/kg)		174.8	174.8		174.8
FRONT RIGHT	Induction	Induction	Induction	-	Induction
Diameter (in mm)	160	160	160		160
Max power (booster in W)	2500	2500	2500		2500
Electrical energy Consumption (EC) (in Wh/kg)	171.1	171.1	171.1		171.1
ADDITIONAL FEATURES					
Cooking positions	10	14	14	10	14
Number of timers 1 to 99 minutes	3	3	3	3	3
Booster	3	3	3	3	3
Direct access functions	Ultraboost / Boil / Recall	Piano / Clean lock	Piano / Clean lock	-	-
Ultraboost	Yes	Yes	Yes	Yes	Yes
Piano	- V	Yes	Yes	- -	-
Boil function Clean lock	Yes Yes	Yes Yes	Yes Yes	Yes	Yes Yes
Recall	Yes	-	-	-	-
SAFETY FEATURES	163		_	_	-
Pack 10 safeties :					
Antioverheating, Touchpad lock, Auto-stop, Anti-spill, Residual heat					
indicators, Cookware detection,	Yes	Yes	Yes	Yes	Yes
Little utensils detection, Low voltage detection, Bad connection detection,					
Over voltage detection					
INSTALLATION	1		ı		1
Total power (W)	7 400	7 400	7 400	7 400	7 400
Voltage (V)/ Frequency (Hz) / Fuse (A)	220-240/50/60/32	220-240/50/60/32	220-240/50/60/32	220-240/50/60/0	220-240/50/60/32
Length of power supply cord (cm)	130	130	130	120	130
DIMENSIONS- WEIGHT					
Built-in HxWxD (mm)	750X495	560X490	560X490	560X490	560X490
Unboxed product HxWxD (mm)	60X770X510	60X580X510	60X580X510	62X590X520	60X580X510
Packed product HxWxD (mm)	160X940X600	140X600X750	140X600X750	0.55.40.5	140X750X600
Net weight (kg)/Gross weight (kg) EAN CODE	13.35/14.25	10/12.04	10/12.04	8.57 / 9.8	10.12/10.8
	3660767982550	3660767989559		3660767993150	3660767020535
Black Inox	3660767982550	3660767989559		3660767993150	3660767989535

| 106 107|

INDUCTION HOBS INDUCTION HOBS

Black	BPI6428UB	BPI6427B	BPI3641SB		BPI365HSB
nox				BPI6440X	
White					BPI365HSW
GENERAL FEATURES					
Width (cm) Hob type	60 Induction	60 Induction	60 Induction	60 Induction	60 Induction
Number of position(s) / burner	4	4	4	4	4
Keypad type: Touch-sensitive	-				
buttons	Yes	Yes	Yes	Yes	Yes
Vitroceramic glass surface	Glass ceramic	Glass ceramic	Glass ceramic	Glass ceramic	Glass ceramic
POWER/DIAMETER OF ZONES					
LEFT FREE ZONE	DuoZone	DuoZone	-	-	horiZonetech
Diameter (in mm)	370x180	370x180			400x230
Max power (booster in W)	3600	3600			3750
Electrical energy Consumption (EC)	178.3	180.7			184,3
(in Wh/kg)	170.3	100.7			104,5
RIGHT FREE ZONE	-	-	-	-	-
Diameter (in mm)					
Max power (booster in W)					
Electrical energy Consumption (EC)					
(in Wh/kg)			to to all or	to to all or	
REAR LEFT	-	-	Induction	Induction	-
Diameter (in mm)			180	180	
Max power (booster in W)			3600	2800	
Electrical energy Consumption (EC) (in Wh/kg)			189.2	169.5	
FRONT LEFT	_	-	Induction	Induction	_
Diameter (in mm)			180	180	
Max power (booster in W)			3600	2800	
Electrical energy Consumption (EC)					
in Wh/kg)			189.2	169.5	
CENTER LEFT	-	-	-	-	-
Diameter (in mm)					
Max power (booster in W)					
Electrical energy Consumption (EC)					
in Wh/kg)					
CENTER	-	-	-	-	-
Diameter (in mm)					
Max power (booster in W)					
Electrical energy Consumption (EC)					
(in Wh/kg)					
CENTER RIGHT	-	-	-	-	-
Diameter (in mm)					
Max power (booster in W)					
Electrical energy Consumption (EC)					
(in Wh/kg)					
REAR RIGHT	Induction	Induction	Induction	Induction	Induction
Diameter (in mm)	210	210	210	210	210
Max power (booster in W)	3100	3100	3600	3100	3600
Electrical energy Consumption (EC) (in Wh/kg)	180	180	174.8	180	174.8
-	Industina	ladustica	ladustica	Industina	Industina
FRONT RIGHT Diameter (in mm)	Induction 160	Induction 160	Induction 160	Induction 160	Induction 160
Max power (booster in W)	2000	2000	2500	2000	2500
Electrical energy Consumption (EC)	2000	2000	2500	2000	2500
in Wh/kg)	164.2	164.2	175.4	199	171.1
ADDITIONAL FEATURES					
Cooking positions	10	10	14	10	14
Number of timers 1 to 99 minutes	3	3	4	4	3
Booster	3	3	4	4	3
Direct access functions	-	-	Clean lock	Timer / Mijotage / Boost	Boil / Clean lock / Gri
Ultraboost	-	-	Yes	-	Yes
Piano	-	-	-	-	-
Boil function	-	-	Yes	-	Yes
Clean lock	Yes	Yes	Yes	Yes	Yes
Recall	-	Yes	Yes	Yes	-
SAFETY FEATURES					
Pack 10 safeties :					
Intioverheating, Touchpad lock, Ruto-stop, Anti-spill, Residual heat ndicators, Cookware detection, Ittle utensils detection, Low voltage letection, Bad connection detection, liver voltage detection	Yes	Yes	Yes	Yes	Yes
INSTALLATION					
Total power (W)	7 200	7 200	7 400	7 200	7 400
Voltage (V)/ Frequency (Hz) /	220-240/50/60/32	220-240/50/60/32	220-240/50/60/32	220-240/50/60/32	220-240/50/60/32
Fuse (A)					
Length of power supply cord (cm) DIMENSIONS- WEIGHT	130	130	130	130	130
Built-in HxWxD (mm)	560X490	560X490	560X490	560X490	560X490
Jnboxed product HxWxD (mm)	60X580X510	59X580X510	60X580X510	60X580X510	60X580X510
Packed product HxWxD (mm)	140X750X600	145X750X560	140X750X600	140X750X600	140X750X600
Net weight (kg)/Gross weight (kg)	10.12/10.8	10.12/10.8	11.00/11.50	10.5/11	10 / 12.04
EAN CODE	.3.12/10.0	.0.12710.0	. 7.00/ 11.00	10.37 1 7	107 12.04
Black	3660767976245	3660767957763	3660767989573		3660767993778
	,0,0,0270				/0
nox				3660767957787	

REFERENCES Black	BPI3641PB	BPI1641UB	BPI6420B	BPI6464B	BPI2641B	BPI2638UB	BPI6362B
	DP1304 IPD	DP11041UD	DP1042UD	DP10404D	DP12041D	DPIZO30UB	DP10302D
nox							
White							
GENERAL FEATURES							ı
Width (cm)	60	60	60	60	60	60	60
Hob type	Induction	Induction	Induction	Induction	Induction	Induction	Induction
Number of position(s) / burner	4	4	4	4	4	3	3
Keypad type: Touch-sensitive	V	V	V	V	V	V	V
buttons	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Vitroceramic glass surface	Glass ceramic	Glass ceramic	Glass ceramic	Glass ceramic	Glass ceramic	Glass ceramic	Glass ceramic
POWER/DIAMETER OF ZONES							
LEFT FREE ZONE	_	_	_	_	_	_	_
Diameter (in mm)							
Max power (booster in W)							
Electrical energy Consumption (EC)							
(in Wh/kg)							
RIGHT FREE ZONE	-	-	-	-	-	-	-
Diameter (in mm)							
Max power (booster in W)							
Electrical energy Consumption (EC)							
(in Wh/kg)							
-	Industina	Industina	Induction	Industina	Industina	Induction	
REAR LEFT	Induction	Induction		Induction	Induction		-
Diameter (in mm)	180	180	180	180	210	160	
Max power (booster in W)	3600	3600	2800	2400	2300	2500	
Electrical energy Consumption (EC)	189.2	189.2	169.5	176.7	186,3	171.1	
(in Wh/kg)	105.2	103.2	103.3	170.7	100,3	17 1. (
FRONT LEFT	Induction	Induction	Induction	Induction	Induction	Induction	-
Diameter (in mm)	180	180	180	180	160	210	
Max power (booster in W)	3600	3600	2800	2400	1500	3600	
	3000	3000	2000	2400	1300	3000	
Electrical energy Consumption (EC)	189.2	189.2	169.5	176.7	186,3	174.8	
(in Wh/kg)							
CENTER LEFT	-	-	-	-	-	-	Induction
Diameter (in mm)							260
Max power (booster in W)							2400
Electrical energy Consumption (EC)							455.0
(in Wh/kg)							177.9
CENTER	_	_	-	_	_	-	-
Diameter (in mm)							
Max power (booster in W)							
Electrical energy Consumption (EC)							
(in Wh/kg)							
CENTER RIGHT	-	-	-	-	-	Induction	-
Diameter (in mm)						280	
Max power (booster in W)						3750	
Electrical energy Consumption (EC)							
(in Wh/kg)						170.4	
REAR RIGHT	Industina	Industina	Induction	Induction	Industina	_	ladustica
	Induction	Induction			Induction	-	Induction
Diameter (in mm)	210	210	210	210	180		160
Max power (booster in W)	3600	3600	3100	2400	1800		2200
Electrical energy Consumption (EC)	174.8	174.8	180	180.9	182		182.5
(in Wh/kg)	1/4.0	1/4.0	100	100.9	102		162.5
FRONT RIGHT	Induction	Induction	Induction	Induction	Induction	-	Induction
Diameter (in mm)	160	160	160	160	180		180
Max power (booster in W)	2500	2500	2000	2200	1800		2400
	2500	2500	2000	2200	1600		2400
Electrical energy Consumption (EC)	175.4	175.4	199	180.8	196,3		176.7
(in Wh/kg)							
ADDITIONAL FEATURES							ı
Cooking positions	14	10	10	10	10	10	10
Number of timers 1 to 99 minutes	4	4	4	4	4	3	3
Booster	4	4	4	4	4	3	3
		Recall + Ultraboost on					
Direct access functions	-	each burner + Clean lock	-	-	-	-	-
Ultraboost	Voc	Sicon lock	-	-	_	Yes	_
	Yes	Voc	-	-	_		
Piano	-	Yes	-		-	Yes	-
Boil function	Yes	-	-	-	-	-	-
Clean lock	Yes	Yes	Yes	Yes	Yes	-	Yes
Recəll	Yes	Yes	Yes	-	-	-	-
SAFETY FEATURES							
Pack 10 safeties :							
Antioverheating, Touchpad lock,							
Auto-stop, Anti-spill, Residual heat indicators, Cookware detection,	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Little utensils detection, Low voltage	163	163	163	163	163	163	163
detection, Bad connection detection,							
Over voltage detection							
INSTALLATION							
Total power (W)	7 400	7 400	7 200	7 200	7 200	7 400	5 900
Voltage (V)/ Frequency (Hz) /							
Fuse (A)	220-240/50/60/32	220-240/50/60/32	220-240/50/60/32	220-240/50/60/32	220-240/50/60/	220-240/50/60/32	220-240/50/60/3
Length of power supply cord (cm)	130	130	130	130	120	130	130
DIMENSIONS- WEIGHT							
Built-in HxWxD (mm)	560X490	560X490	560X490	560X490		560X490	560X490
Unboxed product HxWxD (mm)	60X580X510	60X580X510	60X580X510	66X590X520	62X590X520	60X580X510	66X590X520
Dackad acadust HolklyD ()	140X750X600	140X750X560	140X750X600	140X750X600	115X690X645	140X750X600	140X750X600
Packed product HxWxD (mm)	10 12/10 0	10.12/10.8	10.12 /10.8	6.0 / 7.0	8.57 / 9.8	10.1/11	6.0 /7.0
Net weight (kg)/Gross weight (kg)	10.12/10.8	10:12/10:0					
Net weight (kg)/Gross weight (kg) EAN CODE	10.12/10.8	10.12710.0					
Net weight (kg)/Gross weight (kg)	3660767982666	3660767982567	3660767963344	3660767971196	3660767993105	3660767984882	3660767971516
Net weight (kg)/Gross weight (kg) EAN CODE				3660767971196	3660767993105	3660767984882	3660767971516

INDUCTION DOMINO HOBS

REFERENCES		
Black	BPI1621UB	BPI6210B
GENERAL FEATURES		
Width (cm)	30	30
Hob type	Induction	Induction
Number of position(s) / burner	2	2
Keypad type: Touch-sensitive buttons	Yes	Yes
Vitroceramic glass surface	Glass ceramic	Glass ceramic
POWER/DIAMETER OF ZONES	Oldas cerdifile	Old35 CCI diffic
REAR LEFT		
	-	-
Diameter (in mm)		
Max power (booster in W) Electrical energy Consumption (EC) (in Wh/kg)		
FRONT LEFT	-	-
Diameter (in mm)		
Max power (booster in W)		
Electrical energy Consumption (EC) (in Wh/kg)		
REAR RIGHT	Induction	Induction
Diameter (in mm)	210	180
Max power (booster in W)	3600	2800
Electrical energy Consumption (EC) (in Wh/kg)	174.8	169.5
FRONT RIGHT	Induction	Induction
Diameter (in mm)	160	180
Max power (booster in W)	2500	2800
Electrical energy Consumption (EC) (in Wh/kg)	171.1	169.5
ADDITIONAL FEATURES		
Cooking positions	10	10
Number of timers 1 to 99 minutes	2	2
Booster	2	2
Direct access functions	Yes	-
Ultraboost	Yes	-
Clean lock	Yes	Yes
SAFETY FEATURES		
Pack 10 safeties : Antioverheating, Touchpad lock, Auto-stop, Anti-spill, Residual heat indicators, Cookware detection, Little utensils detection, Low voltage detection, Bad connection detection, Over voltage detection	Yes	Yes
INSTALLATION		
Total power (W)	3 700	3 600
Voltage (V)/ Frequency (Hz) /Fuse (A)	220-240/50/60/16	220-240/50/60/16
Length of power supply cord (cm)	120	130
DIMENSIONS- WEIGHT		
Built-in HxWxD (mm)	265X490	265X490
Unboxed product HxWxD (mm)	60X288X510	59X288X510
Packed product HxWxD (mm)	175X395X595	175X395X595
Net weight (kg)/Gross weight (kg)	5.6 /6.05	5.5 /7.5
EAN CODE		

MIXED INDUCTION/GAZ HOB

REFERENCES	DDIC 44 4DM
Black	BPI6414BM
GENERAL FEATURES	CO
Width (cm)	60
Hob type	Mixed (Induction + Gas)
Number of position(s) / burner	2+2
Keypad type: Touch-sensitive buttons	Touch-sensitive buttons + Kno
Vitroceramic glass surface	Glass ceramic
POWER/DIAMETER OF ZONES	
REAR LEFT	Gas
Diameter (in mm)	Very-rapid
Max power (booster in W)	3100
Electrical energy Consumption (EC) (in Wh/kg)	-
FRONT LEFT	Induction
Diameter (in mm)	180
Max power (booster in W)	2800
•	
Electrical energy Consumption (EC) (in Wh/kg)	193.9
REAR RIGHT	Gas
Diameter (in mm)	Semi-rapid
Max power (booster in W)	1,500
Electrical energy Consumption (EC) (in Wh/kg)	-
FRONT RIGHT	Induction
Diameter (in mm)	180
Max power (booster in W)	2800
Electrical energy Consumption (EC) (in Wh/kg)	194.9
ADDITIONAL FEATURES	
Cooking positions	9 (induction)
Timer	Timer selection on
	the 2 induction burners
Booster	2 (induction)
Features	Cast iron grid mono-one
SAFETY FEATURES	
Pack 10 safeties : Antioverheating, Touchpad lock, Auto-stop, Anti-spill, Residual heat indicators, Cookware detection, Little utensils detection, Low voltage detection, Bad connection detection, Over voltage detection	Yes
Gas - Thermocouple safety	Yes
INSTALLATION	
Total power (W)	Induction 3400 - Gas 4600
Voltage (V)/ Frequency (Hz) /Fuse (A)	220-240/50/16
Length of power supply cord (cm)	93
Butane / natural gas connection	No/Yes
Injectors provided in butane / natural gas	Yes/No
DIMENSIONS- WEIGHT	
Built-in HxWxD (mm)	560X490
Unboxed product HxWxD (mm)	580 x 510
Packed product HxWxD (mm)	170X700X600
Net weight (kg)/Gross weight (kg)	10.5 / 12
EAN CODE	
Black	3660767954250

VITROCERAMIC HOBS

REFERENCES						
Black	BPV1641B	BPV2421B	BPV6420B	BPV6410B	BPV6320B	BPV2320B
GENERAL FEATURES						
Width (cm)	60	60	60	60	60	60
Hob type	Ceramic	Ceramic	Ceramic	Ceramic	Ceramic	Ceramic
Number of position(s) / burner	4	4	4	4	3	3
Keypad type	Touch-sensitive buttons	Touch-sensitive buttons	Touch-sensitive buttons	Knobs	Buttons	Buttons
/itroceramic glass surface	Glass ceramic	Glass ceramic	Glass ceramic	Glass ceramic	Glass ceramic	Glass ceramic
POWER/DIAMETER OF ZONES						
REAR LEFT	Radiant	Radiant	Radiant	Radiant	Radiant	Radiant
Diameter (in mm)	210	230	165	165	165	165
Max power (booster in W)	2,100	2,200	1,200	1,200	1,200	1,200
Electrical energy Consumption (EC) in Wh/kg)	187,3				181,3	181.3
RONT LEFT	Radiant	Radiant	Radiant	Radiant	Radiant	Radiant
Diameter (in mm)	145	165	200	200	200	200
Max power (booster in W)	1,200	1,200	1,800	1,800	1,800	1,800
Electrical energy Consumption (EC) in Wh/kg)	189.3	,	,,,,,	,	187,4	187.4
CENTER RIGHT					Radiant	Radiant
Diameter (in mm)					230	230
Max power (booster in W)					2.300	2.100
Electrical energy Consumption (EC) in Wh/kg)					190,1	190.1
REAR RIGHT	Radiant	Radiant	Radiant	Radiant		
Diameter (in mm)	180	200	200	200		
Max power (booster in W)	1.800	1.800	1.800	1.800		
Electrical energy Consumption (EC) (in Wh/kg)	190	1,555	1,000	,,555		
FRONT RIGHT	Radiant	Radiant	Radiant	Radiant		
Diameter (in mm)	145	165	165	165		
Max power (booster in W)	1.200	1.200	1,200	2.000		
Electrical energy Consumption (EC)	189.3	1,200	6000	2,000		
ADDITIONAL FEATURES						
Cooking positions	9	9	9	9	9	9
Number of timers 1 to 99 minutes	4	4	4	4	3	3
Clean lock	Yes	Yes	Yes	·	Yes	Yes
SAFETY FEATURES						
Safety devices	Yes	Pack 5 securities	Pack 5 securities	Pack 5 securities	Pack 5 securities	Pack 5 securities
INSTALLATION						
otal power (W)	6 300	6 300	6 000	6 000	5 300	5 100
/oltage (V)/ Frequency (Hz) / Fuse (A)	220-240/50/60/32	220-240/50/60/26	220-240/50-60/32	220-240/50/60/32	220-240/50/60/32	220-240/50/60/21
ength of power supply cord (cm)	109	109	120	120	120	109
DIMENSIONS- WEIGHT						
Built-in HxWxD (mm)	560X490	560X490	560X490	560X490	560X490	560X490
Inboxed product HxWxD (mm)	45X600X510	63X600X510	51X580X510	75X590X510	55X580X510	63X600X510
Packed product HxWxD (mm)	90X635X545	90X635X545	115X690X645	115X690X645	115X690X645	90X635X545
Net weight (kg)/Gross weight (kg)	7.5/8.5	7.5/8.5	9/10.2	8.6/9.8	8.7/9.9	7.5/8.5
EAN CODE						
Black	3660767983342	3660767988736	3660767958951	3660767958944	3660767958920	3660767988712

VITROCERAMIC DOMINO HOBS

Black	BPV6210B	BPV6222B
GENERAL FEATURES		
Width (cm)	30	30
Hob tupe	Ceramic	Ceramic
Number of position(s) / burner	2	2
Keypad type	Knobs	Buttons
Vitroceramic glass surface	Glass ceramic	Glass ceramic
POWER/DIAMETER OF ZONES		
REAR LEFT		
Diameter (in mm)		
Max power (booster in W)		
Electrical energy Consumption (EC) (in Wh/kg)		
FRONT LEFT		
Diameter (in mm)		
Max power (booster in W)		
Electrical energy Consumption (EC) (in Wh/kg)		
CENTER RIGHT		
Diameter (in mm)		
Max power (booster in W)		
Electrical energy Consumption (EC) (in Wh/kg)		
REAR RIGHT	Radiant	Radiant
Diameter (in mm)	165	165
Max power (booster in W)	1,200	1,200
Electrical energy Consumption (EC) (in Wh/kg)	176.4	177.4
FRONT RIGHT	Radiant	Radiant
Diameter (in mm)	200	200
Max power (booster in W)	1,8	1,8
Electrical energy Consumption (EC) (in Wh/kg)	181.6	182
ADDITIONAL FEATURES		
Cooking positions	9	9
Number of timers 1 to 99 minutes	2	2
Clean lock	No	Yes
SAFETY FEATURES		
Safety devices	-	Pack 5 securities
INSTALLATION		
Total power (W)	3 000	3 000
Voltage (V)/ Frequency (Hz) / Fuse (A)	220-240/50/60/16	220-240/50/60/1
Length of power supply cord (cm)	180	180
DIMENSIONS- WEIGHT		
Built-in HxWxD (mm)	268X490	268X490
Unboxed product HxWxD (mm)	87X288X510	55X288X550
Packed product HxWxD (mm)	142X392X610	142X392X610
Net weight (kg)/Gross weight (kg)	4.5/5.8	4.7/6
EAN CODE		
Black	3660767958906	3660767976221

GLASS HOBS

REFERENCES					
Black	BPG6413BM	BPG3400BM	BPG6414B	BPG6413B	BPG3200B
Inox					
White				BPG6413W	
GENERAL FEATURES					
Width (cm)	60	60	60	60	30
Hob type	Mixed gas / electrical	Mixed gas / electrical	Gas	Gas	Gas
Number of position(s) / burner	3+1	3+1	4	4	2
Keypad type	Knob	Knob	Knob	Knob	Knob
Surface type	Tempered glass	Tempered glass	Tempered glass	Tempered glass	Tempered glass
POWER/DIAMETER OF ZONES					
REAR LEFT	Electrical	Electrical	Gas	Gas	-
Diameter (in mm)	145	145	Semi-rapid	Semi-rapid	
Max power (booster in W)	1,500	1,500	1,500	1,500	
Electrical energy consumption (EC) in Wh/kg	206	194,5	TBC	TBC	
FRONT LEFT	Gas	Gas	Gas	Gas	-
Diameter (in mm)	Very-rapid	Rapid	Very-rapid	Very-rapid	
Max power (booster in W)	3,100	2,800	3,100	3,100	
Electrical energy consumption (EC) in Wh/kg	TBC	55,1	TBC	TBC	
REAR RIGHT	Gas	Gas	Gas	Gas	Gas
Diameter (in mm)	Rapid	Semi-rapid	Rapid	Rapid	Rapid
Max power (booster in W)	2,250	1,750	2,250	2,250	2,800
Electrical energy consumption (EC) in Wh/kg	TBC	55,1	TBC	TBC	55,1
FRONT RIGHT	Gas	Gas	Gas	Gas	Gas
Diameter (in mm)	Auxiliary	Auxiliary	Auxiliary	Auxiliary	Auxiliary
Max power (booster in W)	850	1,000	850	850	1000
Electrical energy consumption (EC) in Wh/kg	TBC	55,1	TBC	TBC	55,1
SAFETY FEATURES					
Safety devices	Yes	Yes	Yes	Yes	Yes
INSTALLATION					
Total power (W)	6,200/1,500	5,550/1,500	7,700	7,700	3,800
Voltage (V)/ Frequency (Hz) /Fuse (A)	220-240/50/10	220-240/50/10	220-240/50/10	220-240/50/10	220-240/50-60/10
Length of power supply cord (cm)	150		93	93	120
DIMENSIONS- WEIGHT					
Built-in HxWxD (mm)	560X480	560X480	560X480	560X480	270X490
Unboxed product HxWxD (mm)	101X580X510	110X600X510	100X600X520	101X580X510	110X300X510
Packed product HxWxD (mm)	165X695X595	145X665X568	180X860X600	165X695X595	148X375X575
Net weight (kg)/Gross weight (kg)	10/11	10.8/12.4	10/11	10/11	6,3 / 7,3
EAN CODE					
Black	3660767954359	3660767992085	3660767954755	3660767954335	3660767992054
Inox					
White				3660767954342	

ENAMELLED HOBS

Black	BPE6410B	BPE3410B	BPE3411BM
Inox	BPE6410X	BPE3410X	BPE3411XM
White	BPE6410W	BPE3410W	BPE3411WM
GENERAL FEATURES	5, 20, 1011	2. 20 . 10	2. 20
Width (cm)	60	60	60
Hob type	Gas	Gas	Mixed gas / electrical
Number of position(s) / burner	4	4	3+1
Кеураd type	Knob	Knob	Knob
Surface type	Tempered glass	Enamelled	Enamelled
POWER/DIAMETER OF ZONES			
REAR LEFT	Gas	Gas	Electrical
Diameter (in mm)	Semi-rapid	Semi-rapid	145
Max power (booster in W)	1,500	1,750	1,500
Electrical energy consumption (EC) in Wh/kg	TBC	55,1	194,5
FRONT LEFT	Gas	Gas	Gas
Diameter (in mm)	Very-rapid	Rapid	Rapid
Max power (booster in W)	3,150	2,800	2,800
Electrical energy consumption (EC) in Wh/kg	TBC	55,1	55,1
REAR RIGHT	Gas	Gas	Gas
Diameter (in mm)	Rapid	Semi-rapid	Semi-rapid
Max power (booster in W)	2,300	1,750	1,750
Electrical energy consumption (EC) in Wh/kg	TBC	55,1	55,1
FRONT RIGHT	Gas	Gas	Gas
Diameter (in mm)	Auxiliary	Auxiliary	Auxiliary
Max power (booster in W)	850	1.000	1,000
Electrical energy consumption (EC) in Wh/kg	TBC	55,1	55,1
SAFETY FEATURES			
Safety devices	Yes	Yes	Yes
INSTALLATION			
Total power (W)	7,800	7,300	5.55/1.5
Voltage (V)/ Frequency (Hz) /Fuse (A)	220-240/50/10	220-240/50-60/10	220-240/50-60/1
Length of power supply cord (cm)	100	100	
DIMENSIONS- WEIGHT			
Built-in HxWxD (mm)	560X490	560X480	560X480
Unboxed product HxWxD (mm)		80X580X500	80X580X500
Packed product HxWxD (mm)	140X620X580	140X620X580	115X655X550
Net weight (kg)/Gross weight (kg)	6.96 / 8	7.2/7	7.9/8.7
EAN CODE			
Black	3660767954380	3660767992115	3660767992177
Inox	3660767954397	3660767992092	3660767992139
White	3660767954366	3660767992108	3660767992146

H00DS H00DS

REFERENCES	ISLAND	ISLAND	ISLAND	PERIPHERAL	PERIPHERAL
Black	BHY2353B	BHI2353G		BHV2673XB	
Inox			BHI1043X		BHV6801X
GENERAL FEATURES					
Width (cm)	38	38	49	60	80
Annual Energy Consumption (AEC hood)	31,8	16,5	59,8	34,5	52,5
Energy efficiency class	A+	A+	В	A+	А
Energy Efficiency Index (EEI) (kWh)	44,3	41	59	40,8	52,3
Growth Factor in time (f)	0,8	0,9	0,9	0,7	0,9
Fluid dynamic efficiency (FDE)	32	31	29,3	35,6	29,9
Fluid dynamic efficiency class	A	A	Δ	A	23,3 A
Light efficiency of the model	A	A	В	A	В
-					
Light efficiency class of the model (Lux)	272	240	422	300	111
Grease filtration efficiency (%)	57	58	75,1	61	70,2
Grease filtration efficiency class	E	E	С	E	D
Airflow to the minimum speed/Max* in normal operation	150/450	100/290	265/640	220/555	221/308
Airflow in intensive or 'boost' mode***	620	470	-	740	726
Accoustic emissions of air weighted of the value A, the minium/maximum speed available, in normal operation** (dB(A))	43/63	37/58	45/68	44/64	48/56
Accoustic emissions of air Weighted value A, to the intensive or 'boost' speed (dB(A))	69	67	-	70	74
Power consumed in standby mode (W)	0.45	0.45	0.49	0.45	0
Air pressure measured at maximum efficiency point (Pa)	421	322	420	446	461
Electrical power at BEP input (W)	98.8	41.2	135.5	120.9	150.4
· ·					3
Total power of the lamps (W)	4	4	5	5	
Total luminance (Lux)	4	240	422	300	111
ADDITIONAL FEATURES	Electronia controla	Electronia acetrola	Electronia acetrola	Caraiti a alastarai a aratarla	Electronia controla
Control type	Electronic controls with backlit buttons	Electronic controls with backlit buttons	Electronic controls with backlit buttons	Sensitive electronic controls with backlit buttons	Electronic controls with backlit buttons
Number of motors/fans	1/1	1/1	1/1	1/1	1/1
Number of speed positions	4	4	3	4	3
Type of light	LED spots	LED spots	LED spots	adjustable leds	LED spots
Power per light (W)	1	1	2,5	2,5	1,5
Motor power (W)	160	160	200	160	320
ndependent lighting	Yes	Yes	-	-	-
On/Off	Yes	Yes	-	-	-
Speed	Yes	Yes	Yes	-	Yes
Light	-	-	Yes	Yes	Yes
Mood Lighting	-	_	Yes	-	-
Delayed stop	_	_	_	_	Yes
	Chairless short	Chairlean shool	Chairless shoot	Alicentations	
Type of grease filter	Stainless steel	Stainless steel	Stainless steel	Aluminium	Aluminium
No-return valve	Yes	-	-	Yes	-
Deflector	-	-	-	-	-
ACCESSORIES			.,		
nox splashback	-	-	Yes	No	Yes
lnox chimney extension	Black - Yes	No	No	Black - Yes	Black - Yes (not included
Charcoal filters delivered by series	No	No	Yes	No	Yes
Charcoal filters reference	FWK228	FWK228	AFC-31	FWND-185	FWAS
Grease filter	1	0	1	2	1
Filter-cassette	0	1	0	0	0
Wall installation kit	Yes	Yes	Yes	Yes	Yes
INSTALLATION					
Air vented mode	Recycling	Recycling	Recycling	Recycling or extracting air	Recycling or extracting a
Delivered in	Recycling air	Recycling air	Recycling air	Recycling air	Recycling air
Voltage (V)/ Frequency (Hz) /Fuse (A)	220-240/50/60/1.17	220-240/50/60/0.86	220-240/50/10	220-240/50-60/1.16	220-240/50/1.4
Length of electrical supply cord (cm)	200	260		200	150
DIMENSIONS- WEIGHT	230	230		230	130
Jnboxed product HxWxD (mm)	958X390X390	300X400X400	360X492X485	390X600X395	360X800X430
Packed product HxWxD (mm)	840x890x470	450X450X400	654X600X600	500x700x500	515x865x470
Net weight (kg)/Gross weight (kg)	18.9/22.3	11.2/13.7	10/13.85	13.4/16.3	12.3/16.7
EAN CODE Black	3660767007250	3660767007241		3660767007365	3660767976054
Vhite	3660767987258	3660767987241		3660767987265	3000/0/9/0034

	PERIPHERAL	PERIPHERAL	CURVED
REFERENCES Black	BHV1974IB	BHV1674IB	
Inox	DRV 1974ID	DRV 10741D	AD1046X
GENERAL FEATURES			
Width (cm)	90	60	60
Annual Energy Consumption (AEC hood)	26,1	24,3	91
Energy efficiency class	A+	Α	С
Energy Efficiency Index (EEI) (kWh)	42,6	45,6	81,4
Growth Factor in time (f)	0,8	0,9	1,4
Fluid dynamic efficiency (FDE)	32,8	31,6	17,9
Fluid dynamic efficiency class	A R	A	D R
Light efficiency of the model	106	A	121
Light efficiency class of the model (Lux)	49	175 45,6	76
Grease filtration efficiency (%) Grease filtration efficiency class	49 F	45,6 F	76 C
Airflow to the minimum speed/Max* in		•	-
normal operation	188/543	172/472	224/603
Airflow in intensive or 'boost' mode***	-	-	-
Accoustic emissions of air weighted of the value A, the minium/maximum speed available, in normal operation** (dB(A))	42/62	41/61	42/64
Accoustic emissions of air Weighted value A, to the intensive or 'boost' speed (dB(A))	-	-	-
Power consumed in standby mode (W)	0.36	0.37	-
Air pressure measured at maximum efficiency point (Pa)	315	345	297
Electrical power at BEP input (W)	79.8	65.2	169.5
Total power of the lamps (W)	3	3	6
Total luminance (Lux)	106	175	121
ADDITIONAL FEATURES	Electronic controls	Electronic controls	Mechanical controls
Control type Number of motors/fans	with display	with display	with buttons
Number of speed positions	3	3	3
Type of light	LED spots	LED spots	LED bulbs
Power per light (W)	1,5	1,5	3
Motor power (W)	78	78	180
Independent lighting	-	-	-
On/Off	-	-	Yes
Speed	-	Yes	Yes
Light	-	Yes	Yes
Mood Lighting	-	-	-
Delayed stop	-	Yes	-
Type of grease filter	Aluminium	Aluminium	Aluminium
No-return valve	-	Yes	Yes
Deflector	-	-	Yes
ACCESSORIES			
Inox splashback	-	-	Yes
Inox chimney extension	Yes (not included)	Yes (not included)	-
Charcoal filters delivered by series	Yes	Yes	Yes
Charcoal filters reference	CF115	CF115	AFC-29
Grease filter	1	1	2
Filter-cassette Wall installation kit	0 Voc	0 Vos	0 Vos
INSTALLATION	Yes	Yes	Yes
Air vented mode	Recycling or extracting air	Recycling or extracting air	Recycling or extracting air
Delivered in	Recycling air	Recycling air	Recycling air
Voltage (V)/ Frequency (Hz) /Fuse (A)	220-240/50/0.35	220-240/50/0.35	220-240/50/10
Length of electrical supply cord (cm)	150	150	90
DIMENSIONS- WEIGHT			
Unboxed product HxWxD (mm)	390X900X394	390X600X394	298X598X500
Packed product HxWxD (mm)	465X935X460	465X635X460	615X760X390
Net weight (kg)/Gross weight (kg)	19/22	14/16.5	10/11.3
EAN CODE Black	3660767984080	3660767984073	
	3000/0/984080	3000/0/9840/3	
White			

HOODS

	BOX PLUG AND PLAY	BOX PLUG AND PLAY	вох
REFERENCES			
Black			
Inox	BHB6902X	BHB6602X	AD1516X
GENERAL FEATURES	00		
Width (cm)	90	60	60
Annual Energy Consumption (AEC hood)	57,5	56,8	51,1
Energy efficiency class	В	В	В
Energy Efficiency Index (EEI) (kWh)	62,3	62,2	56,7
Growth Factor in time (f)	1,1	1,1	1
Fluid dynamic efficiency (FDE)	23,7	24,8	27
Fluid dynamic efficiency class	В	В	В
Light efficiency of the model	А	Α	Α
Light efficiency class of the model (Lux)	161	203	183
Grease filtration efficiency (%)	81,5	82,7	81
Grease filtration efficiency class	C.	C.	C.
-	C	C	C
Airflow to the minimum speed/Max* in normal operation	359/606	352/593	362/611
Airflow in intensive or 'boost' mode***	-	-	-
Accoustic emissions of air weighted of the value A, the minium/maximum speed available, in normal operation** (dB(A))	59/70	58/68	59/69
Accoustic emissions of air Weighted value A, to the intensive or 'boost' speed (dB(A))	-	-	-
Power consumed in standby mode (W)	0	0	-
Air pressure measured at maximum			
efficiency point (Pa)	344	364	377
Electrical power at BEP input (W)	136	134.2	132
Total power of the lamps (W)	4	4	4
Total luminance (Lux)	161	203	183
ADDITIONAL FEATURES	10.1	203	103
Control type	Mechanical controls with buttons	Mechanical controls with buttons	Mechanical controls with buttons
Number of motors/fans	1/1	1/1	1/1
	3		3
Number of speed positions		3	
Type of light	LED spots	LED spots	LED spots
Power per light (W)	2	2	2
Motor power (W)	190	190	190
Independent lighting	Yes	Yes	Yes
On/Off	Yes	Yes	Yes
Speed	Yes	Yes	Yes
Light	_	-	-
Mood Lighting	-	_	-
Delayed stop			
	-	-	-
Type of grease filter	-	-	-
No-return valve	Yes	Yes	Yes
Deflector	Yes	Yes	Yes
ACCESSORIES			
lnox splashback	Yes	Yes	Yes
Inox chimney extension	Yes	Yes	Yes
Charcoal filters delivered by series	Yes	Yes	Yes
Charcoal filters reference	FWAS	FWAS	FWAS
Grease filter	0	0	0
Filter-cassette	2 metal	2 metal	2 metal
Wall installation kit	Yes	Yes	Yes
INSTALLATION			163
Air vented mode	Recycling or extracting air	Recycling or extracting air	Recycling or extracting a
Delivered in			Recycling air
	Recycling air	Recycling air	
Voltage (V)/ Frequency (Hz) /Fuse (A)	220-240/50/	220-240/50/	220-240/50/
Length of electrical supply cord (cm)	182	182	180
DIMENSIONS- WEIGHT	2007/2007/22	20070007===	00//00//
Unboxed product HxWxD (mm)	300X900X500	300X600X500	80X600X500
Packed product HxWxD (mm)	560X955X440	560X660X440	560X735X410
Net weight (kg)/Gross weight (kg)	17.5/20	16/18	14.5/17
EAN CODE			
Black			
White			
Inox	3660767958890	3660767958883	3660767940192

REFERENCES	CANOPY	CANOPY	TELESCOPIC	TELESCOPIC	TELESCOPIC
Black	BHG2552B				BHT2611B
lnox		BHG1522X	AT1349X	AT1346X	
GENERAL FEATURES					
Width (cm)	54	52	90	60	60
Annual Energy Consumption (AEC hood)	63,8	44,7	65,7	65,7	61,3
Energy efficiency class	В	В	D	D	С
Energy Efficiency Index (EEI) (kWh)	64,4	69	86	86	84,9
Growth Factor in time (f)	1,1	1,3	1,6	1,6	1,6
Fluid dynamic efficiency (FDE)	24,5	18,1	11,8	11,8	11,9
Fluid dynamic efficiency class	В	С	E	E	E
Light efficiency of the model	Α	D	E	D	Α
Light efficiency class of the model (Lux)	512	100	73	73	73
Grease filtration efficiency (%)	59	75	76	76	65,5
Grease filtration efficiency class	E	С	С	С	D
Airflow to the minimum speed/Max*	050/400	400/000	0.40/00.4	0.40/00.4	400/405
in normal operation	250/430	180/390	240/384	240/384	180/405
Airflow in intensive or 'boost' mode***	640	-	-	-	-
Accoustic emissions of air weighted of the value A, the minium/maximum speed available, in normal operation** (dB(A))	51/61	54/70	60/71	60/71	51/66
Accoustic emissions of air Weighted value A, to the intensive or 'boost' speed (dB(A))	70	-	-	-	-
Power consumed in standby mode (W)	0.45	-	-	-	0.45
Air pressure measured at maximum	386	245	316	199	187
efficiency point (Pa)					
Electrical power at BEP input (W)	144.4	82	105	105	97.4
Total power of the lamps (W)	8	8	6	6	3.4
Total luminance (Lux)	8				180
ADDITIONAL FEATURES					
Control type	Electronic controls with display	Mechanical controls with slider	Mechanical controls with buttons	Mechanical controls with buttons	Sensitive electronic cor
Number of motors/fans	1/1	1/1	1/1	1/1	1/1
Number of speed positions	3	3	3	3	3
Type of light	LED stripes	LED stripes	LED bulbs	LED bulbs	LED stripes
	4	LED stripes	3	3	1.7
Power per light (W)					
Motor power (W)	260	110	130	130	120
ndependent lighting	Yes	Yes		-	-
On/Off	Yes	Yes	Yes	Yes	Yes
Speed	Yes	Yes	Yes	Yes	Yes
Light	-	-	Yes	Yes	Yes
Mood Lighting	-	-	-	-	-
Delayed stop	-	-	-	-	-
Type of grease filter	Aluminium	Aluminium	-	Aluminium	-
No-return valve	Yes	Yes	No	Yes	Yes
Deflector	No	No	No	No	No
ACCESSORIES					
nox splashback	No	Yes	Yes	Yes	No
nox chimney extension	No	No	No	No	No
Charcoal filters delivered by series	No	Yes	Yes	Yes	No
Charcoal filters reference	FWND-185	AH6501	AFC-36	AFC-36	FWND-185
Grease filter	2	2	0	2	2
Filter-cassette	0	0	2 aluminium	0	0
Wall installation kit	Yes	Yes	Yes	Yes	Yes
INSTALLATION					
Air vented mode	Recycling or extracting air	Recycling or extracting air	Recycling or extracting air	Recycling or extracting air	Recycling or extracting
Delivered in	Recycling air	Recycling air	Air extraction	Air extraction	Air extraction
/oltage (V)/ Frequency (Hz) /Fuse (A)	220-240/50/60/0.98	220-240/50/16	220-240/50/60/10	230/50/60/16	220-240/50/60/0.9
ength of electrical supply cord (cm)	200	150	150	130	200
DIMENSIONS- WEIGHT					
Jnboxed product HxWxD (mm)	260x540x285	174X522X284	180X900X300	180X600X300	270X599X319
Packed product HxWxD (mm)	355x590x360	305X605X370	260X940X330	260X640X330	350x700x380
Net weight (kg)/Gross weight (kg)	8.9/10.1	4.4/5.4	8/8.46	6/8.48	8.6/10.7
EAN CODE					
Black					3660767985070
White					
Inox	3660767985049	3660767984752	3660767201118	3660767203563	

FULL BUILT-IN DISHWASHERS

DEFEDENCES	60CM	60CM	60CM	60CM	60CM
REFERENCES	BKDD435 IS	PD I424VI P	BDJ424LB	DD 144CLC	DD 1424DD
Black nox	BKDD435J2	BDJ424VLB	BUJ424LB	BDJ44SLS	BDJ424DB
White					
GENERAL FEATURES					
Place settings number	14	14	14	14	14
inergy efficiency class	D	D	D	D	D
Energy consumption 100 cycles					
kWh/100 cycles)	85	85	85	85	85
Energy consumption per cycle (kWh)	0.849	0.849	0.849	0.849	0.849
Energy consumption in mode : stop (W)	0.49	0.49	0.49	0.49	0.49
Nater consumption per cycle L/cycle)	10	10	10	11	11
Duration of program (min)	198	198	198	198	198
Noise emission (dB(A))	45	44	44	44	44
ADDITIONAL FEATURES					
Delayed start	12	12	12	24	24
Remaining time	No	No	No	Yes	Yes
Orying mode	Auto open door				
PROGRAMMES					
Programmes number / Washing	6/4	644	6/1	B	211
temperatures	6/4	6/4	6/4	7/4	6/4
Jniversal	-	-	-	Yes	-
90 min - 65°C Rapid 30 min	- V	- V	- V	Yes	- V
Rapio 30 min Eco	Yes Yes	Yes Yes	Yes Yes	Yes Yes	Yes Yes
Auto	Yes	Yes	Yes	Yes	Yes
OptiA 60 min	Yes	-	Yes	-	Yes
Glasses - 40°C	Yes	Yes	Yes	Yes	Yes
Soaking	-	-	-	Yes	-
Prewash	-	-	-	Yes	-
Vortex wash system 60 min	-	Yes	-	-	-
Quick wash	-	=	-	Yes	-
ntensive - 60°C	Yes	Yes	Yes	Yes	Yes
USER COMFORT					
Electronic type	Leds	Leds	Leds	Leds	Digits
1/2 load function	Yes	Yes	Yes	Yes	Yes
Adjustable upper basket	Yes	Yes	Yes	Yes	Yes
Adjustable lower basket	Yes	Yes	Yes	Yes	Yes
Salt/ Rinse aid light indicator	Yes/Yes	Yes/Yes	Yes/Yes	Yes/Yes	Yes/Yes
End of cycle indicator	Spotlight + buzzer				
Adjustable feet	Yes	Yes	Yes	Yes	Yes
EQUIPMENTS					
Detergent dispenser	-	-	-	-	-
ard basket	Yes	-	-	-	-
Bottom filter	1/2 inox				
SAFETY FEATURES					
AquaSafe (Anti-overflow / Anti-leak)	Yes	Yes	Yes	Yes	Yes
INSTALLATION					
Total power (W)	1930	1930	1930	1250	1930
/oltage (V)/ Frequency (Hz) /Fuse (A)	230/50/10	230/50/10	230/50/10	230/50/10	230/50/10
ength of power supply cord (cm)	150	150	150	150	150
DIMENSIONS- WEIGHT					
Built-in HxWxD (mm)	820X600X580	820X600X580	820X600X580	820X600X580	820X600X580
Jnboxed product HxWxD (mm)	815X598X550	815X598X550	815X598X550	815X598X550	815X598X550
Packed product HxWxD (mm)	890X645X645	890X645X645	890X645X645	890x645x645	890x645x645
Net weight (kg)/Gross weight (kg)	46/39.5	44/37.5	44/37.5	46/39.5	44/37.5
EAN CODE					
Black	3660767984448	3660767984356	3660767978744	3660767984424	3660767978775
loov					

FULL BUILT-IN DISHWASHERS

	60CM	60CM	60CM	60CM	45CM
REFERENCES					
Black	BDJ325LB				VS1010J
Inox		DWJ137DS	DWJ127DS	VH1772J	
White					
GENERAL FEATURES					
Place settings number	13	13	12	12	10
Energy efficiency class	D	Е	Е	Е	Е
Energy consumption 100 cycles					
(kWh/100 cycles)	84	94	92	92	76
Energy consumption per cycle (kWh)	0.836	0.937	0.923	0.923	0.755
Energy consumption in mode :	0.49	0.5	0.49	0.49	0.49
stop (W) Water consumption per cycle					
(L/cycle)	10	11	11	11	9
Duration of program (min)	198	230	230	220	235
Noise emission (dB(A))	45	47	47	47	47
ADDITIONAL FEATURES					
	12	24	24	9	12
Delayed start					
Remaining time	No	Yes	Yes	No	No
Drying mode	Auto open door	Natural convection	Natural convection	Natural convection	Natural convection
PROGRAMMES					
Programmes number / Washing	6/4	6/5	6/5	5/4	6/5
temperatures	_				
Universal 90 min - 65°C	-	Yes Yes	Yes Yes	Yes Yes	Yes Yes
Rapid 30 min	Yes	Yes	Yes	Yes	Yes
Eco	Yes	Yes	Yes	Yes	Yes
Auto	Yes	Yes	-	-	-
OptiA 60 min	Yes	-	-	-	_
Glasses - 40°C	Yes	Yes	Yes	-	Yes
Soaking	-	-	-	-	-
Vortex wash system 60 min	-	-	-	-	-
Quick wash	-	Yes	-	-	-
Intensive - 60°C	Yes	Yes	Yes	Yes	Yes
USER COMFORT					
Electronic type	Leds	Digits	Digits	Leds	Leds
1/2 load function	Yes	Yes	Yes	Yes	Yes
Adjustable upper basket	Yes	Yes	No	Yes	Yes
Adjustable lower basket	Yes	Yes	-	Yes	Yes
Salt/ Rinse aid light indicator	Yes/Yes	Yes/Yes	Yes/Yes	Yes/Yes	Yes/Yes
End of cycle indicator	Spotlight + buzzer	Buzzer	Buzzer	Buzzer	No
Adjustable feet	Yes	Yes	Yes	Yes	Yes
EQUIPMENTS					
	Clidion	Clidion	Clidion	Clidioo	Clidioo
Detergent dispenser	Sliding	Sliding	Sliding	Sliding	Sliding
3rd basket	-	-	-	-	-
Bottom filter	1/2 inox				
SAFETY FEATURES					
AquaSafe (Anti-overflow / Anti-leak)	Yes	Yes	Yes	Yes	Yes
INSTALLATION					
Total power (W)	1930	1930	1930	1930	1800-1930
Voltage (V)/ Frequency (Hz) /Fuse (A)	230/50/10	230/50/10	230/50/10	230/50/10	230/50/10
Length of power supply cord (cm)	150	150	150	150	150
DIMENSIONS- WEIGHT					
Built-in HxWxD (mm)	820X600X580	820X600X580	820X600X580	820X600X580	820X450X580
Unboxed product HxWxD (mm)	815X600X550	815X595X570	815X595X570	815X598X550	815X448X550
Packed product HxWxD (mm)	890x645x645	890x645x645	890x645x645	890x645x645	890x485x635
Net weight (kg)/Gross weight (kg)	44/37.5	35/29	43,5/29	41.5/35.0	36/31
EAN CODE					
Black	3660767978706				3660767956728
Inox		3660767978690	3660767978683	3660767962064	
White					

BUILT-IN DISHWASHERS

	60CM	60CM	60CM	60CM	45CM
REFERENCES					
Black		BDB424LB			
nox	BDB424DX	BDB424LX	BDB325LX	VH1772X	VS1010X
White		BDB424LW			
GENERAL FEATURES			,		
Place settings number	14	14	13	12	10
Energy efficiency class	D	D	D	E	E
Energy consumption 100 cycles	85	85	84	92	76
kWh/100 cycles) Energy consumption per cycle (kWh)	0.849	0.849	0.836	0.923	0.755
Energy consumption in mode :	0.49	0.49	0.49	0.49	0.49
Nater consumption per cycle L/cycle)	10	10	10	11	9
Ouration of program (min)	198	198	198	220	235
loise emission (dB(A))	44	44	45	47	47
ADDITIONAL FEATURES					
lelayed start	24	12	12	24	9
Remaining time	Yes	No	No	Yes	No No
-					
Orying mode	Auto open door	Auto open door	Auto open door	Natural convection	Natural convection
PROGRAMMES					
Programmes number / Washing emperatures	6/4	6/4	6/4	7/5	6/5
Prewash	-	-	-	Yes	- V.
90 min - 65°C	- V	- V	- Van	Yes	Yes
Rapid 30 min 60 min	Yes -	Yes -	Yes Yes	Yes -	Yes -
Eco	Yes	Yes	Yes	Yes	Yes
uto	Yes	Yes	Yes	-	-
OptiA 60 min	Yes	Yes	Yes	-	-
Glasses - 40°C	Yes	Yes	Yes	Yes	Yes
Iniversal	-	-	-	Yes	Yes
Soaking	-	-	-	-	-
ortex wash system 60 min	-	-	-	-	-
Quick wash	-	-	Yes	-	-
ntensive - 60°C	Yes	Yes	Yes	Yes	Yes
USER COMFORT		ı			
lectronic type	Digits	Leds	Leds	Digits	Leds
/2 load function	Yes	Yes	Yes	Yes	Yes
djustable upper basket	Yes	Yes	Yes	Yes	Yes
djustable lower basket	Yes	Yes	Yes	Yes	Yes
Salt/ Rinse aid light indicator	Yes/Yes	Yes/Yes	Yes/Yes	Yes/Yes	Yes/Yes
and of cycle indicator	Buzzer	Buzzer	Buzzer	Buzzer	Buzzer
Adjustable feet	Yes	Yes	Yes	Yes	Yes
EQUIPMENTS		ı			
Detergent dispenser	Sliding	Sliding	Sliding	Sliding	Sliding
rd basket	No	No	No	No	No
Bottom filter	1/2 inox	1/2 inox	1/2 inox	1/2 inox	1/2 inox
SAFETY FEATURES					
iquaSafe (Anti-overflow / Anti-leak)	Yes	Yes	Yes	Yes	Yes
INSTALLATION					
otal power (W)	1930	1930	1930	1930	1930
oltage (V)/ Frequency (Hz) /Fuse (A)	230/50/10	230/50/10	230/50/10	230/50/10	230/50/10
ength of power supply cord (cm)	150	150	150	150	150
DIMENSIONS- WEIGHT					
uilt-in HxWxD (mm)	820X600X580	820X600X580	820X600X580	820X600X580	820X450X580
Inboxed product HxWxD (mm)	815X598X570	815X598X570	815X598X570	815X598X570	815X448X570
Packed product HxWxD (mm)	890X645X645	890X645X645	890X645X645	890X645X645	890X485X635
let weight (kg)/Gross weight (kg)	44/37.5	44/37.5	44/37.5	41.5/35	36/31
EAN CODE					
Black		3660767978737			

FULL BUILT-IN FRONT-LOADING WASHING MACHINE

White	WFB484QJI
GENERAL FEATURES	
Capacity (kg)	9 59
Drum volume (L)	
Maximum spin speed (rpm)	1400
Energy efficiency class	A
Energy consumption (kWh/cycle)	47
Water consumption per cycle on Eco 40-60 program (L/Cycle)	48
Annual energy consumption (kWh/100 cycles)	/ (Old reg)
Programme duration in cotton 60°C full load	ECO 40-60: 03
Weighted power consumption of the off-mode and left-on mode	
Water consumption (L/year) Washing noise level dB(A)	/ (Old reg) 47
Spin noise level dB(A)	74
Duration of program (min)	198
ADDITIONAL FEATURES	190
Delayed start	23
Automatic variable capacity	Yes
Variable thermostat from 0 to 90°C	Yes
PROGRAMMES	
Washing programme number	15
Cotton	Yes
Mixed	Yes
Colours	Yes
Wool	Yes
20℃	Yes
Hand wash	Yes
Rapid 15min	Yes
Intensive	Yes
Eco 40-60°C	Yes Yes
Hygiene Spin speed	Yes
Rapid 60min	Yes
Jeans	Yes
Rinse	Yes
Sport	Yes
OPTIONS	
Rising +	Yes
Prewash	Yes
Steam	Yes
Anti-allergy	Yes
Quick wash Eco Wash	Yes Yes
USER COMFORT	163
Electronic type	Digits
Remaining time	Yes
Display progress of cycle	Digits
3 product dispensers	Yes
Tub / drum material	Inox
Adjustable feet	Yes
SAFETY FEATURES	ies
Anti-overflow	Yes
Child safety	Yes
Anti-drumming system	Yes
Anti pertes lessivielles	Yes
INSTALLATION Total power (W)	2200
Voltage (V)/ Frequency (Hz) /Fuse (A)	220-240 / 50 /
Length of power supply cord (cm)	150
DIMENSIONS- WEIGHT	
Built-in HxWxD (mm) Unboxed product HxWxD (mm)	817x597x54 853x654x60
Packed product HxWxD (mm)	880X730X68
Net weight (kg)/Gross weight (kg)	71 / 72,5
EAN CODE	
White	36607679940

BUILT-IN FRIDGE-FREEZER & FREEZER

REFERENCES	FRIDGE-I	FREEZER		SINGLE DOOR		FREEZER
White	BIC7756EN	BIC1724ES	BIS1224ES	BIL1770EB	BIL1220ES	BIF7855EN
GENERAL FEATURES						
Product type	Combined	Combined	Single door	Single door	Single door	Single door
Construction type	Built-in	Built-in	Built-in	Built-in	Built-in	Built-in
	E	E	E	E	E	E
Energy efficiency class						
Energy consumption (kWh/year) (1)	218	217	146	112	100	236
Net volume Fridge (L)	179	179	167	294	-	
Net volume Freezer (L)	63	70	14	-	-	212
Number of stars	4	4	4	-	-	
Freezer autonomy (h)	8	10	6	-	-	8
Freezing capacity (kg/24h)	3,3	3,2	2	-	-	10
Climatic class	T	ST	ST	SN-ST	SN-ST	ST
Noise emission (dB(A))	41	39	39	39	39	41
Class of environmental noise emissions	С	С	С	С	С	С
ADDITIONAL FEATURES						
Volume net total (L)	242	249	181	294	199	212
Temperature control	Elect	Elect	Elect	Elect	Elect	Elect
Display	External electronics	Internal electronics	Internal electronics	External electronics	Internal electronics	Internal electroni
Reversible door	Yes	Yes	Yes	Yes	Yes	Yes
Door installation	Slided-mounted	Slided-mounted	Slided-mounted	Slided-mounted	Slided-mounted	Slided-mounted
Lighting	Olloco moonico	Giloco iniconceo	Gilded middines	Gilded middined	Onoco mooneco	Led
	Doon.	Doop.	Doop	Doop	Doop	
Gas	R600a	R600a	R600a	R600a	R600a	R600a
FRIDGE						
Cooling type of fridge	Fan assisted	Static	Static	Fan assisted	Static	-
Defrost	Automatic	Manual	Automatic	Automatic	Manual	-
Ventilation	Yes	-	-	-	-	-
Vegetable drawer	1	1	1	2	1	-
Glass shelves	3	3	3	4	3	-
Bottle holder	1	1	-	-	-	-
Balconies	3	2	2	4	2	-
Bottle balconny	1	1	1	1	1	
-	1		1		1	_
Egg section		1		1	'	-
Temperature indicator	Digital	Leds	Leds	Digital	-	-
Lighting	LED	LED	LED	LED	LED	-
Fresh Zone	-	Yes	-	-	-	-
Ultrafresh	Yes	-	-	-	-	-
Smart function	-	Yes	-	-	-	-
FREEZER						
Cooling type of freezer	No Frost	Static	Static	-	-	No Frost
Drawers/ shelves	2/1	3/-	1/-	_	_	4/4
Ice cube trays	Yes	Yes	Yes	_	_	? / Yes
-	Automatic	Manual	Manual			
Defrost	Autumatic	INIGITION	INIQUIDI			Automatic
Visual/sound temperature alarm	-	-	-	-	-	No/Yes
Visual/sound door alarm	No/Yes	-	-	-	-	No/Yes
Fast cooling switch	-		-	-	-	-
Fresh foods	Yes	-	-	-	-	-
Boost function	-	Yes	-	-	-	Yes
Twist ice						Yes
INSTALLATION						
Total power (W)	218	115	100	98	80	210
Daily energy consumption (kWh/24h)	-	0.595			-	- 1-
Annual energy consumption (kWh/year)		0.333				
	220 246/52/245	220 240/52/25	220 240/52/25	220 240/52/25	220 240/52/25	220 242/52/5
Voltage (V)/ Frequency (Hz) /Fuse (A)	220-240/50/0.85	220-240/50/0.75	220-240/50/0.75	220-240/50/0.5	220-240/50/0.6	220-240/50/0.5
DIMENSIONS- WEIGHT						
Built-in HxWxD (mm)	1770X560X560	1770X560X560	1220X560X560	1770X560X560	1220X560X560	1785X560X560
Unboxed product HxWxD (mm)	1770X540X545	1785X540X540	1230X540X540	1770X540X545	1230X540X540	1785X540X54
Packed product HxWxD (mm)	1834X584X577	1845X575X560	1292X575X560	1834X584X577	1292X575X560	1788X560X550

3660767990166 3660767981478 3660767991927 3660767991200 3660767991941 3660767989245

WINE CELLARS

REFERENCES						
Black	BIW36FB	BIW28FB	BUW20FB			
GENERAL FEATURES						
Construction type	Built in	Built in	Built in			
Energy efficiency class	F	F	F			
Energy consumption (kWh/year) (1)	102	99				
Net volume (L)	92	62	56			
Climatic class	SN-ST	SN-ST	SN-ST			
Noise emission (dB(A))	41	39	41			
ADDITIONAL FEATURES						
Bottle number	36	28	20			
Cooling system	Fan	Fan	Fan			
Strucutre	Black	Black	Black			
Door finishing	Anti-vibration system	Anti-vibration system	Anti-vibration syster			
Thermostat	Electronic	Electronic	Electronic			
Gas	R600a	R600a	R600a			
USER COMFORT						
Shelves	5/Wood	2/Wood	5/Wood			
Reversible door with handle	No	No	No			
Lighting	LED	LED	LED			
INSTALLATION						
Electrical consumption (kWh/24h)						
Power (W)	65	65	65			
Voltage (V)/ Frequency (Hz) / Fuse (A)	220-240/50	220-240/50	220-240/50			
Length of power supply cord (cm)	150	150	150			
DIMENSIONS- WEIGHT						
Built-in HxWxD (mm)	590X560X560	590X560X560	825X575X?			
Unboxed product HxWxD (mm)	595X590X563	455X590X563	820X295X570			
Packed product HxWxD (mm)	655X650X696	515X696X650	865X390X625			
Net weight (kg)/Gross weight (kg)	33/38	26.6/30	27.1/30.7			
EAN CODE						
Black	3660767989993	3660767989924	3660767989719			

Brandt



Brandt

89, boulevard Franklin Roosevelt - 92854 Rueil-Malmaison Cedex - France

Edition November 2023